22

U.S. PUBLIC LAND CORNER MAINTENANCE

Corner ID : S1/4 Sec. 1, T16N-R1E

41601010020

DATE	CREW	MONUMENT TYPE ----------
April 15, 2016	Zachariah P.Dechant Gary L. Dechant	Found Harrison intact at fence corner. Set new survey sign 1' south.

References:	Bearing		Distance
1) Existing nail in hole on face of stone ledge, 1' up from ground level	N50E	slope distance	22.65' (21.55')
2) Set ¾"x24" iron pipe, down 6", 4' north of fence	NE		10.78'
3) Existing cross on ledge 3' up from ground level	S85E	slope distance	44.22' (43.58)
4) Set ¾"x24" iron pipe, down 6", 15' south of fence 3' south of 10" Red Oak	SE		17.57'
5) Set 3/4" x24" iron pipe 4' SE of 15" Black Oak (BT) **(Distance to nail in tree checks, 23.66')**	N71W		19.62'

Gary L. Dechant

WISCONSIN
GARY L.
DECHANT
S-1744
CAMP
DOUGLAS, WI
LAND SURVEYOR

April 15, 2016

CERTIFICATE

I, Gary L. Dechant, do hereby certify that on the 7th day of May 19 93, I found (evidence) ~~(no evidence)~~ of the N¼ corner of Section 12, T 16 N, R 1 E Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 10th day of May 1993.

Gary L. Dechant

R.L.S. 1744
Title

CERTIFIED LAND CORNER 4160101 0020 No. 22

History of corner establishment since Original Government Survey

J. Carroll set an 1¼" iron pipe here in 1988.

Description of corner evidence found:

Found Carroll's iron pipe tipped. Accepted it as the corner as it fits other section datum very weal and replaced the iron pipe with a TCP monument.

COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

David E. Madison

Gary L. Dechant

Gary L. Dechant
WISCONSIN
GARY L. DECHANT
S-1744
CAMP
DOUGLAS, WI
LAND SURVEYOR
May 10, 1993

Set TCP Monument, set survey sign 1' west, dug smaal pit 2½' N45E.

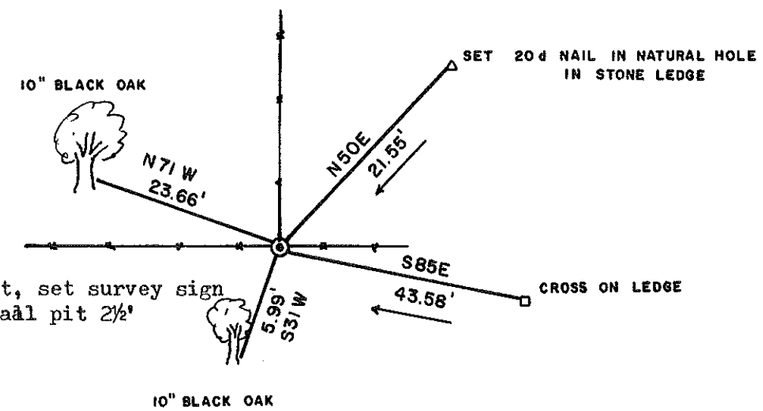

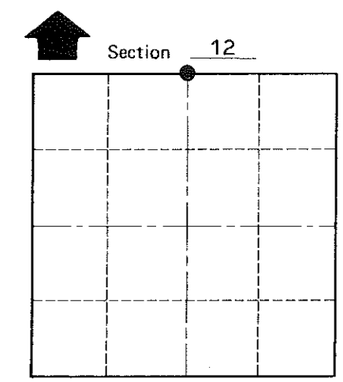

O = LOCATION CORNER

T 16 N R 1 E

WISCONSIN

(Trees double blazed with 20d nails set)
(Arrow indicates slope distance and direction of slope)

SURVEY CONTROL ORDER

Horizontal	
Vertical	

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~City, Village or~~ Town Clifton

County of Monroe