

CERTIFICATE

CERTIFIED LAND CORNER

No. 43

41601110000

I, William C. Jung, do hereby certify that on the 29th day of March 19 78, I found (evidence) (~~no evidence~~) of the N.E. corner of Section 14, T 16 N, R 1 E, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

History of original corner establishment:

Fred Holden was here in November of 1907, and found the original corner.

Description of corner evidence found:

Set the corner 80 rods North of the occupied 1/8 corner and on line with the old fence to the South. Aerial photos and field measurements show this fence to the South to be good for alignment. With this corner as set being accepted, the greater bulk of the existing field evidence in Section 14 fits together. The 1/8 fence 80 rods South and the "20" fence 120 rods South were probably set off this position with the shortage having been "dropped" in the bluff.

Dated this 22nd day of NOV. 19 78.

William C. Jung, R.L.S. 1323

County Surveyor's Office

COUNTY SURVEYOR FORM NO. 1





Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Both bearing trees were double blazed with a N&C set in each.

Witnesses to corner location:

C. Pietz

G. Dechant

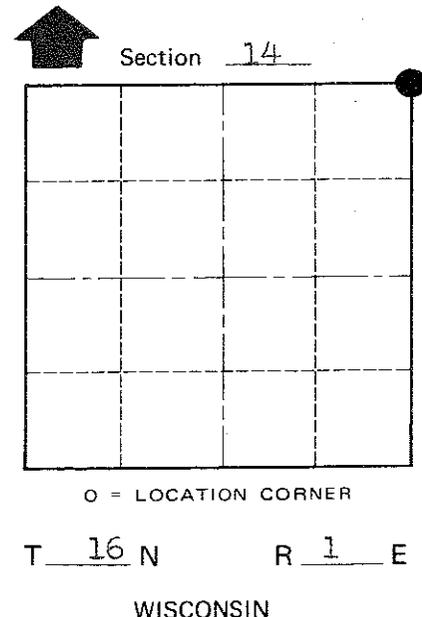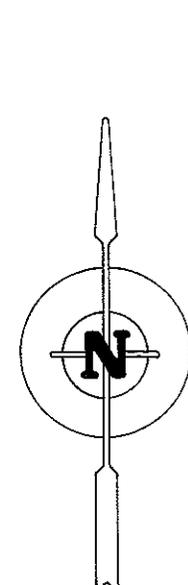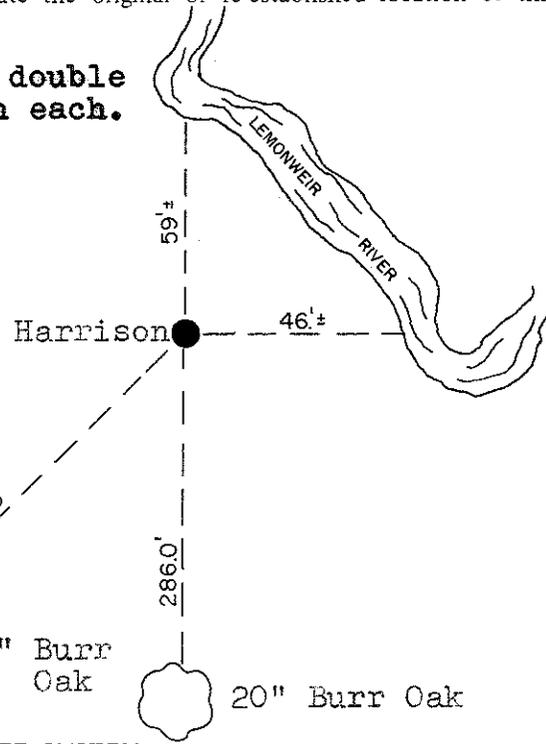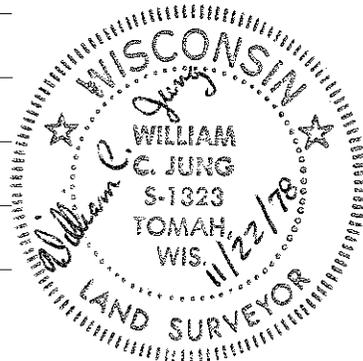

SURVEY CONTROL ORDER

Approved by: Harley Sime  
County Surveyor 24" Burr Oak

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town Clifton

County of Monroe