

# JUNEAU COUNTY SURVEY MONUMENT RECORD

CORNER NO. 54  
SECTION 18  
TOWN 16 N.  
RANGE 2 E.

TYPE OF MONUMENT: 2" DIAMETER IRON PIPE FOUND


JUNEAU COUNTY COORDINATES NAD 83/91  
NORTHING: 183,432.92  
EASTING: 400,725.95

■ = CORNER MONUMENT RESTORED

BASIS FOR MONUMENT LOCATION  
(USE REVERSE SIDE IF NECESSARY)

SHOW INFO SUCH AS: HISTORY OF CORNER, WITH REFERENCE TO VOLUME AND PAGE DATES, SURVEYOR, EXACT DESCRIPTION OF MONUMENT PLACED OR FOUND, IF LOCATION COMPUTED, BY TAPED OR EDM TRAVERSE, LANDOWNER REMARKS, ETC.

ON HIS TIE SHEET DATED 10/3/81, JAMES CARROLL CALLS FOR A RAILROAD SPIKE WHICH I DID NOT FIND. I DID FIND A 2" DIA. IRON PIPE WHICH FIT THE TOWN LINE EXTREMELY WELL.

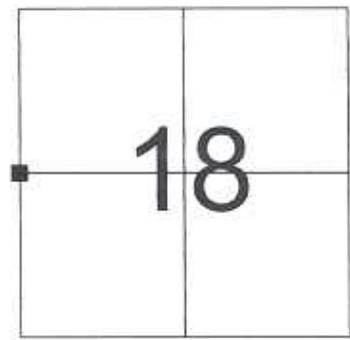

LOCATION

## LEGEND

- = 2" DIAMETER IRON PIPE FOUND
- = 3/4" X 24" IRON ROD SET
- = 1-1/2" DIAMETER IRON PIPE FOUND
- λ = GOVERNMENT SIGN



TIE SKETCH  
(SHOW AT LEAST FOUR TIES)

Az. 350°53'18"  
101.30 FT.

CERTIFIED CORRECT

*Patrick J. Dederich*  
REGISTERED LAND SURVEYOR

DATE 12/4/2007

Az. 308°55'25"  
36.10 FT.

LAWN

33rd LANE

1' +/-

ROCK FACE

Az. 184° MAG.  
37.85 FT.

Az. 211° MAG.  
78.97 FT.

NOT TO SCALE



AZIMUTHS ARE BASED  
ON THE JUNEAU COUNTY  
COORDINATE SYSTEM  
UNLESS OTHERWISE NOTED

# JUNEAU COUNTY SURVEY MONUMENT RECORD

CORNER NO. 54  
SECTION 18  
TOWN 16 N.  
RANGE 2 E.

TYPE OF MONUMENT: 2" DIAMETER IRON PIPE FOUND


JUNEAU COUNTY COORDINATES NAD 83/91  
NORTHING: 183,432.92  
EASTING: 400,725.95

■ = CORNER MONUMENT RESTORED

BASIS FOR MONUMENT LOCATION  
(USE REVERSE SIDE IF NECESSARY)

SHOW INFO SUCH AS: HISTORY OF CORNER, WITH REFERENCE TO VOLUME AND PAGE DATES, SURVEYOR, EXACT DESCRIPTION OF MONUMENT PLACED OR FOUND, IF LOCATION COMPUTED, BY TAPED OR EDM TRAVERSE, LANDOWNER REMARKS, ETC.


ON HIS TIE SHEET DATED 10/3/81, JAMES CARROLL CALLS FOR A RAILROAD SPIKE WHICH I DID NOT FIND. I DID FIND A 2" DIA. IRON PIPE WHICH FIT WELL.



LOCATION

## LEGEND

- = 2" DIAMETER IRON PIPE FOUND
- = 3/4" X 24" IRON ROD SET
- = 1-1/2" DIAMETER IRON PIPE FOUND
- λ = GOVERNMENT SIGN

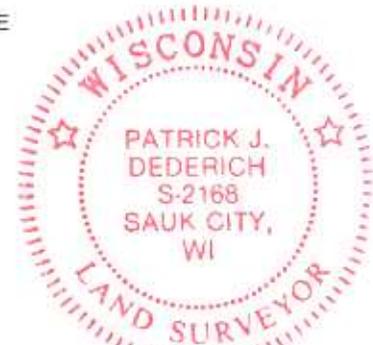

TIE SKETCH  
(SHOW AT LEAST FOUR TIES)

Az. 350°53'18"  
101.30 FT.

CERTIFIED CORRECT

*Patrick J. Dederich*  
REGISTERED LAND SURVEYOR

DATE 10/19/2007

Az. 308°55'25"  
36.10 FT.

LAWN

33rd LANE

1'±

ROCK FACE

Az. 184° MAG.  
37.85 FT.

Az. 211° MAG.  
78.97 FT.

NOT TO SCALE



AZIMUTHS ARE BASED  
ON THE JUNEAU COUNTY  
COORDINATE SYSTEM  
UNLESS OTHERWISE NOTED

# JUNEAU COUNTY

## Survey Monument Record

TYPE OF MONUMENT: HARRISON

STATE PLANE COORDINATES: N \_\_\_\_\_


E \_\_\_\_\_

ELEVATION — M.S.L. DATUM: \_\_\_\_\_

THETA ANGLE: \_\_\_\_\_

FIELD BOOK: \_\_\_\_\_ PAGE \_\_\_\_\_

CORNER NO. 54  
SECTION 18  
TOWN 16  
RANGE 2E



LOCATION  
(Indicated by 'X')

SEAL:

### BASIS FOR MONUMENT LOCATION

(Use reverse side if necessary)

Show info such as: History of corner, with reference to Vol. and pg. dates, surveyor; exact description of monument replaced; if location computed, by taped or EDM traverse; landowner remarks, etc.


**REPLACED RR SPIKE**

An extensive EDM survey was made for the relocation of C.T.H. "A". This RR spike fit this corner location from these computations. Accepted as the corner location.

CERTIFIED CORRECT:  
James J. Carroll  
Registered Land Surveyor  
DATE: 10/9/85

### TIE SKETCH

(Show at least four ties)

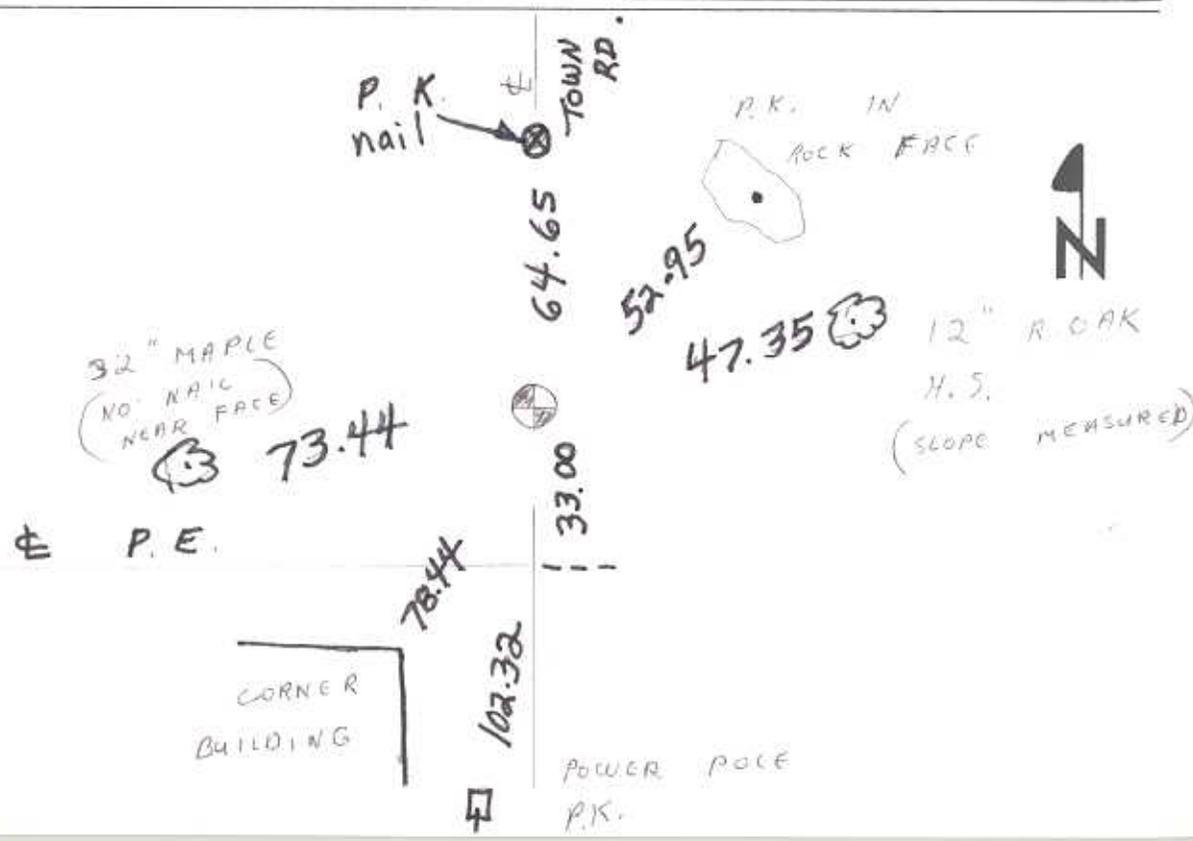

JUNEAU COUNTY

Survey Monument Record

TYPE OF MONUMENT: A. R. SPIKE

STATE PLANE COORDINATES: N \_\_\_\_\_  
E \_\_\_\_\_

ELEVATION — M.S.L. DATUM: \_\_\_\_\_

THETA ANGLE: \_\_\_\_\_

FIELD BOOK: \_\_\_\_\_ PAGE \_\_\_\_\_


Page 1  
54

CORNER NO. \_\_\_\_\_

SECTION 18

TOWN 16 N

RANGE 2 E



LOCATION  
(Indicated by 'X')

SEAL:

BASIS FOR MONUMENT LOCATION

(Use reverse side if necessary)

Show info such as: History of corner, with reference to Vol. and pg. dates, surveyor; exact description of monument replaced; if location computed, by taped or EDM traverse; landowner remarks, etc.

RR Spike found in place  
Fits section protraction  
bearings and field evidence  
Accepted as the true  
Corner location


CERTIFIED CORRECT:

James J. Carroll  
Registered Land Surveyor

DATE: Oct. 3, 1981

TIE SKETCH

(Show at least four ties)

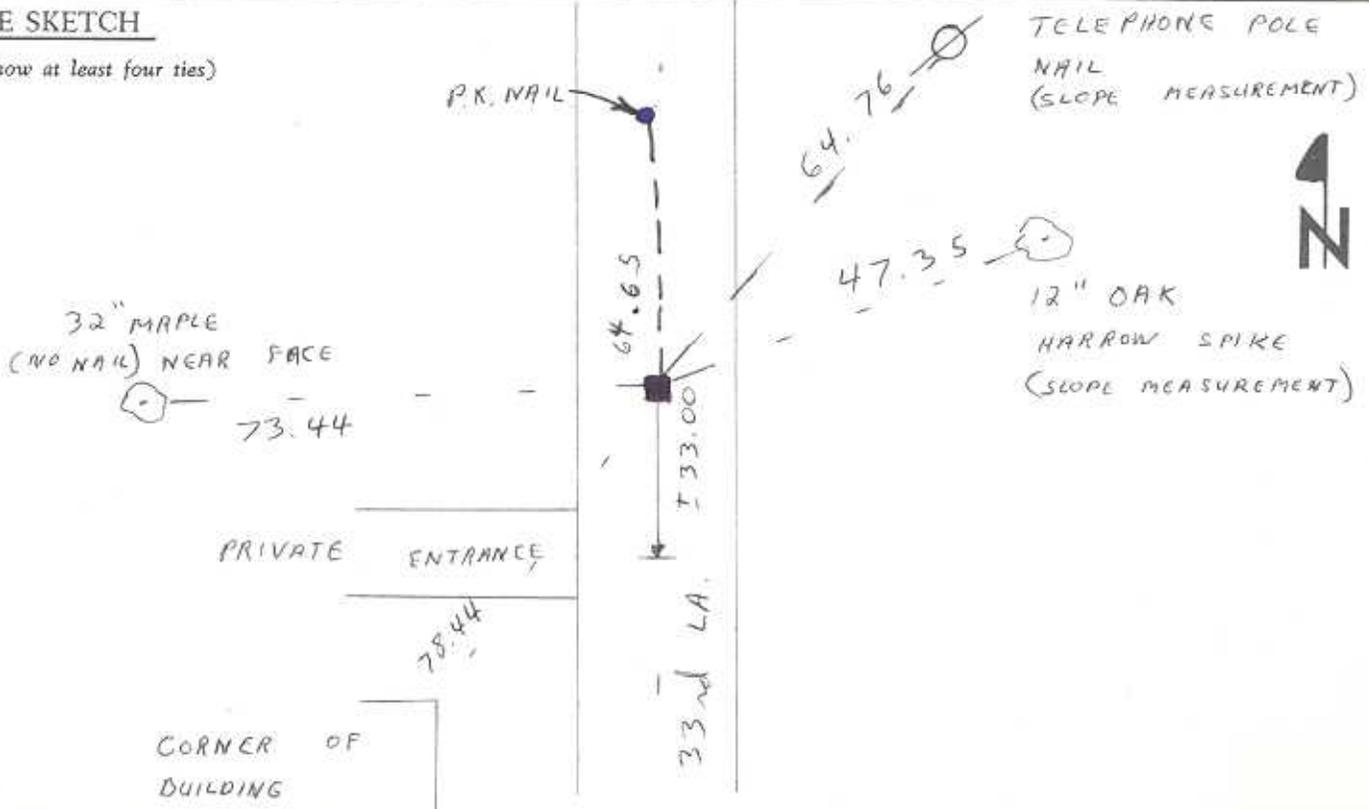

CERTIFICATE

CERTIFIED LAND CORNER

No. 60

**41601132000**

I, Gary L. Dechant, do hereby certify that on the 24th day of July 19 91, I found ~~(evidence)~~ (no evidence) of the E/4 corner of Section 13, T 16 N, R 1 E Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 30th day of July 19 91.

*Gary L. Dechant*

Reg. Land Surveyor, S1744  
Title

History of corner establishment since Original Government Survey

No known history since the original government survey.

Description of corner evidence found:

Set by single proportionate measurement. Half mile distance to section corners being 2639.33'. Fits an east-west fence line to the west behind Miles Connor's barn reasonably well, as well as occupied section line fence to the south.

This corner location is agreed to by James Carroll, Juneau County Surveyor.


COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

Zachariah P. Dechant

Gary L. Dechant

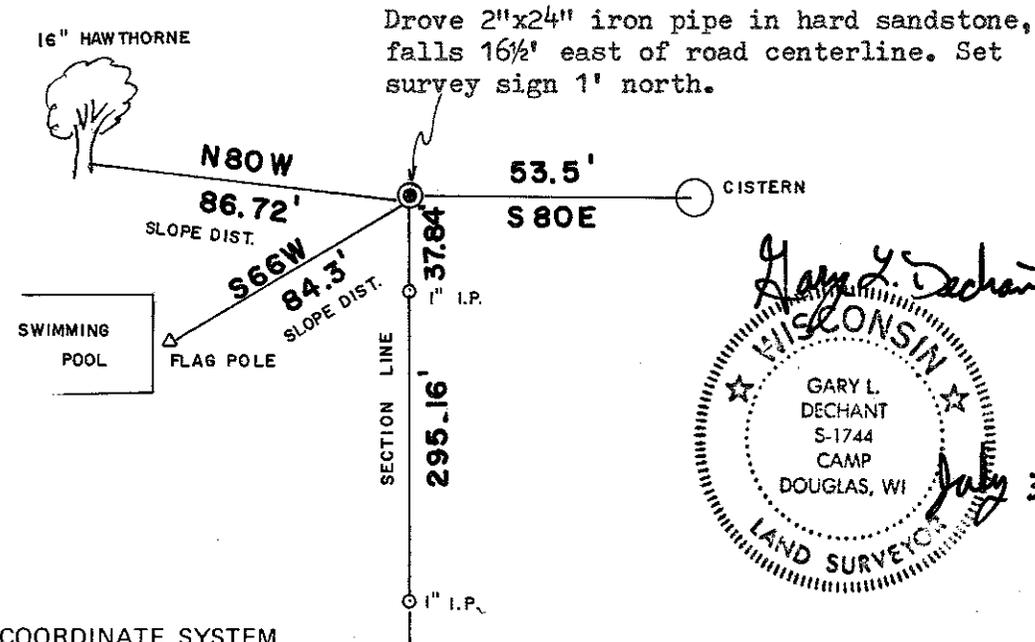


*Gary L. Dechant*

WISCONSIN

GARY L. DECHANT  
S-1744  
CAMP DOUGLAS, WI

LAND SURVEYOR

*July 30, 1991*

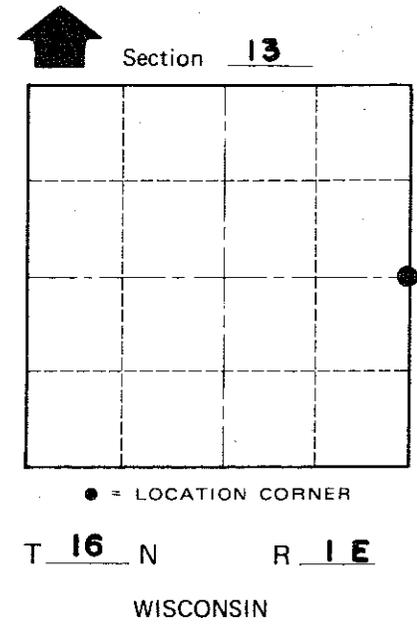

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town CLIFTON  
County of MONROE