


CERTIFICATE

I, Laurence E Johns III, do hereby certify that on the 13th day of July, 2009, I found ~~(evidence)~~ (no evidence) of the S 1/4 corner of Section 33, T16N, R1E, Fourth Principle Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 13th day of July, 2009.



Laurence E Johns III RLS 2804
Eagle Ridge Surveying
PO Box 213
Wilton, WI 54670

CERTIFIED LAND CORNER

History of corner establishment since Original Government Survey


This corner was established by George Stuntz and James Sargent in August 1851. No record of any other survey since.

Description of corner evidence found:


There is no good evidence of a corner location. After checking fences East and West and fence occupation at CTH 'N' to the North, I determined that the fences did not work with other existing corners. I did find an existing 3/4" iron rod at a fence post, but there is no record of its origin. After much deliberation accepted the straight-line split as the best possible location of this corner.

41601330020

No. 128

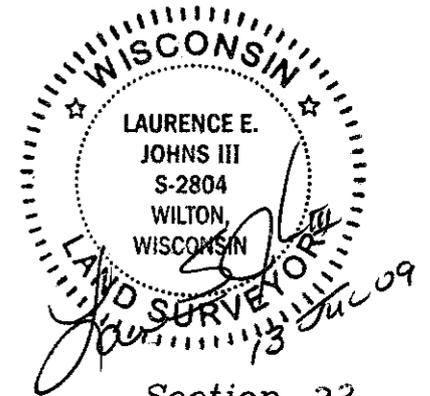

Section 33

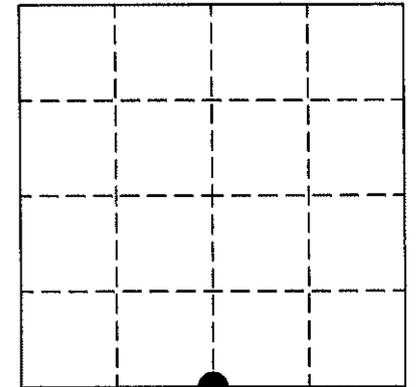

● = LOCATION CORNER
T16N R1E
WISCONSIN


COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witness to corner location:

Laurence E Johns III

Larry Handschy

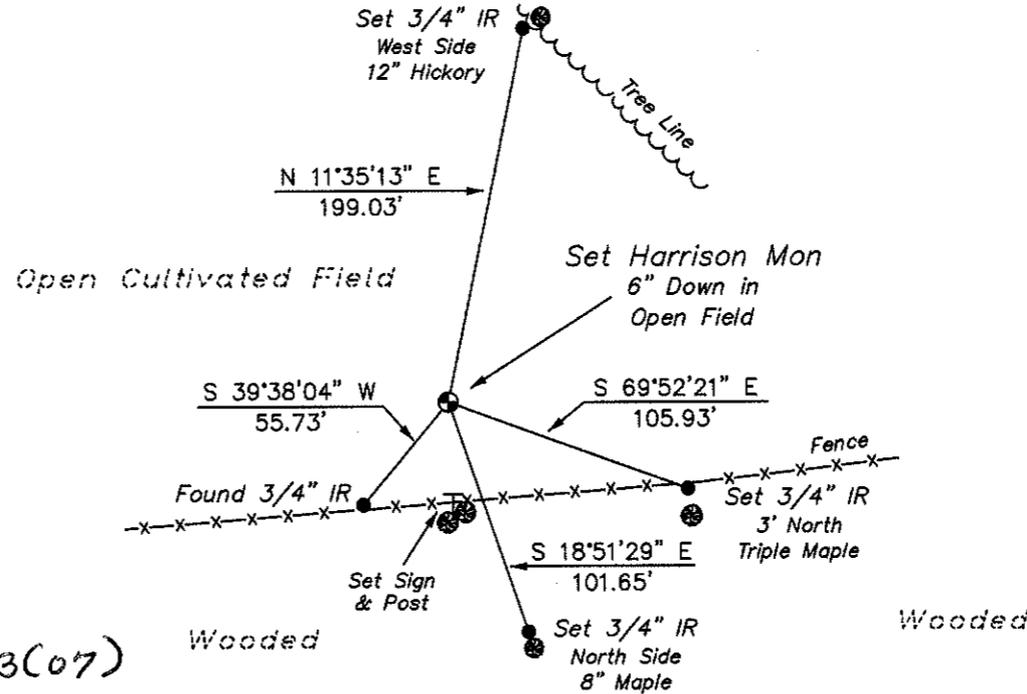

b.b. NAD 83(07)
MONROE COUNTY COORDINATE SYSTEM

SURVEY CONTROL ORDER

Horizontal
Vertical

Corner	East North G.S.	North East G.S.	Elevation (Z)	Zone
	332746.767	739546.512		
Control Sta. Name				

City, Village or Town Clifton

County of Monroe