

41601340000

I, Harley A. Sime, do hereby certify that on the 30th day of July 1981, I found ~~(evidence)~~ (no evidence) of the SE corner of Section 34, T 16 N, R 1 E Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 5th day of August 1981.

Harley A. Sime, R.L.S. 355
County Surveyor

History of corner establishment since Original Government Survey

No known recorded history since the original government survey.

Description of corner evidence found:

Set by projecting bearing between E $\frac{1}{4}$ corner and the NE corner of the SE $\frac{1}{4}$ -NE $\frac{1}{4}$ (existing fence) of Section 3 north, and at proportionate distance to the original government notes from said E $\frac{1}{4}$ corner of Section 3 equal to the ratio of proportion found between the original notes and measured distance between the East 1/4 of Section 3 and Southeast corner of Section 3-T15N-R1E. Trial and error shows that single proportionate measurement along the Town Line will not work for this corner as this in no way would come close to fitting existing conditions that have long been held to be correct by area landowners.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

G. Dechant



B. Meyer

C. Pietz

COUNTY SURVEYOR FORM NO. 1



Set Harrison, flush, 4'+ west of road centerline

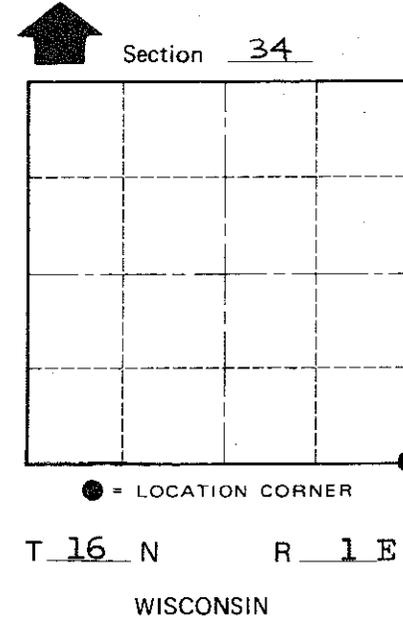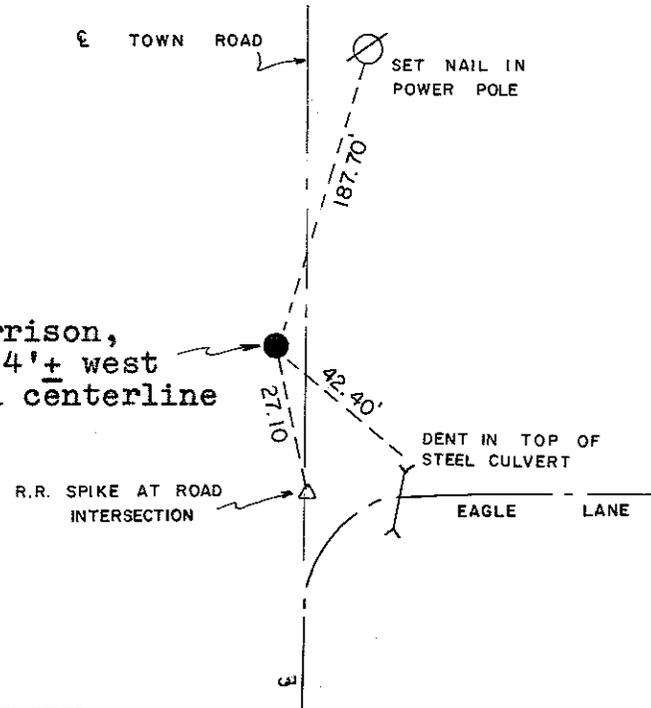

Approved: HARLEY A. SIME
MONROE CO. SURVEYOR

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~City, Village or~~ Town Clifton
County of Monroe