

24


**U.S. PUBLIC LAND CORNER
MAINTENANCE**

**Corner ID : S1/4 Sec.2, T17N-R1E
41701020020**

<u>DATE</u>	<u>CREW</u>	<u>MONUMENT TYPE</u> -----
August 12, 2015	Zachariah P. Dechant Gary L. Dechant	Harrison gone. Found railroad spike at corner. 7' north of centerline Gypsum Ave. Pulled railroad spike and set 3/4"x24" hexagon iron bar down 10" Reset RRS over hex iron bar. 15' east of ditch going south. 36' east of power line.

References:

	<u>Bearing</u>	<u>Distance</u>
1) Existing 1" iron pipe 15' north of centerline road	N84E	55.33' (55.22')
2) Set 3/4"x24" iron pipe, down 6", 14' south of centerline road	S56E	32.97'
3) Existing 1" iron pipe 15' south of centerline road	S68W	48.87' (48.83)'
4) Set 3/4"x24" iron pipe 4' east of power pole. Down 12"	N45W	48.48'

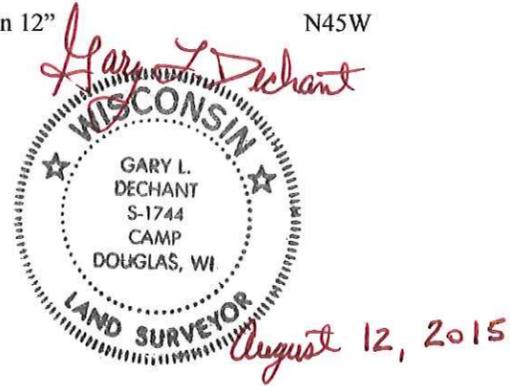

I, Garold A. Sime, do hereby certify that on the 11th day of July 1991, I found (evidence) ~~(no evidence)~~ of the S $\frac{1}{4}$ corner of Section 2, T 17 N, R 1 E Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 15th day of August 1991.

Garold A. Sime

Monroe County Surveyor
Title

History of corner establishment since Original Government Survey
 Fred Holden calls for a stone at this corner in his survey in Section 2, recorded the 4th of March, 1901.
 In May of 1980, William Jung set an iron bar at a point on line and at the prorated distance between the Southeast section corner and the SW corner of the SE $\frac{1}{4}$ -SW $\frac{1}{4}$ of Sec. 2.

Description of corner evidence found:
 I found William Jung's iron bar and accepted same as corner after excavating for Holden's stone monument with backhoe. I also excavated for Holden's stone markers at the SE corner of the SW $\frac{1}{4}$ -SE $\frac{1}{4}$ and at the Northwest corner of the SE $\frac{1}{4}$ -SW $\frac{1}{4}$. None of Holden's stones were located. It is my opinion that the stones were destroyed during road construction.

See Reverse Side For Maintenance

COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:




Set cast iron Harrison Monument at corner.

Witnesses to corner location:

Garold A. Sime, R.L.S.

John Kenworthy

Brent Kostka

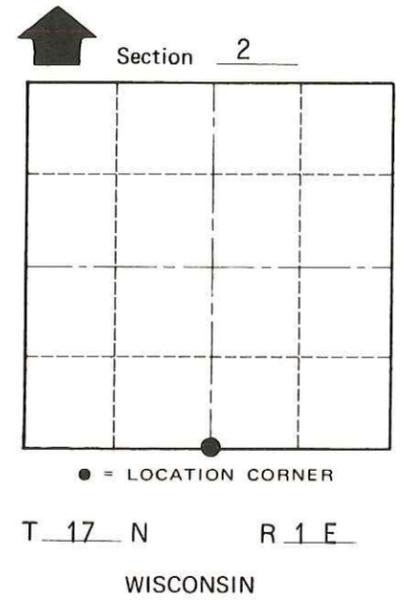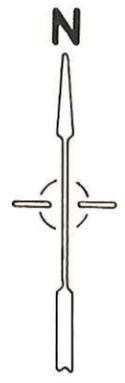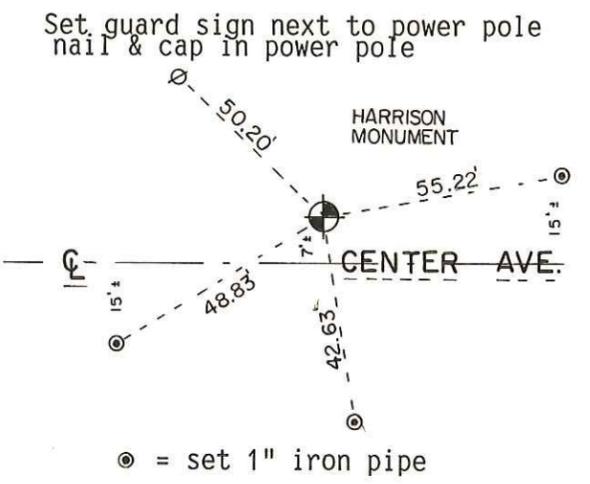

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town of Oakdale
 County of Monroe