

41701020030

I, Garold A. Sime, do hereby certify that on the 9th day of May 19 91, I found (evidence) (~~XXXXXXXX~~) of the S1/16SW corner of Section 2, T 17 N, R 1 E Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 11th day of July 19 91.

Garold A. Sime

Monroe County Surveyor
Title

History of corner establishment since Original Government Survey

Fred Holden established this corner in his survey of Section 2 in March of 1901. William Jung set a 1 1/4" Iron Bar at this corner at the recorded bearing and distance from Holdens bearing tree in May of 1980. Gary Dechant used this iron bar in his Certified Survey dated May 11th, 1991.

Description of corner evidence found:

I found Mr. Jungs Iron Bar at the corner and referenced same.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

1 1/4" Iron Bar at corner


Witnesses to corner location:

Garold A. Sime, R.L.S.




Bryan H. Meyer, R.L.S.

John Kenworthy

Brent Kostka

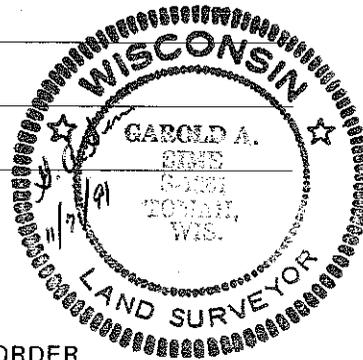

COUNTY SURVEYOR FORM NO. 1

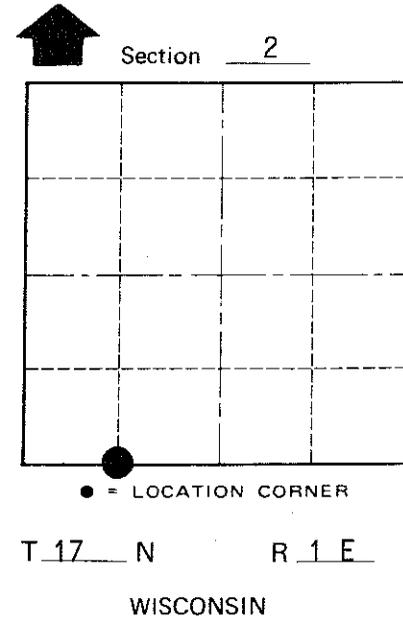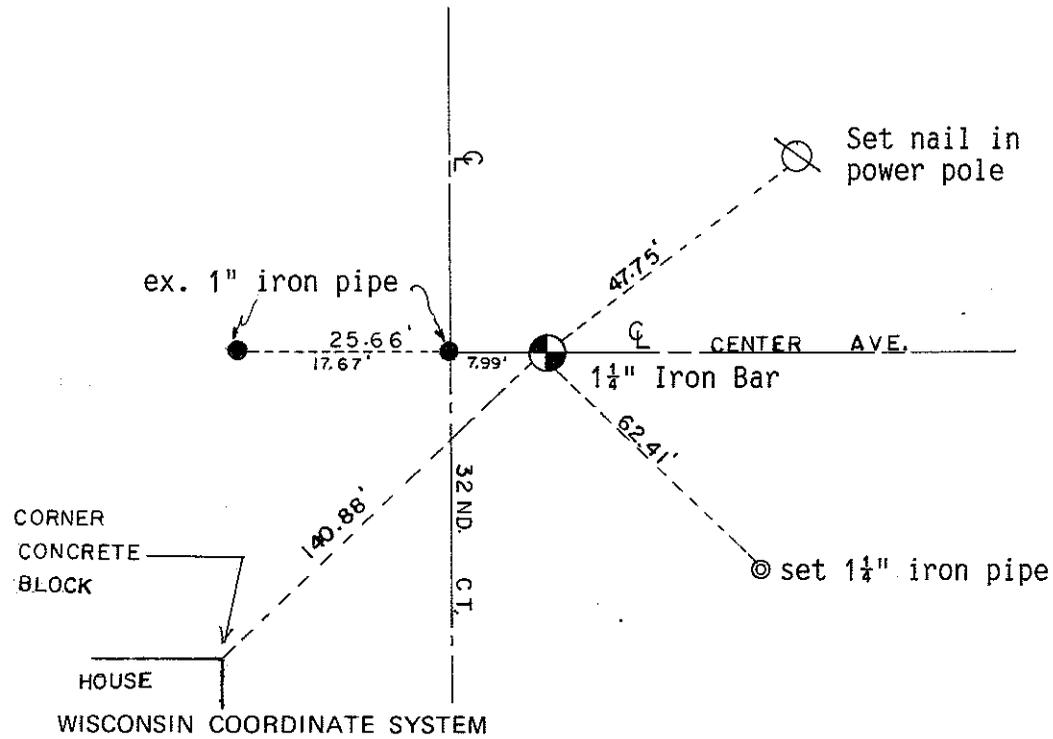

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town of Oakale
County of Monroe