


U.S. PUBLIC LAND SURVEY MONUMENT RECORD MONROE COUNTY, WISCONSIN.

IN ACCORDANCE WITH WISCONSIN ADMINISTRATIVE CODE, CHAPTER A-E 7.08 (3) (A) - (I)

LOCATION: (A) THE IDENTITY OF THE CORNER, AS REFERENCED TO THE U.S. PUBLIC LAND SURVEY SYSTEM.


SECTION 1 - TOWN 17N - RANGE 1E

TOWNSHIP OF OAKDALE
 TYPE OF CORNER W1/4 CORNER
 TYPE OF MONUMENT HARRISON MONUMENT
 HORIZONTAL DATUM MONROE CO. COORDINATES
 NORTHING / LATITUDE 390965.88
 EASTING / LONGITUDE 752359.76

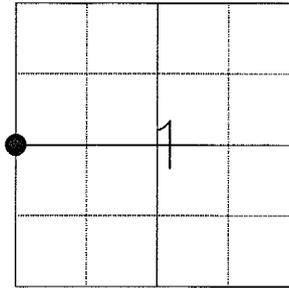

PLAN VIEW: (C) REFERENCE TO AT LEAST 4 WITNESS MONUMENTS. WITNESS MONUMENTS SHALL BE CONCRETE, NATURAL STONE, IRON, BEARING TREES OR OTHER EQUALLY DURABLE MATERIAL, EXCEPT WOOD OTHER THAN BEARING TREES; (D) A PLAN VIEW DEPICTING THE RELEVANT MONUMENTS AND REFERENCE TIES WHICH ARE SUFFICIENT IN DETAIL TO ENABLE ACCURATE RELOCATION OF THE CORNER MONUMENT IF THE CORNER MONUMENT IS DISTURBED; (E) A DESCRIPTION OF ANY MATERIAL DISCREPANCY BETWEEN THE LOCATION OF THE CORNER AS RESTORED OR REESTABLISHED AND THE LOCATION OF THAT CORNER AS PREVIOUSLY RESTORED OR REESTABLISHED;

- T1 N32°31'02"W 45.69'
- T2 N0°39'14"W 16.55'
- T3 N84°53'42"E 80.08'
- T4 S0°43'02"E 16.55'

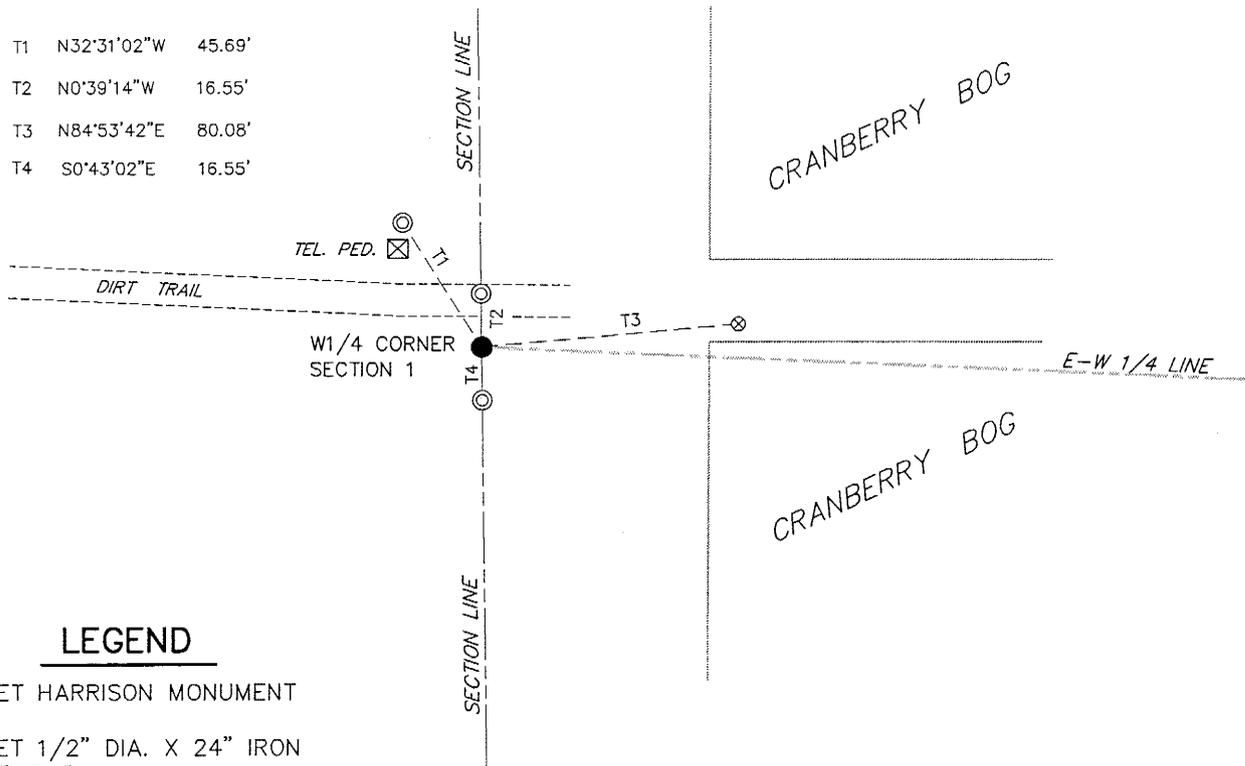

LEGEND

- SET HARRISON MONUMENT
- ⊗ SET 1/2" DIA. X 24" IRON RE-BAR
- ⊙ SET 3/4" DIA. X 24" IRON RE-BAR, 1.50 LBS./LIN.FT.

SURVEYOR'S CERTIFICATE: CHAPTER 7.08 (3) (I)

THE UNDERSIGNED HEREBY CERTIFIES THAT THE U.S. PUBLIC LAND SURVEY MONUMENT RECORD SHOWN WAS DETERMINED BY THEM OR UNDER THEIR DIRECTION AND IS CORRECT TO THE BEST OF THEIR KNOWLEDGE AND BELIEF.



James C. Schroeder
 WISCONSIN REGISTERED LAND SURVEYOR

12/07/10
 DATE CERTIFIED

41701022000
19

U.S. PUBLIC LAND SURVEY MONUMENT RECORD MONROE COUNTY, WISCONSIN.


IN ACCORDANCE WITH WISCONSIN ADMINISTRATIVE CODE, CHAPTER A-E 7.08 (3) (A) - (I)

RECOVERY PROCEDURES:

- (B) A DESCRIPTION OF ANY RECORD EVIDENCE, MONUMENT EVIDENCE, OCCUPATIONAL EVIDENCE, TESTIMONIAL EVIDENCE OR ANY OTHER MATERIAL EVIDENCE CONSIDERED BY THE SURVEYOR, AND WHETHER THE MONUMENT WAS FOUND OR PLACED;
- (F) WHETHER THE CORNER WAS RESTORED THROUGH ACCEPTANCE OF AN OBLITERATED EVIDENCE LOCATION OR A FOUND PERPETUATED LOCATION;
- (G) WHETHER THE CORNER WAS REESTABLISHED THROUGH LOST-CORNER PROPORTIONATE METHODS;
- (H) THE DIRECTIONS AND DISTANCES TO OTHER PUBLIC LAND SURVEY CORNERS WHICH WERE USED AS EVIDENCE OR USED FOR PROPORTIONING IN DETERMINING THE CORNER LOCATION;


CORNER WAS DESTROYED BY CONSTRUCTION OF CRANBERRY BOG. CORNER WAS TIED IN BY FEDDERSEN IN 1978. HIS SECTION SUMMARY GAVE BEARINGS AND DISTANCES TO ADJACENT CORNERS IN SECTION 1.

CORNER WAS RESET BY RETRACING SECTION 1 SECTION SUMMARY.

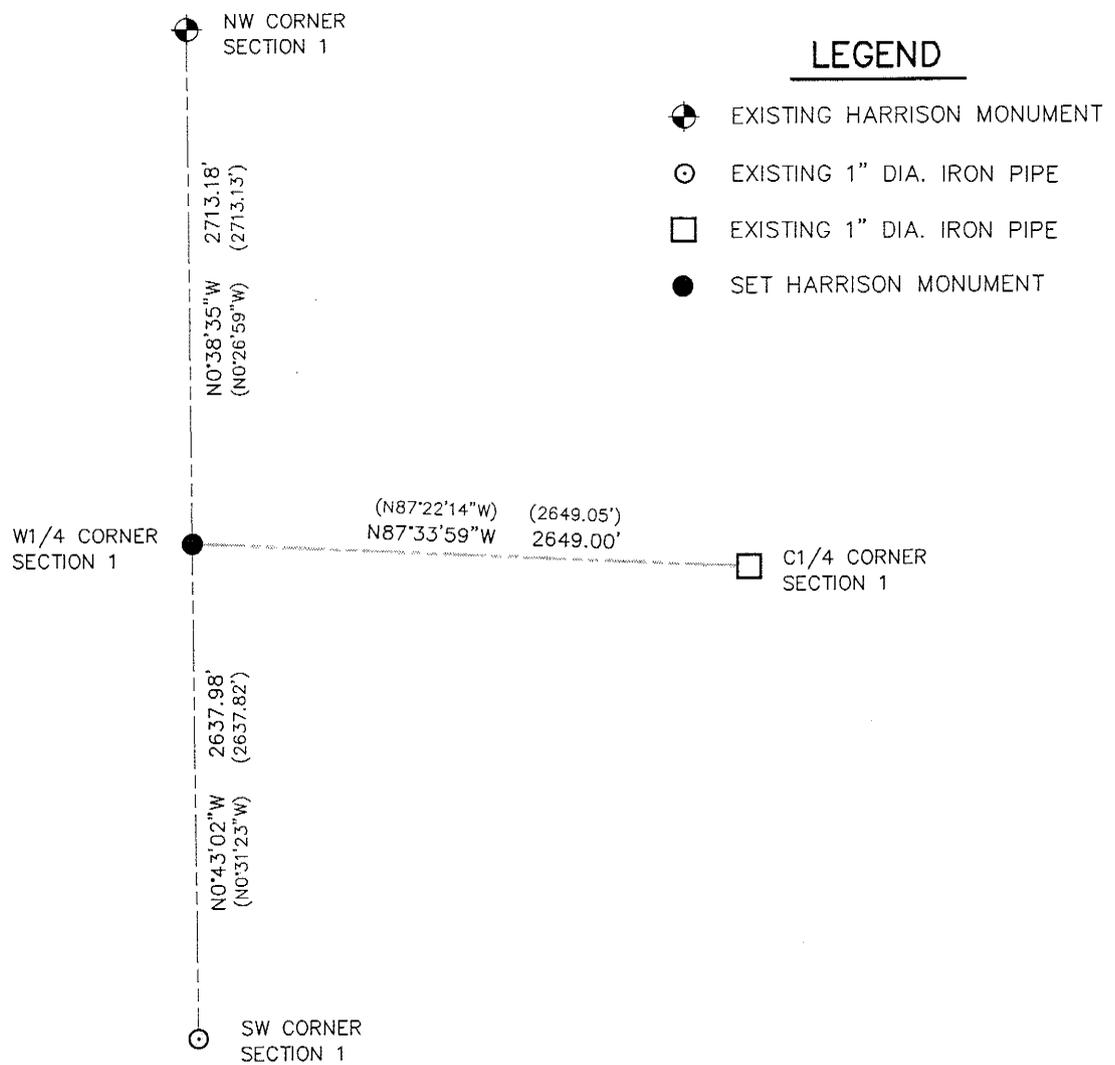

SURVEYOR'S CERTIFICATE: CHAPTER 7.08 (3) (I)

THE UNDERSIGNED HEREBY CERTIFIES THAT THE U.S. PUBLIC LAND SURVEY MONUMENT RECORD SHOWN WAS DETERMINED BY THEM OR UNDER THEIR DIRECTION AND IS CORRECT TO THE BEST OF THEIR KNOWLEDGE AND BELIEF.

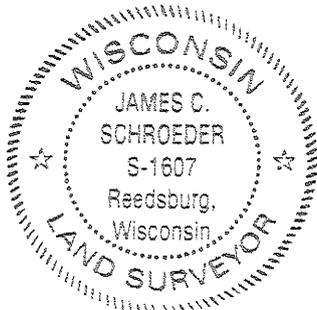

James C. Schroeder
 WISCONSIN REGISTERED LAND SURVEYOR

12/07/2010
 DATE CERTIFIED

CERTIFICATE

CERTIFIED LAND CORNER

No. 19

I, Douglas J. Malliet, do hereby certify that on the 24th day of July 19 78, I found ~~remains~~ (no evidence) of the W¹/₄ corner of Section 1, T 17 N, R 1 E, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 1 day of Aug. 1978.

Douglas J. Malliet

REGISTERED LAND SURVEYOR, S-1266
Title

History of original corner establishment:

Fred Holden visited this corner in February, 1901, and set a stone at the corner.

Description of corner evidence found:

Owen Ayres & Asso. had searched for this corner and had not found it in September, 1977. Harry Nelson, a lifelong resident of the area, told us in January, 1978, he had seen the stone near the fence and South of the lane at this corner location, however, it had disappeared some time ago. We searched for the stone in and about that same area, however, we did not locate it. We re-established the corner by extending the line North and doubling the distance between an existing railroad spike at the SW corner of Sec. 1 and an existing stone, set by Holden in February, 1901, at the W1/16SW, Sec. 1.



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

Lawrence A. Feddersen

Douglas J. Malliet

Steve Towne

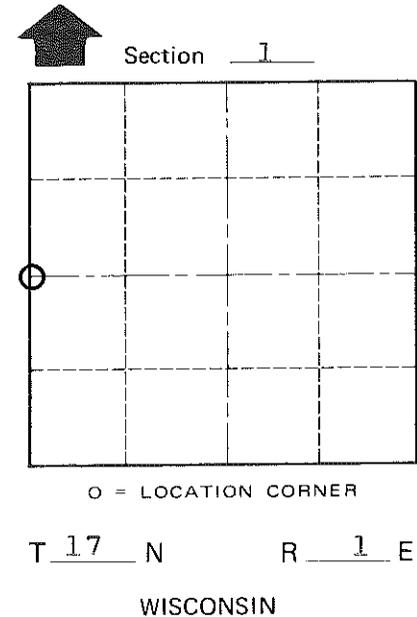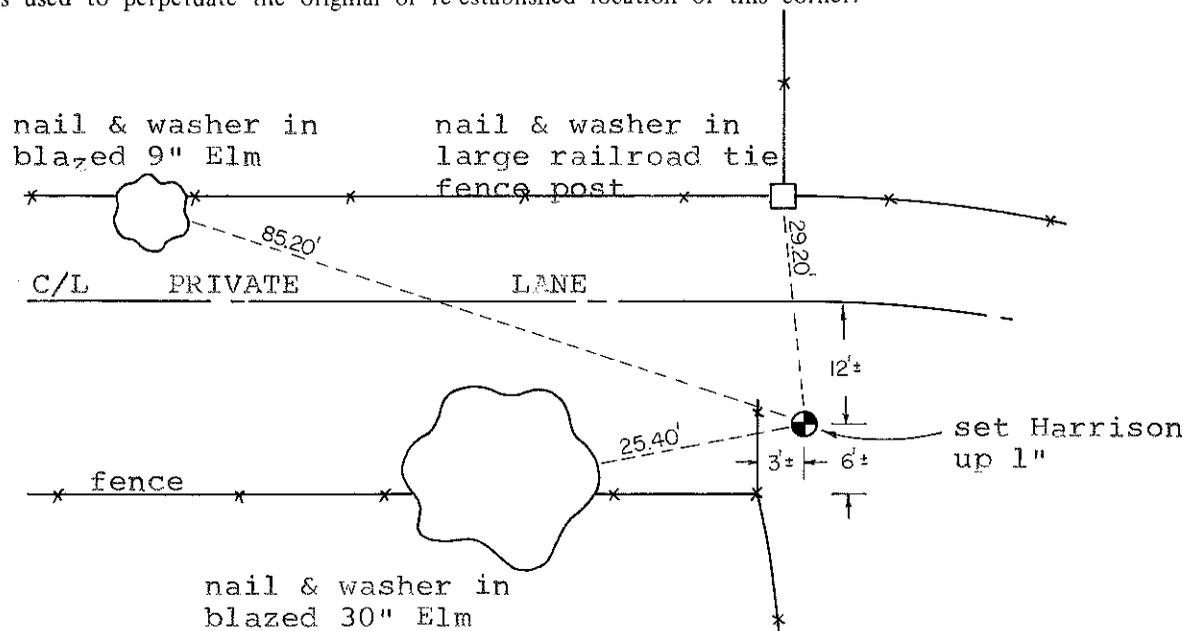

COUNTY SURVEYOR FORM NO. 1

SURVEY CONTROL ORDER

Horizontal _____

Vertical _____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town of OAKDALE

County of MONROE