

18

U.S. PUBLIC LAND CORNER MAINTENANCE

Corner ID : W1/4 Sec.2, T17N-R1E

41701032000


DATE	CREW	MONUMENT TYPE -----
April 30, 2014	Zachariah P.Dechant Gary L. Dechant	Existing Axle shaft centerline of Grotto Ave on line with fence to the north

References:

	<u>Bearing</u>	<u>Distance</u>
1) Set 3/4"x24" hex iron bar in pasture, down 8"	N14E	47.66'
2) Set 3/4"x24" hex iron bar in pasture centerline field entrance, down 12"	S20E	35.31'
3) Set 3/4"x24" hex iron bar in lawn, down 8"	S14W	32.58'
4) Set 3/4"x24" hex iron bar , down 8"	N20W	49.42'

COORDINATES:

NOTE: Reference and Harrison
set on straight lines

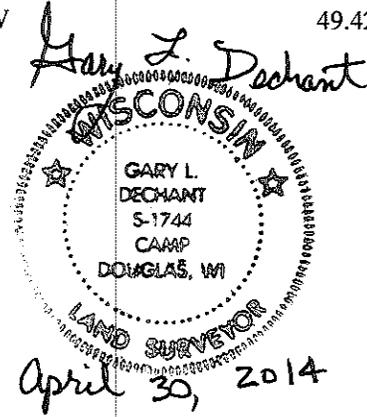

I, William C. Jung, do hereby certify that on the 21st day of May 19 80, I found (evidence) ~~no evidence~~ of the West 1/4 corner of section 2, T 17 N, R 1 E Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 30th day of Dec. 19 80.

William C. Jung - R.L.S. 1323

William C. Jung
Title

Approved: HARLEY A. SIME
MONROE CO. SURVEYOR

History of corner establishment since Original Government Survey

Fred Holden was at this corner in February of 1901. Gary Sime set a P.K. nail at this corner in May of 1974.

Description of corner evidence found:

Accepted this traverse point as the best evidence of the corner; this position fits the overall section data very well. Set a Harrison marker. I had little luck in the section while looking for Holden's monuments and accessories.

UPDATE: The County Surveyor's Office was contacted and informed that a grinding repaving project was to take place on the Town Road shown below. The existing Harrison was removed. Following the work, a new monument was set and new ties taken.

B.H.M.
BHM 1/14/99



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:


W. Jung

C. Dade

S. Sowers

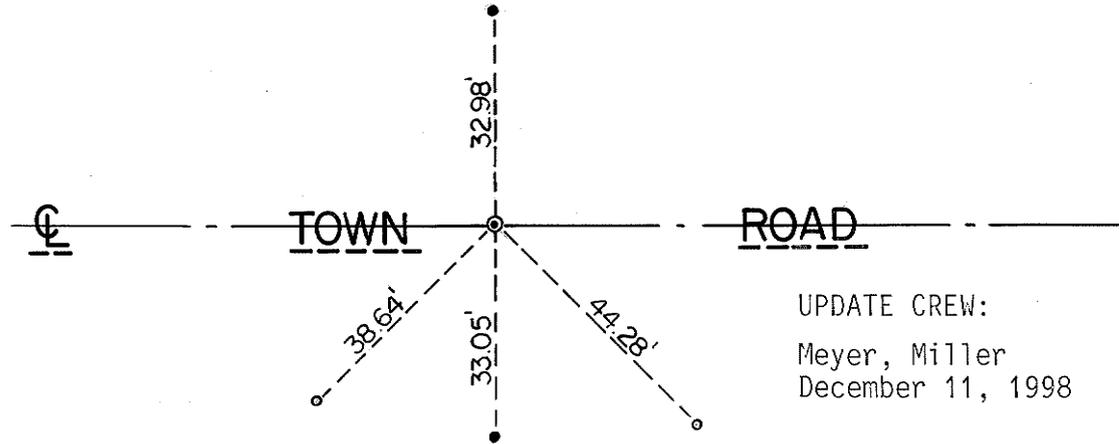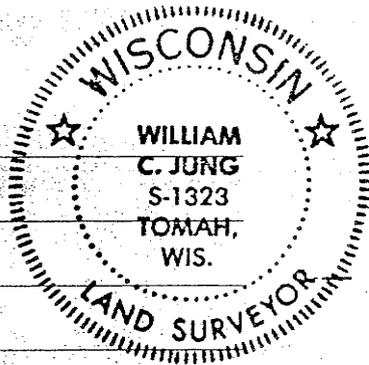

UPDATE CREW:
Meyer, Miller
December 11, 1998

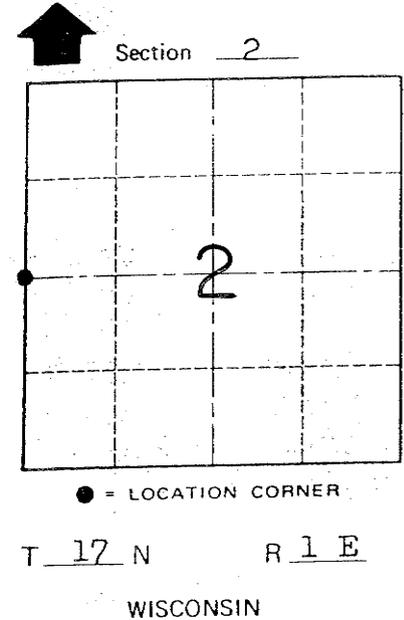

- = Set 1 1/2" x 26" axle shaft, down 2"± in new pavement
- = Existing 3/4" round iron bar
- = Set 3/4" x 24" round iron bar

Approved: HARLEY A. SIME
MONROE CO. SURVEYOR

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~City, Village or~~ Town of Oakdale
County of Monroe
Wisconsin

COUNTY SURVEYOR FORM NO. 1