

417 01090020

I, Bryan H. Meyer, do hereby certify that on the 5<sup>th</sup> day of January 19 84, I found (evidence) ~~removed~~ of the North 1/4 corner of Section 16, T 17 N, R 1 E Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

History of corner establishment since Original Government Survey


Donald Mulock was here in September of 1967 and found a 1"x2" iron bar. A crew from H. A. Sime and Associates was here in April of 1975 and found the bar. Larry Fedderson was here in 1977 and in August of 1978 and used the same 1"x2" bar.

Description of corner evidence found:

I found a 1"x2"x13" iron bar (looks as if it could be a locking pin) at a bend in a fence. I accepted this bar as the corner.

Dated this 5<sup>th</sup> day of Jan. 19 84.

Bryan H. Meyer  
Deputy County Surveyor  
Title

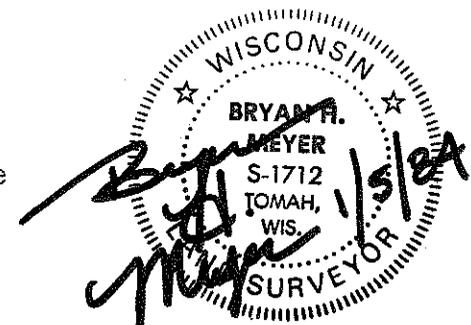



COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Crew: Meyer, Perrigo  
Date: January 5, 1984 - 12:00 P.M.  
Weather: P. Cloudy, Windy, 35°±  
Witnesses to corner location:

Bryan H. Meyer  
Dennis Perrigo

APPROVED: Harley A. Sime  
Monroe County Surveyor

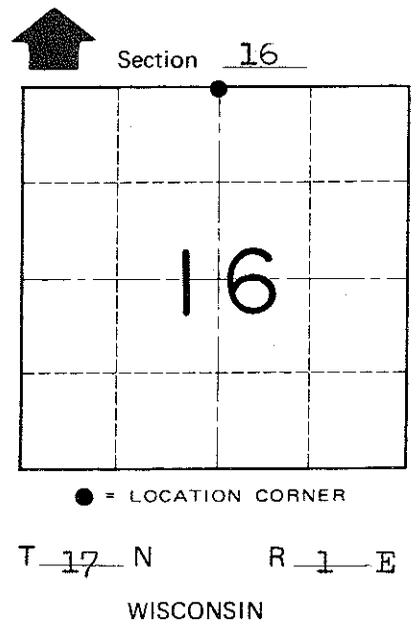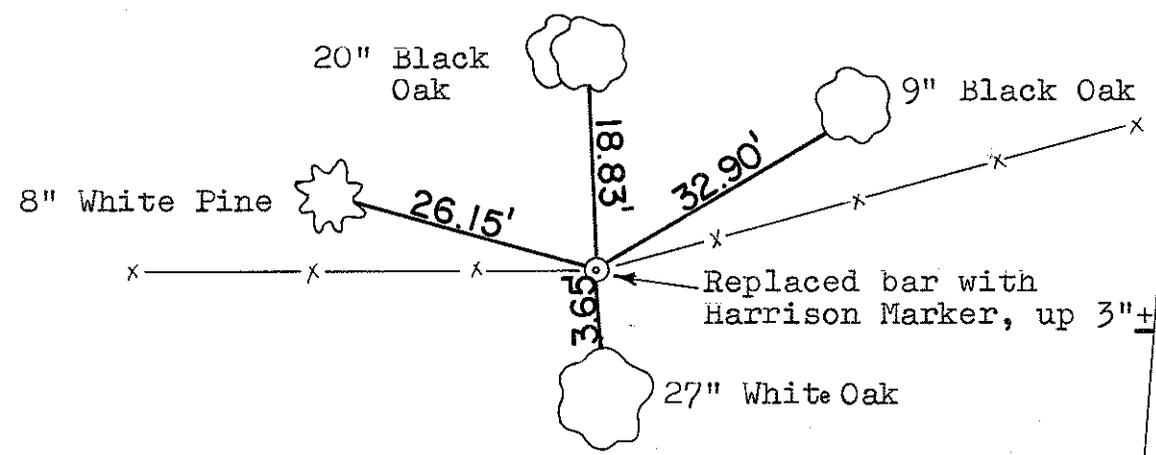

The distances shown are to nails set in the sides of the trees; the trees are not otherwise marked.

SURVEY CONTROL ORDER table with columns for Horizontal and Vertical measurements.

WISCONSIN COORDINATE SYSTEM table with columns for Corner, Control Sta. Name, East (X), North (Y), Elevation (Z), and Zone.

~~Monroe~~ Town of Oakdale  
County of Monroe