

417 011 10020

I, Bryan H. Meyer, do hereby certify that on the 22nd day of September 1983, I found (evidence) ~~XXXXXXXXXX~~ of the North 1/4 corner of Section 14, T 17 N, R 1 E Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.


Dated this 22nd day of Dec. 1983.  
Bryan H. Meyer  
 Deputy County Surveyor  
Title

History of corner establishment since Original Government Survey

Henry Schroeder was here in November of 1891. Fred Holden was here in February of 1901 and set an iron bar.

Description of corner evidence found:

Found a 1 1/2"x20 1/2" round iron bar, with a 2"x2"x4" square head on top. It would appear this was either a locking pin or a weight. Also found a bolt 3"± West of the bar. Prior to digging we found 3 looped pieces of wire over the corner.

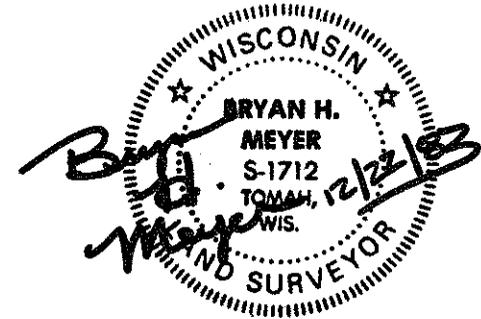

COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Crew: Meyer, Wilhite  
 Date: September 22, 1983  
 Weather: P. Cloudy, Windy, 45°±.

Witnesses to corner location:



Bryan H. Meyer  
Dallas Wilhite

APPROVED: Harley A. Sime  
 Monroe County Surveyor

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

The 6" and 20" Oaks are double blazed; each distance shown is to a nail in a hack in the side of the tree.

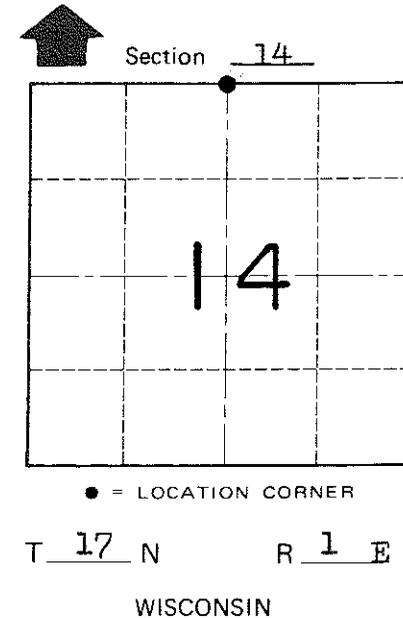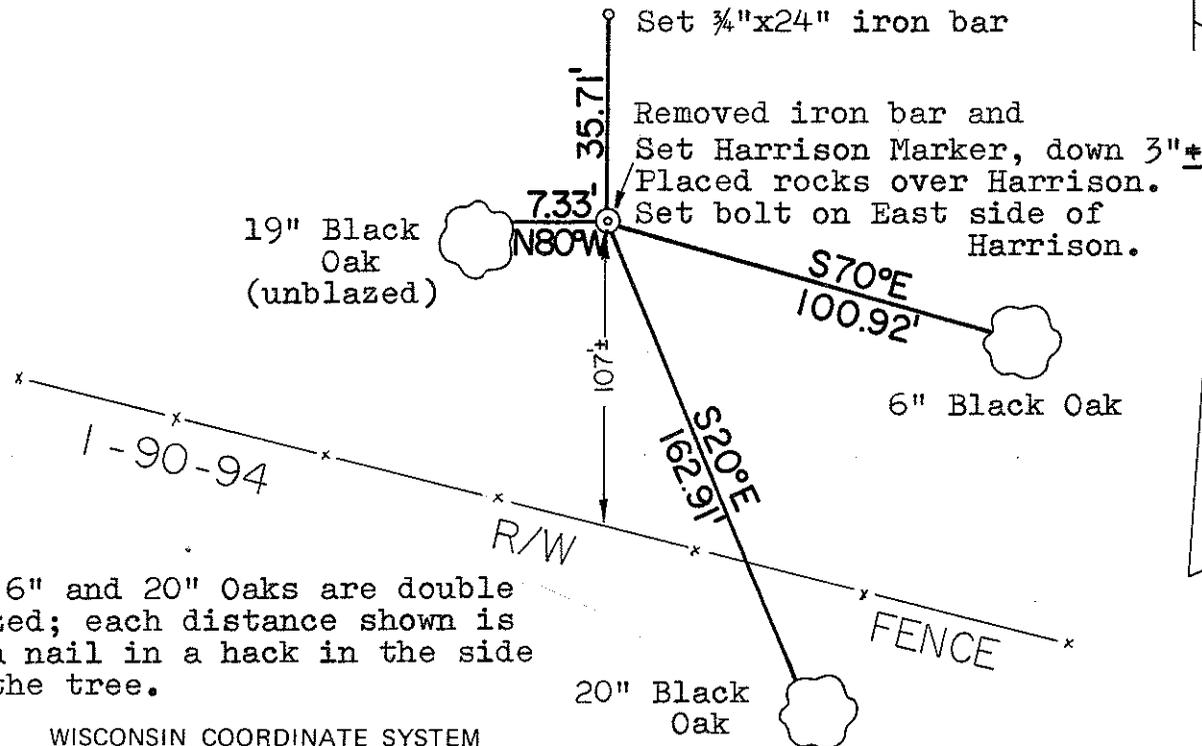

WISCONSIN COORDINATE SYSTEM				
Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~Village~~ Town of Oakdale  
 County of Monroe