

# 65

# U.S. PUBLIC LAND CORNER MAINTENANCE

Corner ID : SE Sec.15, T17N-R1E

41701150000


<u>DATE</u>	<u>CREW</u>	<u>MONUMENT TYPE</u> -----
April 23, 2014	Zachariah P.Dechant Gary L. Dechant	Ex. Harrison Monument , top broke off, down 10" 8' west traveled centerline Grover Road

References:

	<u>Bearing</u>	<u>Distance</u>
1) Set 3/4"x24" hexagon iron bar, down 16" in field	N61E	51.27'
2) Set 3/4"x24" hexagon iron bar, down 16", in field	S72E	51.03'
3) Set 3/4"x24" hex iron bar, down 16", in field	S61W	40.49'
4) Set 3/4"x24" hex iron bar, down 16" in field	N72W	40.09'

**COORDINATES:**

**NOTE:** Reference markers and Harrison  
set on straight lines

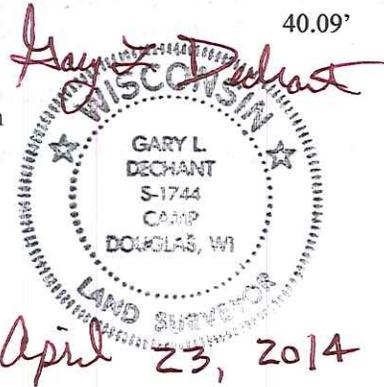

417 01150000

I, Harley A. Sime, do hereby certify that on the 18th day of March 1980, I found ~~(evidence)~~ (no evidence) of the NW corner of Section 23, T 17 N, R 1 E, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 8th day of April 1980.

Harley A. Sime, R.L.S. 355

County Surveyor  
Title

History of original corner establishment:

Fred Holden was here in March of 1901.

Description of corner evidence found:

After surveying out Section 23 and part of Section 22 and finding no evidence of the NW corner of Section 23, it was set by double proportionate measure. It fit other existing corners reasonably well. Mr. Charles Beller, a old farmer living in the immediate area, said that where we set the corner was very close to where the fence lines use to meet on both sides of the road. The N $\frac{1}{4}$  corner Sec. 22, E $\frac{1}{4}$  corner Sec. 15, N $\frac{1}{4}$  corner Sec. 23, and the SW corner Sec. 23 were used to relocate the NW corner of Section 23 by double proportionate measurement.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

G. Dechant

C. Pietz

T. Tormoen



COUNTY SURVEYOR FORM NO. 1

Power Pole  
w/N&C

Set Flint  $\square$  16.47'  
Rock (Put iron  
scraps under rock)

Set Harrison  
in road,  
7'+ West of  
centerline  
of road

Oak Sapling

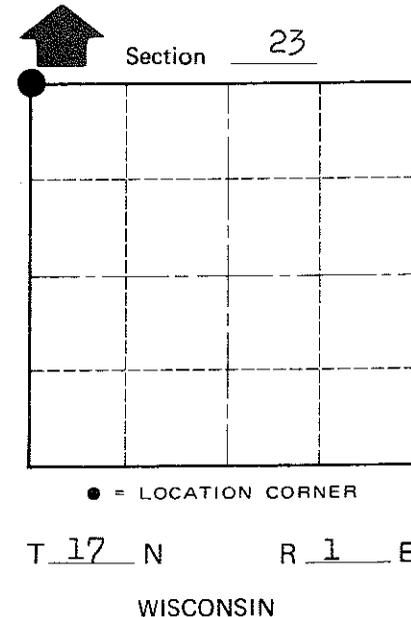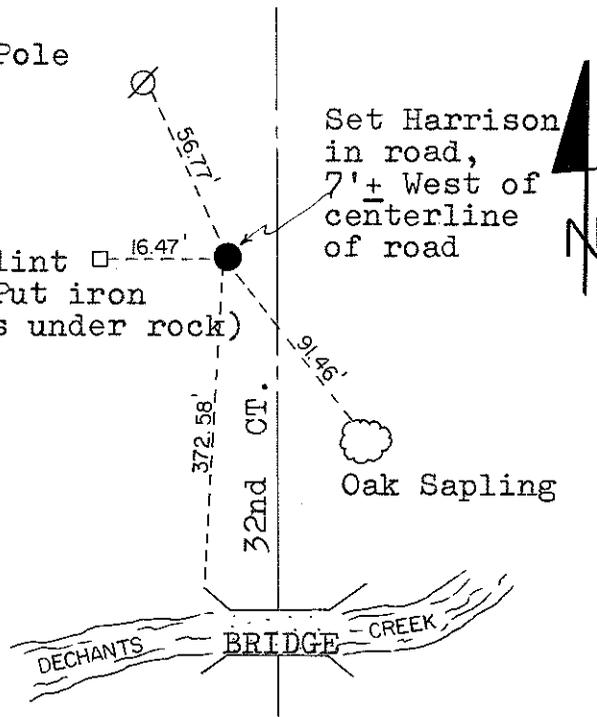

**Approved: HARLEY A. SIME  
MONROE CO. SURVEYOR**

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~City, Village or~~ Town Oakdale  
County of Monroe