

CERTIFICATE

CERTIFIED LAND CORNER

No. 67

417 01160000

I, Harley Sime, do hereby certify that on the 5 th day of April 1975, I found ~~(evidence)~~ (no evidence) of the SE corner of Section 16, T 17 N, R 1 E., Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 10 th day of April 1975.

COUNTY SURVEYOR

Title

History of original corner establishment:

In March of 1902 Fred Holden (County Surveyor) set an iron at this corner site, using a JO (Jack Oak) and a WO (White Oak) as witness trees.

Description of corner evidence found:

The corner iron was not found and due to extensive logging in the area neither were the witness trees. Therefore the corner was set in an existing occupation line ( as witnessed by Paul Muehlenkamp 4/5/75), and at the approximate distance from the E $\frac{1}{4}$  corner as is the NE corner of the same Section.

Approved: **HARLEY A. SIME**  
**MONROE CO. SURVEYOR**

COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:



Set a standard Harrison monument up 3" in the woods, with accessories as shown below:

Witnesses to corner location:

Larry Feddersen - Survey Crew Chief

Kim H. Pritzlaff

Paul Muehlenkamp (property owner)

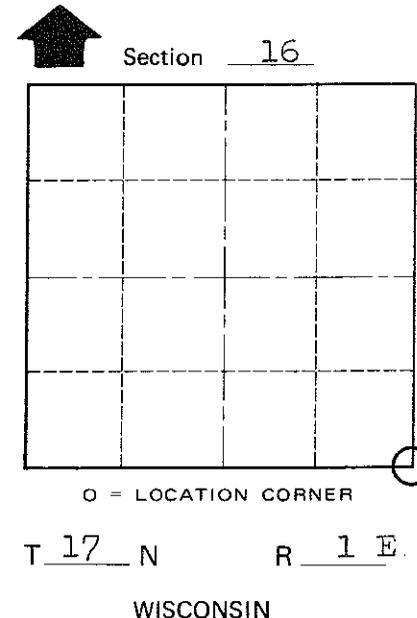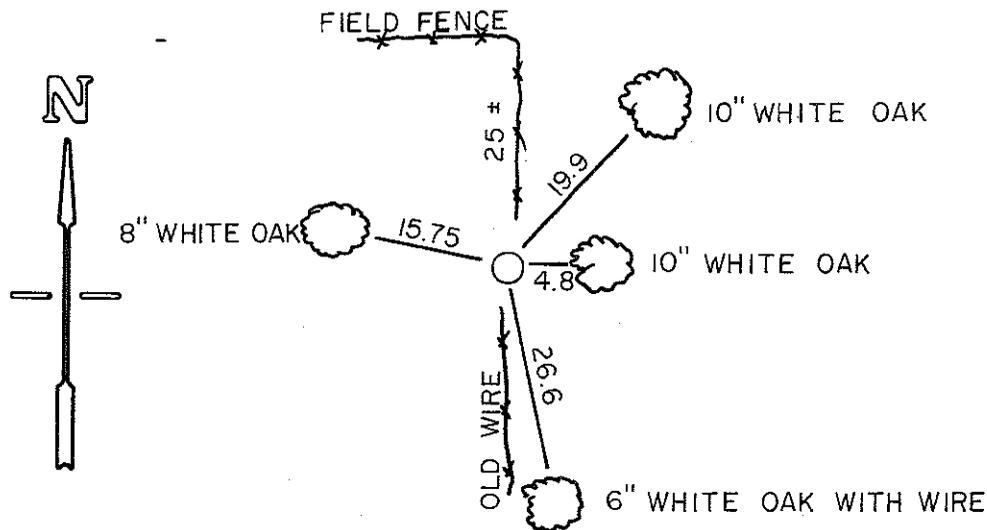

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town Oakdale

County of Monroe