

56

**U.S. PUBLIC LAND CORNER
MAINTENANCE**

Corner ID : E1/4 Sec.17, T17N-R1E

417011720000

<u>DATE</u>	<u>CREW</u>	<u>MONUMENT TYPE -----</u>
October 3, 2014	Zachariah P.Dechant Gary L. Dechant	Found Harrison Monument on line with fence to the south. Placed concrete around Harrison. Feddersen's BT to the south is gone.

References:

	<u>Bearing</u>	<u>Distance</u>
1) Set 3/4"x24" square iron bar, down 6",	N78E	30.92'
2) Set 3/4"x24" square iron bar, down 6", 2' north of east-west fence	S60E	32.32'
3) Set 3/4"x24" square iron bar, down 6"	S70W	24.91
4) Set 3/4"x24" square iron bar, down 6" on top of bank	N16W	24.25'

Gary L. Dechant

October 3, 2014

I, Harley A. Sime, do hereby certify that on the 10th day of April 1975, I found (evidence) (~~no evidence~~) of the W 1/4 corner of Section 16, T 17 N, R 1 E, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 1st day of Feb. 1978.

Harley A. Sime
County Surveyor
Title

History of original corner establishment:

Description of corner evidence found:

Set this corner using existing field evidence as best available. (fence and brush line intersections)

See Reverse Side For Maintenance



Approved: **HARLEY A. SIME**
MONROE CO. SURVEYOR

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

L. Fedderson

K. Pritzlaff

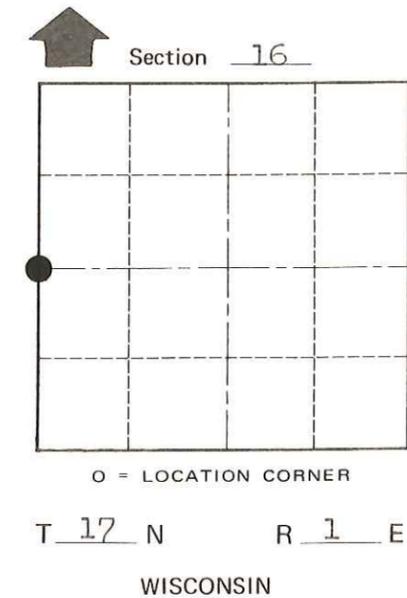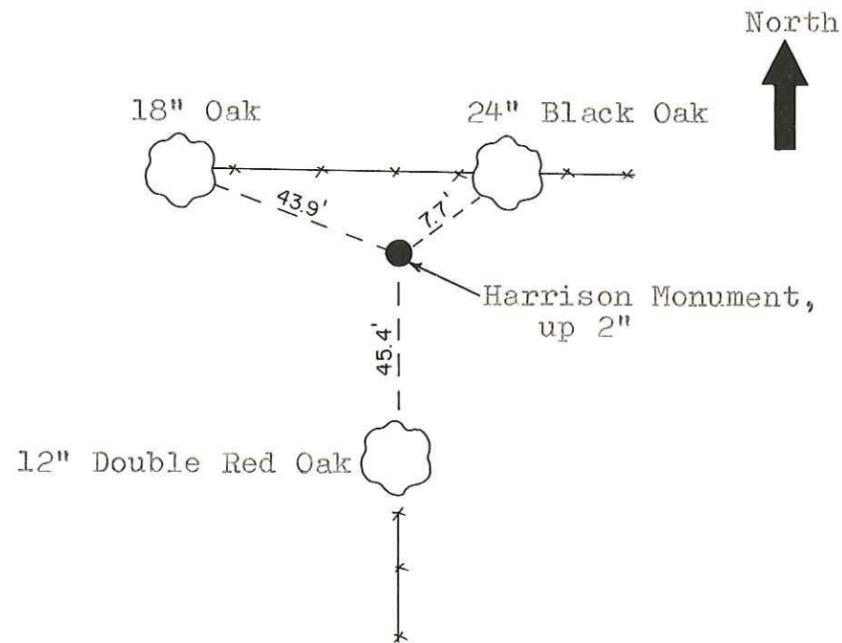

COUNTY SURVEYOR FORM NO. 1

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town Oakdale

County of Monroe