

# 90

**U.S. PUBLIC LAND CORNER  
MAINTENANCE**

**Corner ID : S1/4 Sec. 20, T17N-R1E  
41701200020**

<u>DATE</u>	<u>CREW</u>	<u>MONUMENT TYPE</u> -----
December 6, 2015	Zachariah P.Dechant Gary L. Dechant	Existing Harrison intact, in east-west fence

References:

	<u>Bearing</u>	<u>Distance</u>
1) Set 3/4"x24" iron bar, down 6", west side of 12"x12" stone	N33E	24.48'
2) Set 3/4"x24" iron bar, down 6", 3' South of 16" White Pine	SE	12.21'
3) Set 3/4"x24" iron bar, down 6", 4' NW of 5" White Pine	S86W	14.60'
4) Set 3/4"x24" iron bar, down 6", 9' SE of 16" Ash	N60W	22.31'



I, Bryan H. Meyer, do hereby certify that on the 15th day of August 19 91, I found (evidence) ~~no evidence~~ of the South 1/4 corner of Section 20, T 17 N, R 1 E Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 22nd day of Aug. 19 91.

Bryan H. Meyer  
Deputy County Surveyor  
Title

History of corner establishment since Original Government Survey

Nothing recorded.

See Reverse Side For Maintenance

Description of corner evidence found:

I found two large brace posts at the end of fencelines from the East and West. I accepted a point between these two brace posts as the best available evidence. This point fits a straight line between the Southwest and Southeast corners of Section 20 within five minutes. The distance to the Southeast corner of Section 20 is short by over 60 feet when compared to the original notes. I believe this represents a dropped chain (66') in the Original Government Survey. The distance from this corner to the Southwest corner fits the Original Notes within 2.1 feet.



H. A. Sime and Associates  
P. O. Box 705  
Tomah, Wisconsin 54660  
Phone: (608)-372-5392


COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Crew: Meyer, Kenworthy  
Date: August 15, 1991 - 10:30 A.M.  
Weather: Sunny, Humid, 85°±  
Witnesses to corner location:


John Kenworthy

Bryan H. Meyer

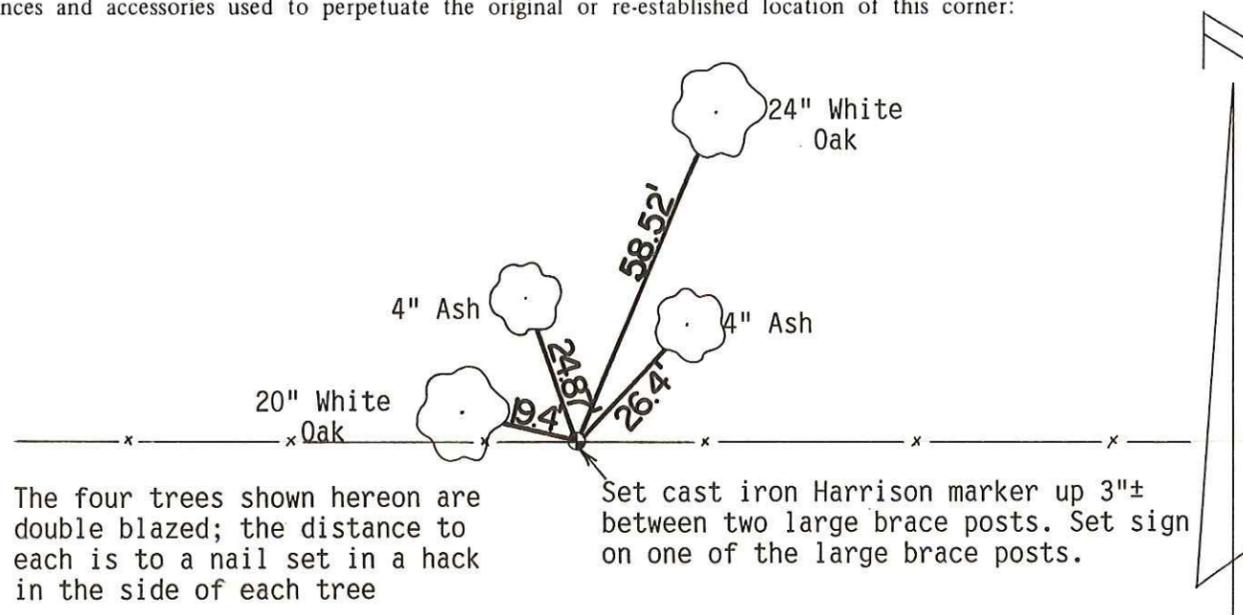

The four trees shown hereon are double blazed; the distance to each is to a nail set in a hack in the side of each tree

Set cast iron Harrison marker up 3\"/>

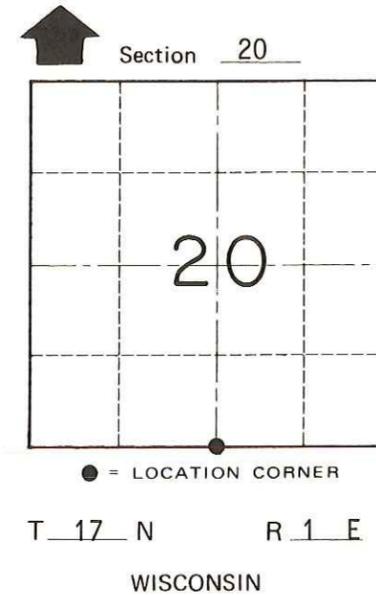

SURVEY CONTROL ORDER

Horizontal \_\_\_\_\_  
Vertical \_\_\_\_\_

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~City, Village or~~ Town of Oakdale  
County of Monroe