

JUNEAU COUNTY SURVEY MONUMENT RECORD

CORNER NO. 74
SECTION 19
TOWN 17 N.
RANGE 2 E.

TYPE OF MONUMENT: STANDARD HARRISON MONUMENT


JUNEAU COUNTY COORDINATES NAD 83/91
NORTHING: 205,769.50
EASTING: 400,733.56

■ = CORNER MONUMENT RESTORED

BASIS FOR MONUMENT LOCATION
(USE REVERSE SIDE IF NECESSARY)

SHOW INFO SUCH AS: HISTORY OF CORNER, WITH REFERENCE TO VOLUME AND PAGE DATES, SURVEYOR; EXACT DESCRIPTION OF MONUMENT PLACED OR FOUND, IF LOCATION COMPUTED, BY TAPED OR EDM TRAVERSE; LANDOWNER REMARKS, ETC.


STANDARD HARRISON MONUMENT FOUND AS PER TIE SHEET DATED 3/10/1978 BY DOUGLAS MALLIET.

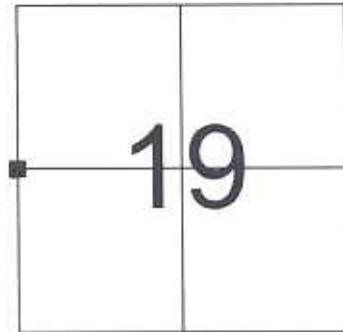

LOCATION

LEGEND

- = STANDARD HARRISON MONUMENT FOUND
- = 3/4" X 24" IRON ROD SET
- λ = GOVERNMENT SIGN SET
- TREE TIES ARE FOUND RAILROAD SPIKES

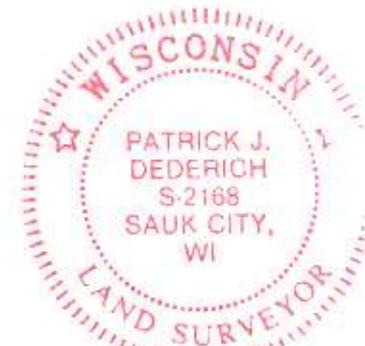


CERTIFIED CORRECT

Patrick J. Dederich
REGISTERED LAND SURVEYOR

DATE 8/18/2008

TIE SKETCH
(SHOW AT LEAST FOUR TIES)

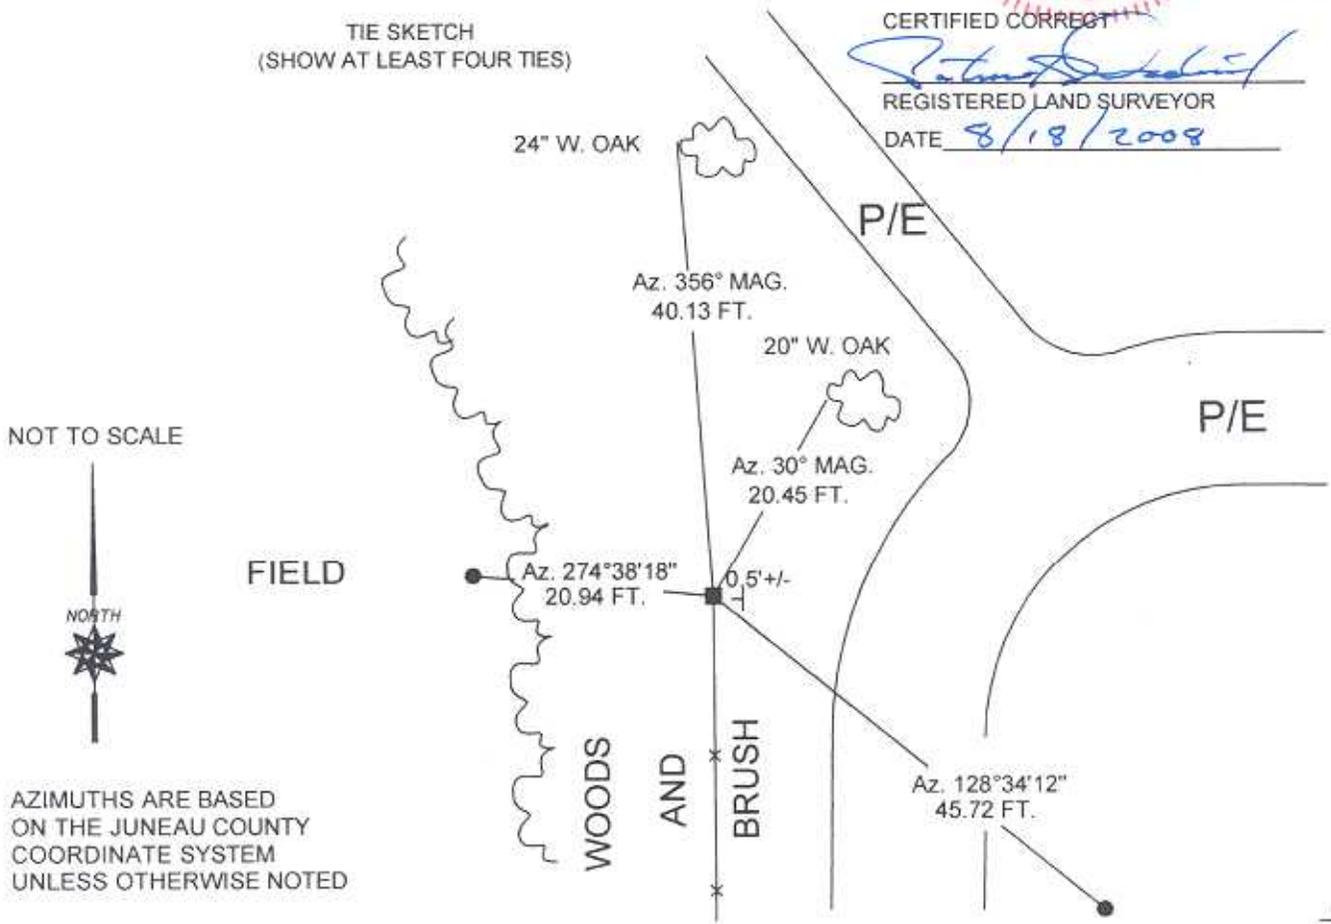

NOT TO SCALE



AZIMUTHS ARE BASED ON THE JUNEAU COUNTY COORDINATE SYSTEM UNLESS OTHERWISE NOTED

CERTIFICATE

CERTIFIED LAND CORNER

No. 80

417 01242000


I, Douglas J. Malliet, do hereby certify that on the 1 day of December 19 77, I found ~~(evidence)~~ (no evidence) of the E $\frac{1}{2}$ corner of Section 24, T 17 N, R 1 E, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

History of original corner establishment:

No subsequent history of perpetuation since the original U.S. Government Survey.

Dated this 10 day of March 1978.

Douglas J. Malliet
REGISTERED LAND SURVEYOR
Title

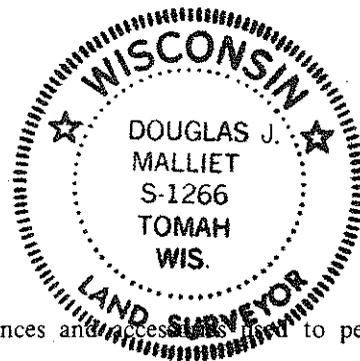



Description of corner evidence found:

Found an aluminum Berntsen monument at the NE corner of Sec. 24-17-1E, set by L.H. Mosher of Owen Ayres & Assoc. for the State of Wisconsin, in September, 1977. Also found a 3/4" round iron bar set by D.A. Marten at the SE corner of Sec. 24-17-1E. Remains of an ancient fence were found on the ground surface leading North, South & East at the location of the E $\frac{1}{2}$ corner. The E $\frac{1}{2}$ corner was set half way and on a straight line between the NE & SE corners. This corner location matched well with existing conditions as shown below in the tie sketch.

Description of corner and witness monuments, references and accessories found to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

DOUGLAS J. MALLIET
LAWRENCE A. FEDDERSEN
MARK HEIDECHE

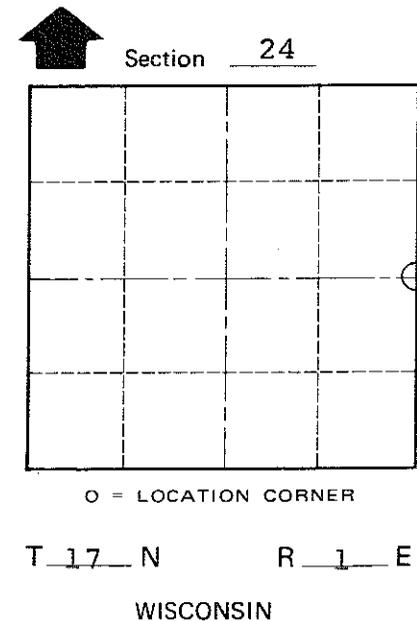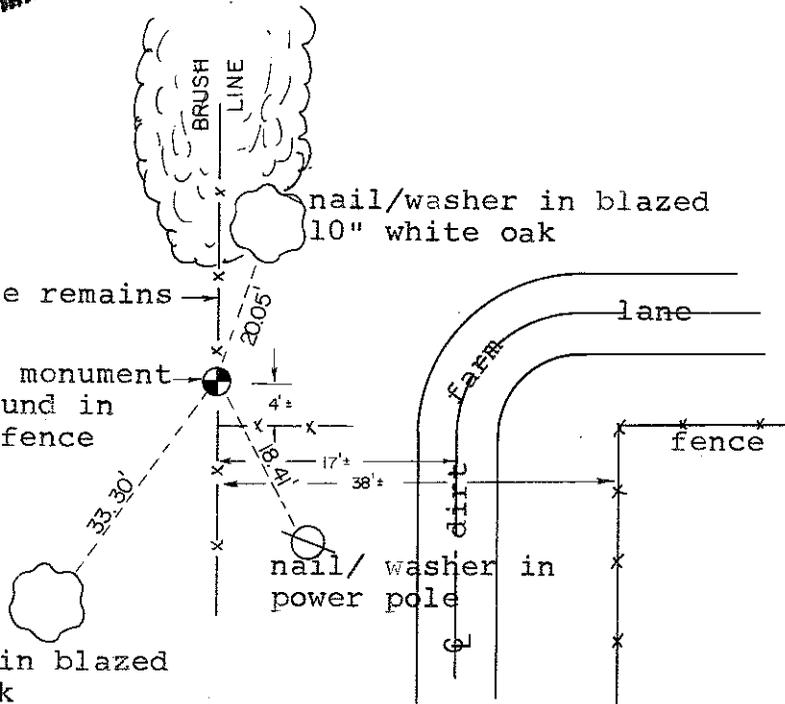

COUNTY SURVEYOR FORM NO. 1

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~City, Village or Town of~~ OAKDALE

County of MONROE