

111

**U.S. PUBLIC LAND CORNER
MAINTENANCE**


Corner ID : SE Sec.30, T17N-R1E

41701300000

<u>DATE</u>	<u>CREW</u>	<u>MONUMENT TYPE</u> -----
May 18, 2015	Zachariah P.Dechant Gary L. Dechant	Existing Harrison intact, on line with down fence to west, 15' north of newer fence going east

References:

	<u>Bearing</u>	<u>Distance</u>
1) Set 3/4"x24" round iron bar, down 6", 4' SW of 5" Maple	N43E	27.95'
2) Set 3/4"x24"hex iron bar, down 6", 5' east of 12" Maple	S32E	21.57'
3) Set 3/4"x24"hex iron bar, down 6", 4' west of 14" White Oak (BT)	S24W	15.70'
4) Set 3/4"x24" iron bar, down 6", 4' SE of 7" White Oak	N69W	19.94'

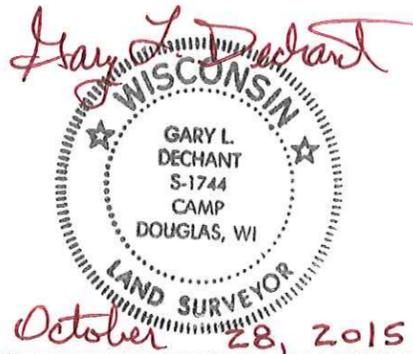

I, Garold A. Sime, do hereby certify that on the 14th day of October 19 75, I found (evidence) ~~(no evidence)~~ of the NW corner of Section 32, T 17 N, R 1 E, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 28th day of Feb. 19 78.

Garold A. Sime, R.L.S. 1261

Crew Chief, County Surveyor's
Title Office

History of original corner establishment:

A surveyor was at this corner in June of 1886.

Description of corner evidence found:

Accepted the fence corner as the best available evidence.





**See Reverse Side
For Maintenance**

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

G. Sime G. A. Sime

A. Lueck

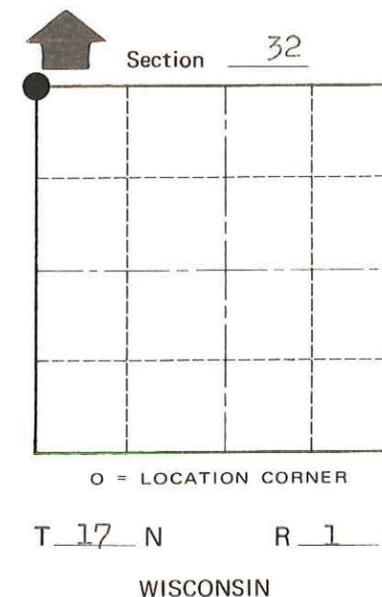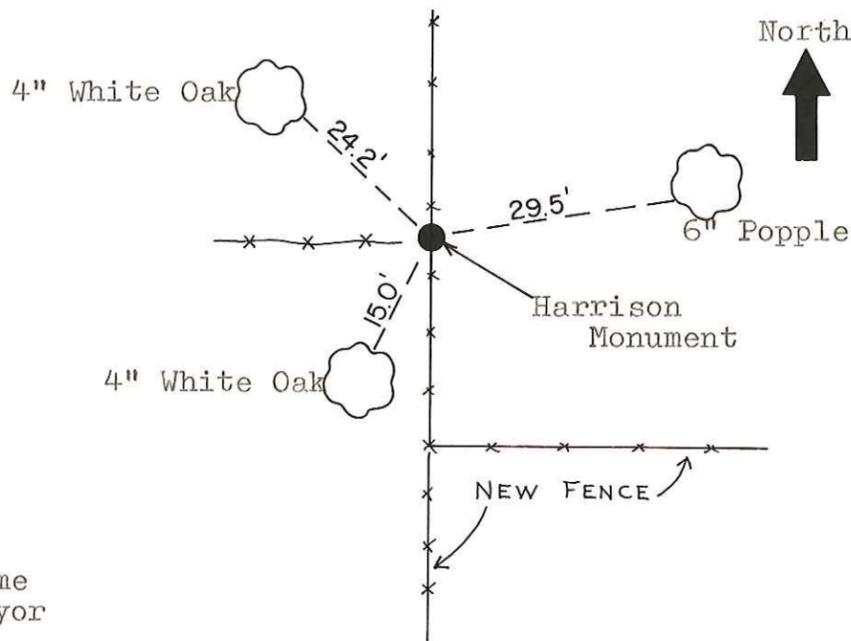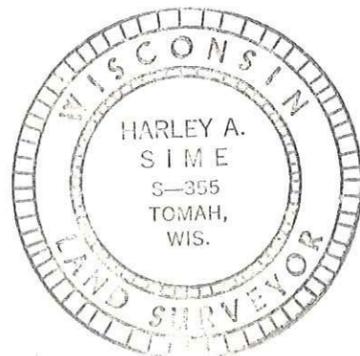

Approved by: Harley A. Sime
County Surveyor

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town Oakdale

County of Monroe

COUNTY SURVEYOR FORM NO. 1