

CERTIFICATE

CERTIFIED LAND CORNER

No. 63

41801140000

I, William C. Jung, do hereby certify that on the 1st day of April 1976, I found (evidence) (~~no evidence~~) of the NW corner of Section 24, T 18 N, R 1 E, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 6th day of Feb. 1978.

William C. Jung, R.L.S. 1323  
Crew Chief, County Surveyor's  
Title Office

History of original corner establishment:

Schroeder was at this corner in December of 1889.  
The old R.R. R/W map from 1910 shows this corner as being in the  $\oplus$  of the road and  $\oplus$  of the tracks.  
*awc 3/10/81*





Description of corner evidence found:

Found the iron pipe used by H. A. Sime in his certified survey map of January 23, 1963. This is the same point (intersection of road and tracks) that Kennedy mentioned in January 1937 notes.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

W. Jung  
D. Malliet

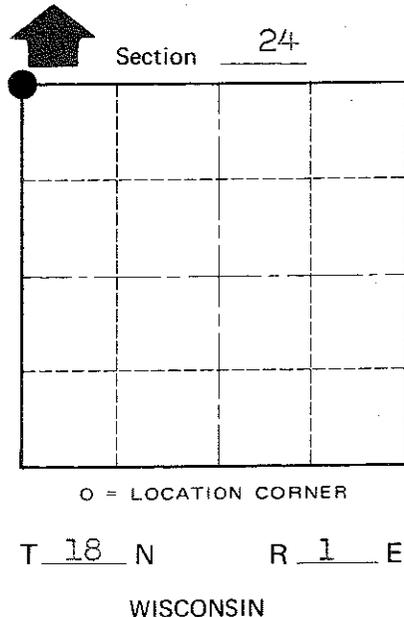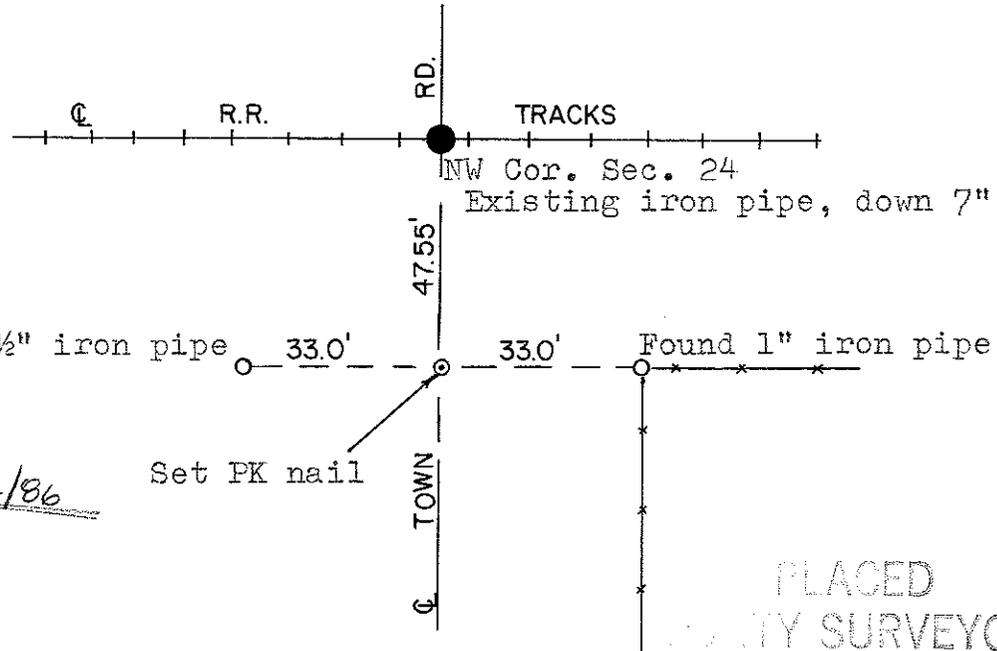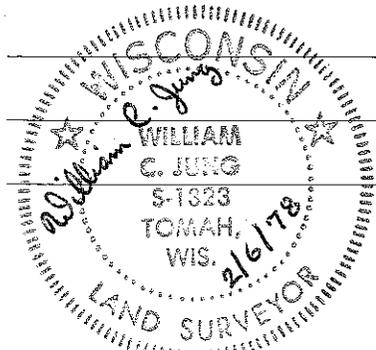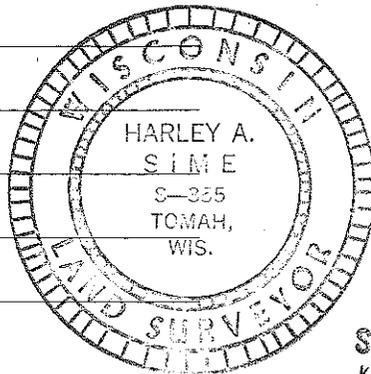

Approved: Harley A. Sime  
County Surveyor

PLACED  
COUNTY SURVEYOR'S  
SIGN Replaced 6-11-87

COUNTY SURVEYOR FORM NO. 1

SURVEY CONTROL ORDER

Horizontal \_\_\_\_\_  
Vertical \_\_\_\_\_

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town Byron

County of Monroe