

41801190000

I, Garold A. Sime, do hereby certify that on the 26th day of June 19 85, I found ~~(no evidence)~~ (no evidence) of the Southeast corner of Section 19, T 18 N, R 1 E Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

History of corner establishment since Original Government Survey

Mark Heidecke shows a computed location for this corner on his Certified Survey Map dated May 14, 1979. Kenyon was at this corner per unrecorded survey in 1883.

Description of corner evidence found:

Accepted Heidecke's computed location as the best available evidence.

Dated this 27th day of June 19 85.

Garold A. Sime
Deputy County Surveyor
Title



COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

Dallas Wilhite



James Lund

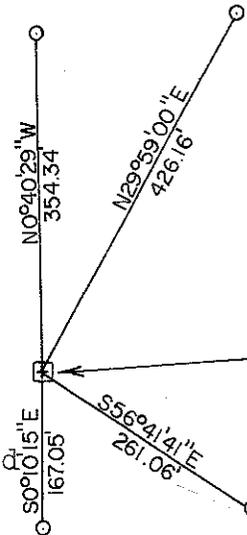

O = Set 3/4"x24" iron bar in the corner of cranberry bed

Actual corner falls in a cranberry bed, no monument set.

Bearings are referenced to ASSUMED NORTH.

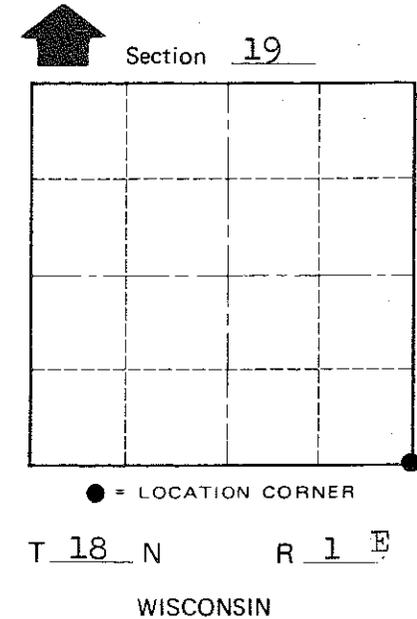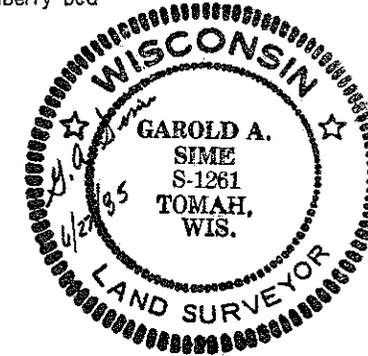

SURVEY CONTROL ORDER

Horizontal _____
Vertical _____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~XXXXX~~ Town of Byron
County of Monroe