CERTIFICATE

I, Harley A. Sime, do hereby certify that on the twentieth day of May 19 82, I found ~~evidence~~ (no evidence) of the North ¼ corner of Section 26, T 18 N, R 1 E Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 27th day of May 19 82.

Harley A. Sime - R. L. S. 355

County Surveyor, Monroe County

Approved: HARLEY A. SIME
MONROE CO. SURVEYOR

CERTIFIED LAND CORNER

No. 84

41801230020

History of corner establishment since Original Government Survey

Henry Schroeder was here in December of 1889.

WISCONSIN BRYAN H. MEYER S-1712 TOMAH LAND SURVEYOR

Description of corner evidence found:

Set on line and equidistant between the Northeast and Northwest corners of Section 26. The distances East and West to the Section cormers match the Original notes within 3'.

COUNTY SURVEYOR FORM NO.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

Bryan Meyer - Crew Chief

Gary Dechant

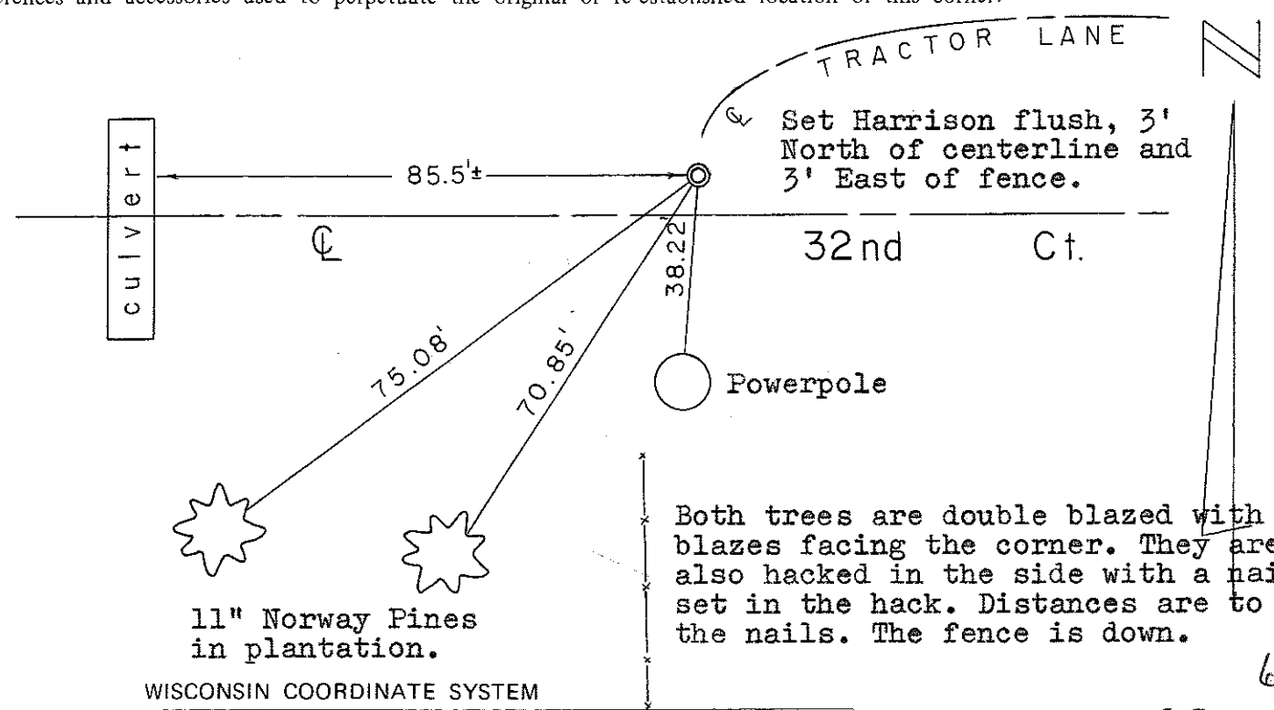

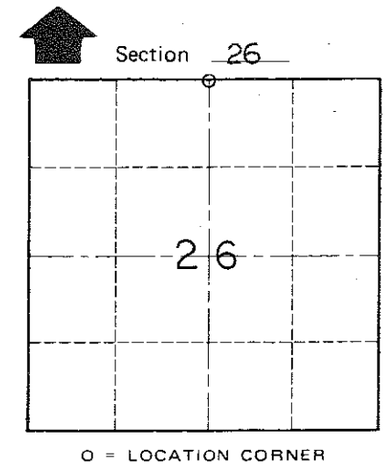

T 18 N R 1 E

WISCONSIN

PLACED COUNTY SURVEYOR'S SIGN 6-22-87

SURVEY CONTROL ORDER

Horizontal	
Vertical	

WISCONSIN COORDINATE SYSTEM

	East (X)	North (Y)	Elevation (Z)	Zone
Corner				
Control Sta. Name				

~~City, Village or~~ Town of Byron

County of Monroe