

41801270000



I, Bryan H. Meyer, do hereby certify that on the 25th day of March, 19 86, I found (evidence) ~~(evidence)~~ of the Northeast corner of Section 34, T 18 N, R 1 E Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 29th day of Dec., 1986.

Bryan H. Meyer

Deputy County Surveyor
Title

History of corner establishment since Original Government Survey

Duke Marten was here in April of 1974. Larry Feddersen was here in November of 1977. William Jung was here in May of 1980 and set a Harrison marker at the corner. (see page 1)

Description of corner evidence found:

George Baker (Monroe County Highway Commissioner) contacted the County Surveyors Office and informed us that he was planning to resurface C.T.H. "PP" and that the road alignment would change at this point. Three additional ties were taken in the fall of 1985. After completion of the road project, the Harrison and ties were found to be correct. (The Harrison did have the top broken off)



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Crew: Meyer, Wilhite
Date: March 25, 1986

Witnesses to corner location:

Dallas Wilhite

Bryan H. Meyer

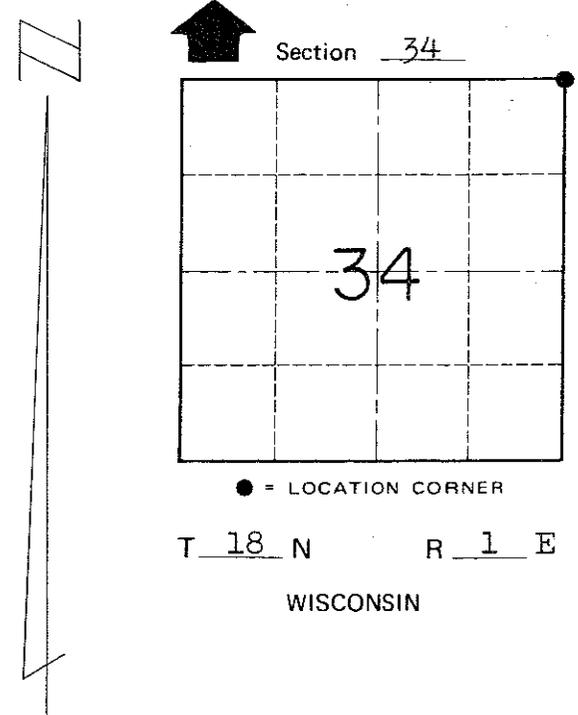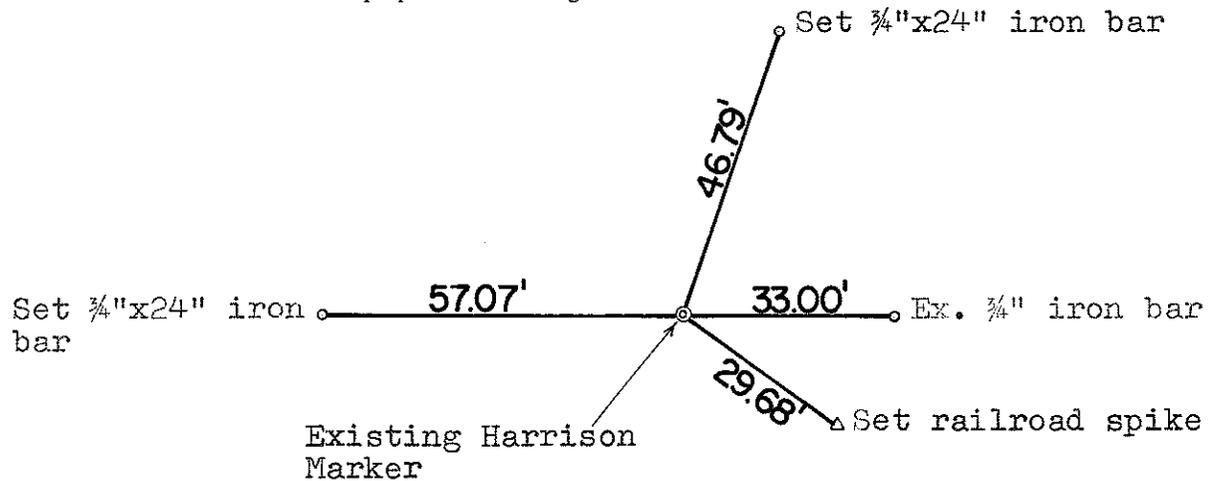

● = LOCATION CORNER
T 18 N R 1 E
WISCONSIN

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~City, Village or~~ Town of Byron

County of Monroe

COUNTY SURVEYOR FORM NO. 1

CERTIFICATE

CERTIFIED LAND CORNER

No. 105

Page 1

I, William C. Jung, do hereby certify that on the 21st day of May 1980, I found (evidence) (no evidence) of the NE corner of Section 34, T 18 N, R 1 E Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 20th day of Jan. 1981.

William C. Jung

William C. Jung, R.L.S. 1323

Title

History of corner establishment since Original Government Survey

No recorded history until Duane Marten set a Harrison at this corner on April 23, 1974. In November of 1977, Larry Feddersen found a king bolt located about 7'+ North and 2'+ West of Marten's Harrison. Feddersen's field evidence and measurements proved Marten's Harrison to be incorrect.




Description of corner evidence found:

Found an old hatchet, an old axe head, an old R.R. spike, an old chaining pin, an old iron bar, an old bushing, an old large iron pin, and a small stone, all of which are unrecorded. Removed all of the above evidence and moved D. Marten's Harrison to this point. All of the above objects were in one hole! Also removed an iron bar which was over the top of all of this. The last iron bar was L. Feddersen's reference iron. Accepted Feddersen's corner.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

W. Jung
S. Sowers
C. Dade

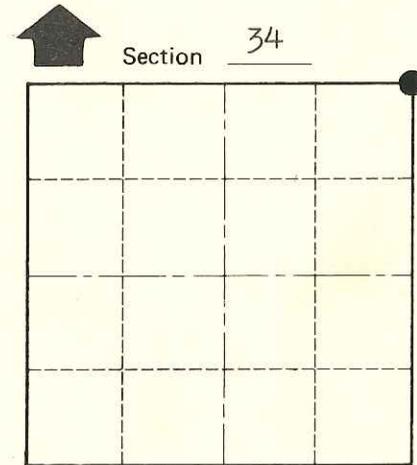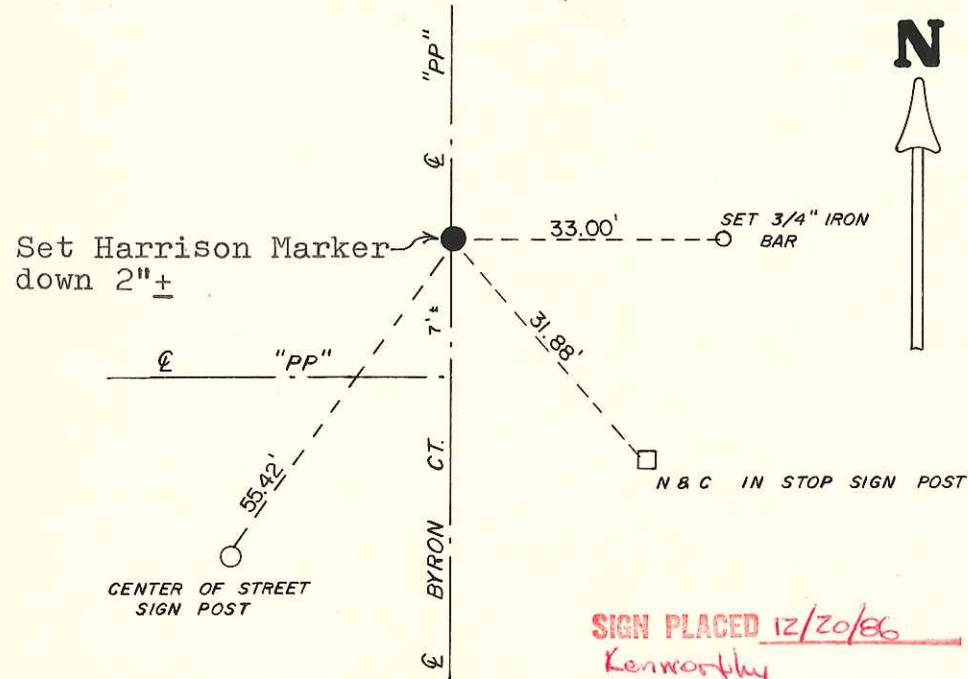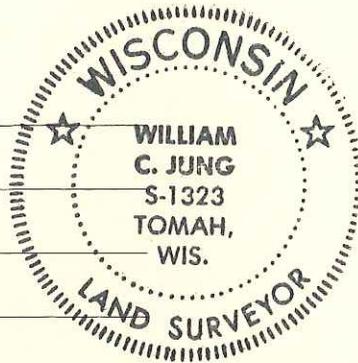

Section 34
T 18 N R 1 E
WISCONSIN

Approved: HARLEY A. SIME
MONROE CO. SURVEYOR

SURVEY CONTROL ORDER

Horizontal
Vertical

WISCONSIN COORDINATE SYSTEM

Table with columns: Corner, Control Sta. Name, East (X), North (Y), Elevation (Z), Zone

SIGN PLACED 12/20/86
Kenworthy

City, Village or Town Byron
County of Monroe

COUNTY SURVEYOR FORM NO. 1