

X21502042000

I, William C. Jung, do hereby certify that on the 15th day of July 1983, I found (evidence) ~~(no evidence)~~ of the West 1/4 corner of Section 3, T 15 N, R 2W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 5th day of Dec. 1983.

William C. Jung

Deputy County Surveyor, R.L.S. 1323

History of corner establishment since Original Government Survey

In an unrecorded survey apparently done by Fred Holden, Holden shows that an iron bar was set at the location of the original government corner. In March of 1879 A.B. Holden found the original government corner.

Description of corner evidence found:




I found a 1"x38" buggy axle (bar) about 14" to the West of the corner post at the occupied corner. I removed the buggy axle and replaced it with a Harrison marker. I found wire going to the West while digging. The corner is also just North of the fence. An elderly landowner, Mr. Erwin J. Vieth, owns land to the Southeast of the corner. He said that according to his father and grandfather, this was indeed the original government corner. Mr. Vieth could remember when his father "got in Dutch" for cutting down the old original bearing tree in the Southeast corner. The new fence corner post at the occupied corner replaced an older post according to Vieth.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

William C. Jung

Dallas Wilhite

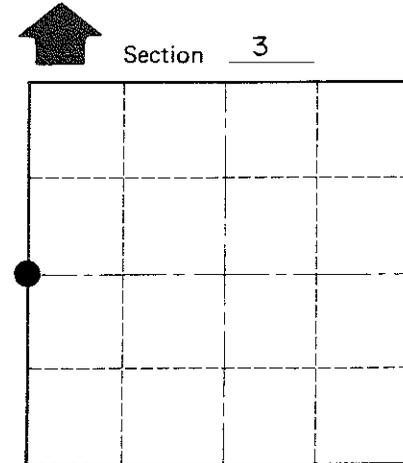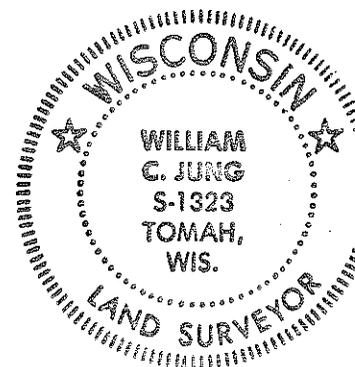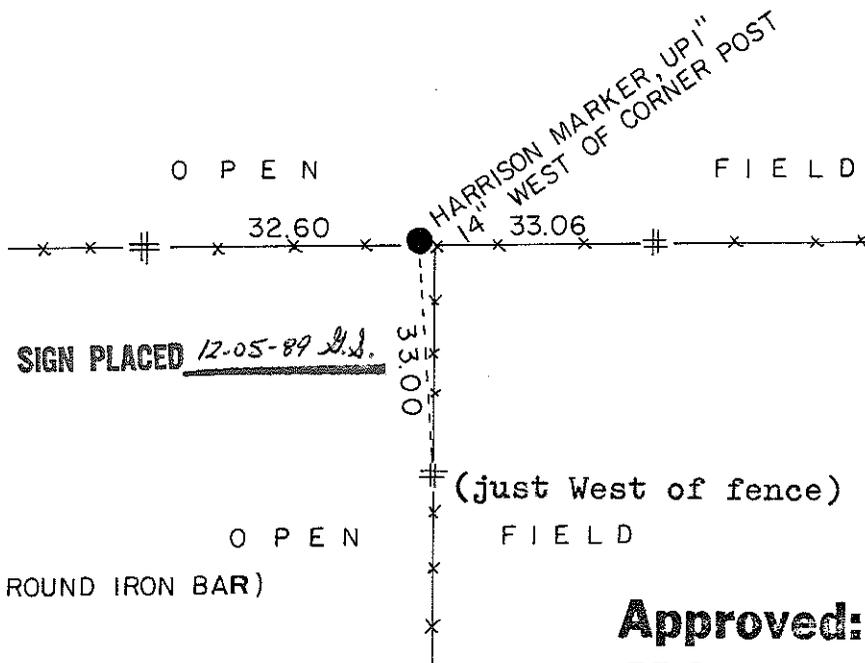

(# = SET 3/4"x 24" ROUND IRON BAR)

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

Approved: **HARLEY A. SIME**
MONROE CO. SURVEYOR

~~City, Village~~ or Town Sheldon
County of Monroe
Wisconsin

COUNTY SURVEYOR FORM NO. 1