

21502050000

I, Garold A. Sime, do hereby certify that on the 27th day of June 1991, I found (evidence) (~~XXXXXX~~) of the Southeast corner of Section 5, T15 N, R 2 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 28th day of June 1991.

Garold A. Sime

Monroe County Surveyor
Title

History of corner establishment since Original Government Survey

Fred Holden was at this corner in June & December of 1904 and set a stone. Frank Davy found Holdens stone in June of 1926.

Description of corner evidence found:

I found Holdens stone and replaced it with a Harrison Monument.

COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:


Set Cast Iron Harrison Monument at corner.
Set guard sign next to Harrison

Witnesses to corner location:


Garold A. Sime, R.L.S.

John F. Kenworthy

Brent Kostka



Set 1 1/4" x 24" iron pipe on west edge of gravel drive.


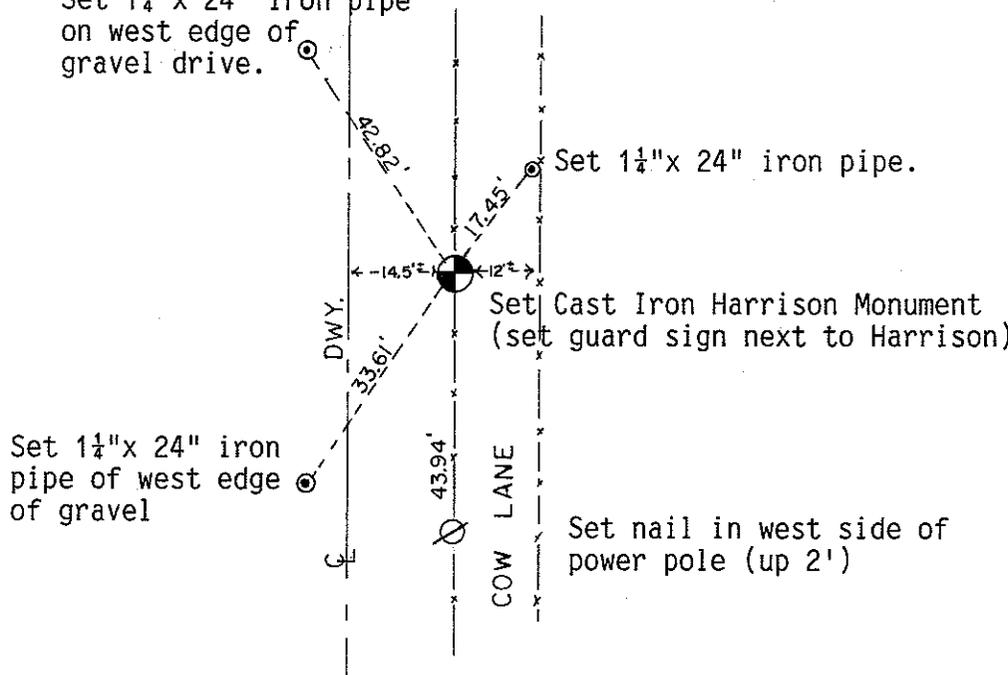


Set 1 1/4" x 24" iron pipe.

Set Cast Iron Harrison Monument (set guard sign next to Harrison)

Set 1 1/4" x 24" iron pipe of west edge of gravel

Set nail in west side of power pole (up 2')

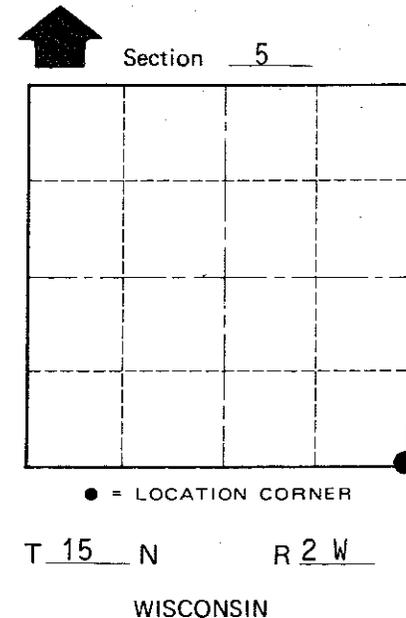

SURVEY CONTROL ORDER

Table with 2 rows: Horizontal, Vertical

WISCONSIN COORDINATE SYSTEM

Table with 5 columns: Corner, East (X), North (Y), Elevation (Z), Zone

~~City, Village or Town~~ of Sheldon
County of Monroe