

21502050020

I, Garold A. Sime, do hereby certify that on the 27th day of June 1991, I found (evidence) (~~no evidence~~) of the S 1/4 corner of Section 5, T 15 N, R 2 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 28th day of June 1991.

Garold A. Sime

Monroe County Surveyor  
Title

History of corner establishment since Original Government Survey

Fred Holden set an iron stake at this corner in his survey of June & December of 1904.  
Frank Davy set a stone at this corner in June of 1926.

Description of corner evidence found:

I could not locate Holden's iron stake nor Davy's Stone. I monumented this corner at the bearing and distance given by Davy from his Northwesterly bearing tree. This location fits the distance that he gives from the Southwest corner of the SE 1/4-SW 1/4 which I also found.

COUNTY SURVEYOR FORM NO. 1





Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Set Cast Iron Harrison Monument at corner.  
Set guard sign next to corner.

Witnesses to corner location:

Garold A. Sime, R.L.S.

John F. Kenworthy

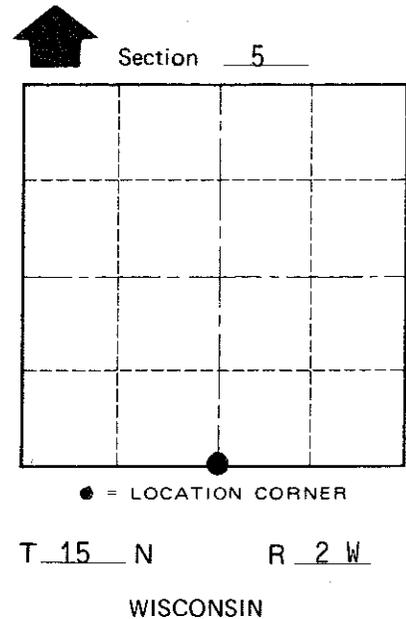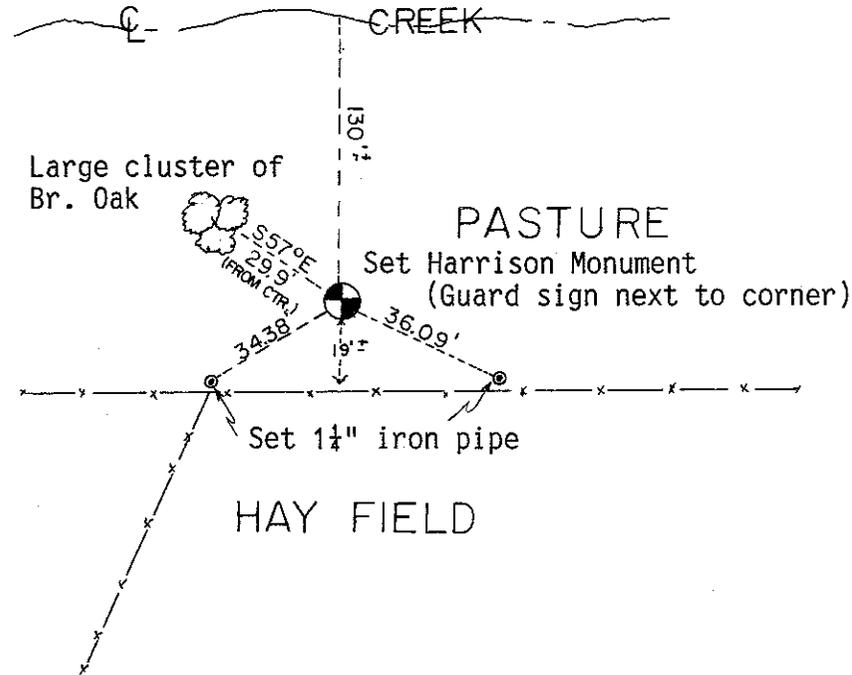

SURVEY CONTROL ORDER

Horizontal \_\_\_\_\_  
Vertical \_\_\_\_\_

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~City or Town~~ or Town of Sheldon

County of Monroe