COUNTY SURVEYOR FORM NO. 1

21502052000

CERTIFICA

I, _____ certify that on the _____ of _____ (evidence). (no evidence) of t corner of _____ R_____ Fourth Principal established said corner accord Statutes as shown and descril Dated this _____ day of

Title

Description of corner and wit

Witnesses to corner location:

SURVEY CONTROL ORDE

Horizontal

Vertical

Corner

Control Sta. Name

MONROE [redacted] COUNTY

Survey Monument Record

TYPE OF MONUMENT: No Monu. reset

STATE PLANE COORDINATES: N_____

E_____

ELEVATION — M.S.L. DATUM: _____

THETA ANGLE: _____

FIELD BOOK: _____ PAGE _____

CORNER NO. _____

SECTION 4

TOWN 15

RANGE 2W



LOCATION
(Indicated by 'X')

N

BASIS FOR MONUMENT LOCATION

(Use reverse side if necessary)

Show info such as: History of corner, with reference to Vol. and pg, dates, surveyor; exact description of monument replaced; if location computed, by taped or EDM traverse; landowner remarks, etc.

1¼" iron pipe set by previous surveying
plowed out by farming practices.
No new monument reset.
Accepted the existing fence corner as
the true location for this corner,
at previous surveying.

SEAL:

WISCONSIN
PATRICK A. CARROLL
S-1199
MAUSTON
WIS.
LAND SURVEYOR

CERTIFIED CORRECT: Patrick A. Carroll

Registered Land Surveyor

DATE: 01-06-01

TIE SKETCH

(Show at least four ties)

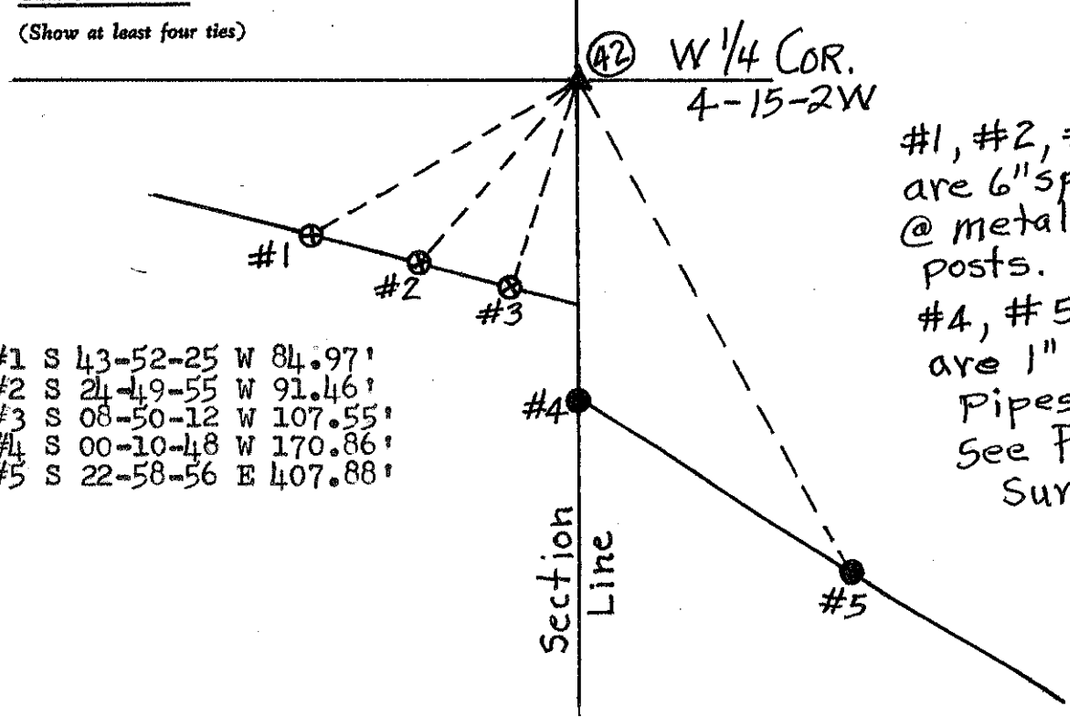

#1 S 43-52-25 W 84.97'
#2 S 24-49-55 W 91.46'
#3 S 08-50-12 W 107.55'
#4 S 00-10-48 W 170.86'
#5 S 22-58-56 E 407.88'

#1, #2, #3 are 6" spikes @ metal fence posts.
#4, #5 are 1" iron pipes
See Plat of Survey's

N

1/6