


21502120000

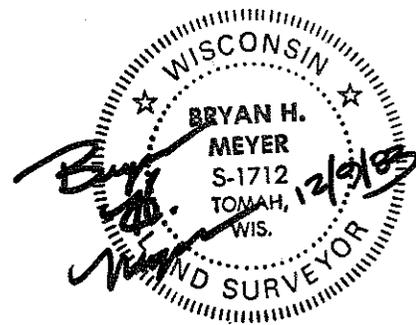

I, Bryan H. Meyer, do hereby certify that on the 2nd day of November 1983, I found (evidence) ~~no evidence~~ of the Southeast corner of Section 12, T 15 N, R 2 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

History of corner establishment since Original Government Survey

Hamilton LaRue was here in January and June of 1897. Fred A. Holden was here in February of 1901 and set an iron bar. Description of corner evidence found:

Could not find Holden's bar. Accepted 3-way fence corner as the best available evidence.

Dated this 9th day of Dec. 1983.

Bryan H. Meyer
Deputy County Surveyor
Title

COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:


Crew: Meyer, Perrigo
Date: November 2, 1983 - 11:30 A.M.
Weather: Foggy, 60°±.

Witnesses to corner location:

Bryan H. Meyer

Dennis Perrigo

Set Harrison, up 1", on South side of angle iron corner post, 8 feet West of ditch centerline.

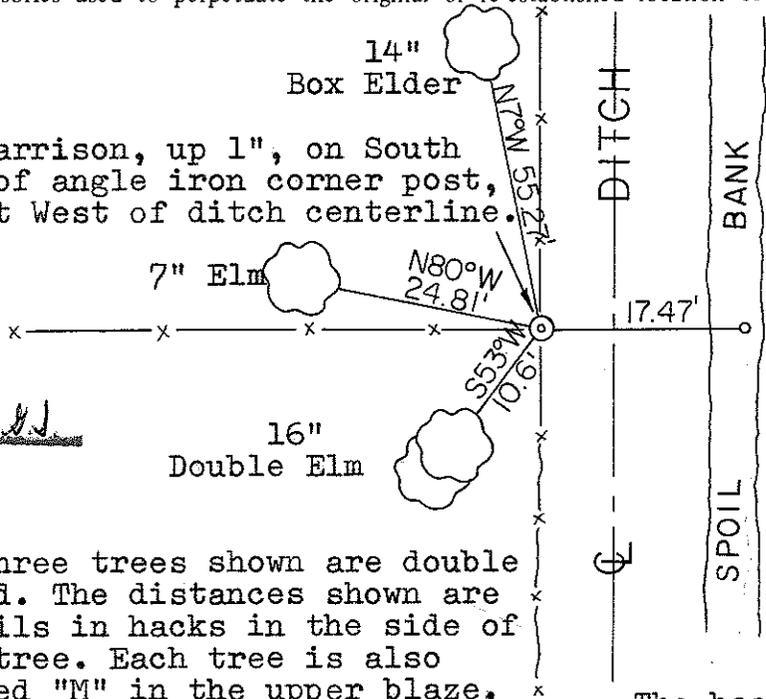

Set 1"x66" iron pipe in spoil bank.

SIGN PLACED 7-21-89 H.J.

APPROVED: Harley A. Sime
Monroe County Surveyor

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

The three trees shown are double blazed. The distances shown are to nails in hacks in the side of each tree. Each tree is also scribed "M" in the upper blaze.

The bearings shown are hand compass bearings.

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~City, Village or~~ Town of Sheldon

County of Monroe

