

CERTIFICATE

CERTIFIED LAND CORNER

No. III

21502300000

I, William C. Jung, do hereby certify that on the 16th day of June 1983, I found (evidence) ~~(no evidence)~~ of the Southwest corner of Section 29, T15 N, R 2 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 2nd day of March 1984.

William C. Jung

Deputy County Surveyor, R.L.S. 1323
Title


History of corner establishment since Original Government Survey

Fred Holden set a stone at the original corner in April of 1905.

Description of corner evidence found:

I found Holden's stone at the original government corner.

Approved: **HARLEY A. SIME**
MONROE CO. SURVEYOR

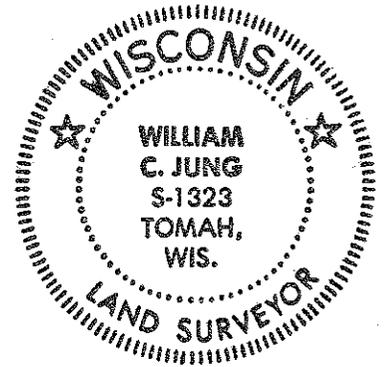

COUNTY SURVEYOR FORM NO. 1


Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

William Jung

Dallas Wilhite

Found a stone with "cross". Stone is up 17" and measures 6"x12". I dug a pit 4' to the West and mounded the stone.

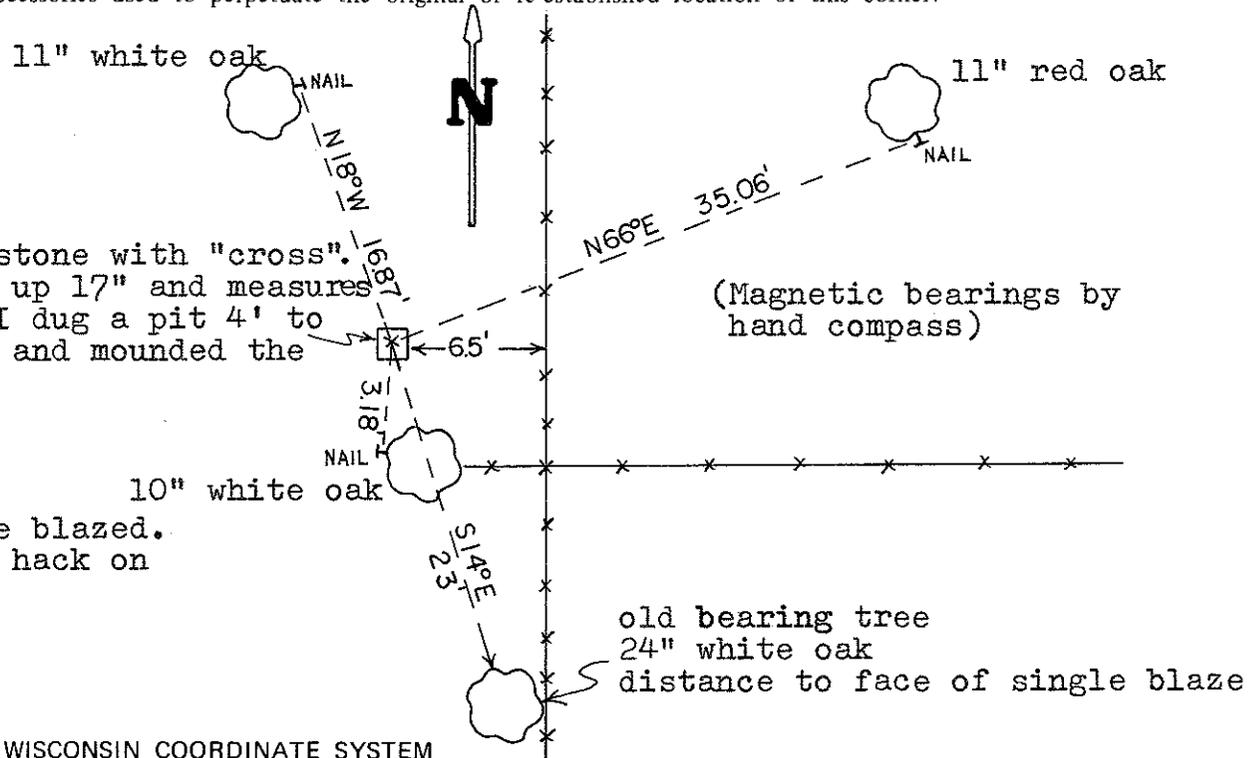


Note: All new bearing trees are double blazed. Each distance is to a nail in a hack on the side of the tree.

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

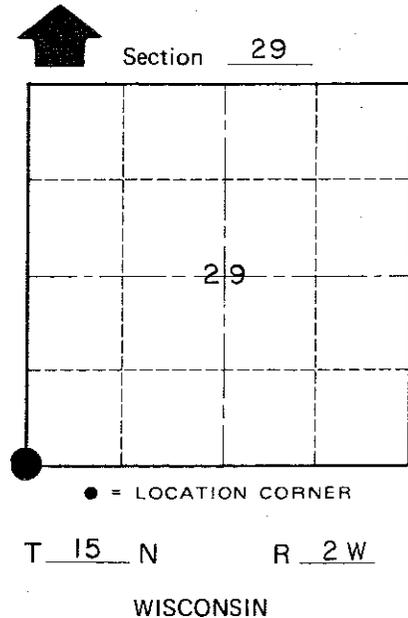

City, Village or Town of Sheldon
County of Monroe
Wisconsin