

21502310000

I, William C. Jung, do hereby certify that on the 24th day of April 19 84, I found ~~(evidence)~~ (no evidence) of the Southeast corner of Section 31, T 15 N, R 2 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 8th day of May 19 84.

William C. Jung

Deputy County Surveyor, R.L.S. 1323
Title

History of corner establishment since Original Government Survey

Wm. Kowner, Vernon County Surveyor, shows this corner in a survey done in April of 1878. Kowner was again at this corner in a survey done in February and March of 1882. The Monroe County records show that a surveyor was at this corner in March of 1898. Schroeder and/or LaRue from the Monroe County Surveyor's office set this

Description of corner evidence found: corner on November 29, 1899.

I set the corner by single proportionate measurement using the S1/4 of Section 31 and the Southeast of Section 32. This fits the evidence along the Town and County line very well. About 295 feet to the South is an old line fence going to the East. In March of 1882 Kowner shows a distance of 293 feet when he was surveying in Section 5-T14N-R2W.




Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

William C. Jung

Set 1 1/2"x3' iron pipe with a 2" top, NW of utility pole

Set a Harrison marker, down 7", on West edge of gravel road

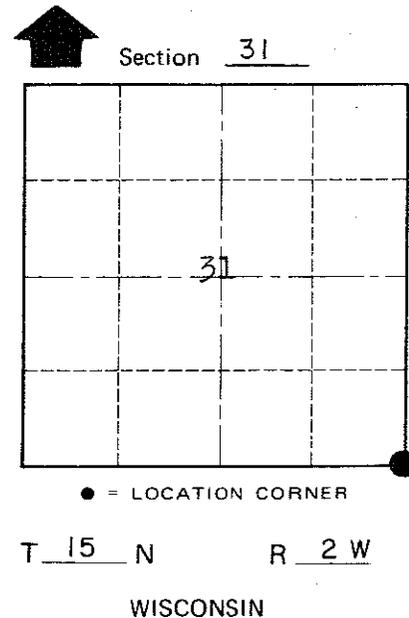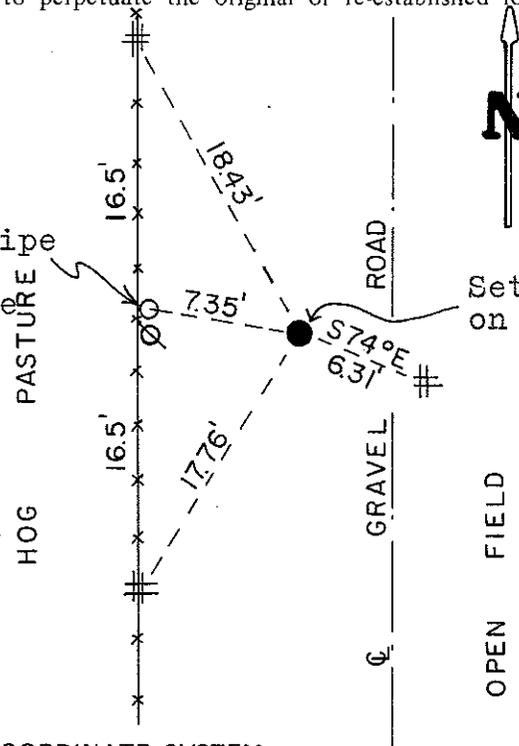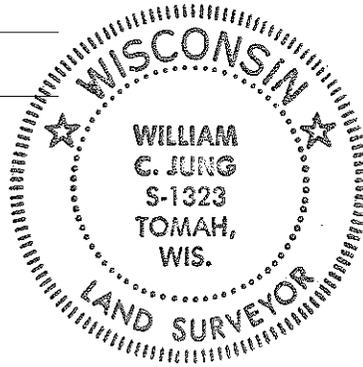

= Set 1 1/16"x24" round iron bar

Approved: Harley Sime
County Surveyor

SURVEY CONTROL ORDER

Horizontal _____
Vertical _____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~City, Village~~ or Town Sheldon
County of Monroe
Wisconsin