

VERNON COUNTY CERTIFIED U.S. PUBLIC LAND SURVEY MONUMENT RECORD

INSTRUCTIONS: THIS RECORD SHALL SHOW THE LOCATION OF THE CORNER AND SHALL INCLUDE ALL OF THE FOLLOWING ELEMENTS (A-I)

(A) IDENTIFY THE CORNER BY REFERENCE TO THE U.S. PUBLIC LAND SURVEY SYSTEM

■ = CORNER MONUMENT RESTORED

WITNESSES TO CORNER LOCATION:

- 1) Robert M. Lampman
- 2) Jessica A. Zamor

VERNON COUNTY COORDINATES - NAD83(1991) - SURVEY FEET


NORTHING: 211000.983

EASTING: 780535.972

MONROE COUNTY COORDINATES - NAD83(1991) - SURVEY FEET

NORTHING: 300068.292

EASTING: 684084.695

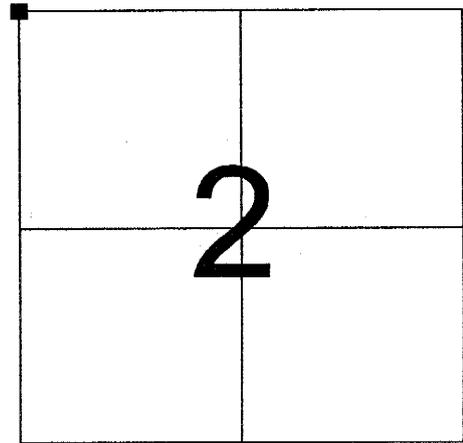

SECTION 2
TOWN 14 NORTH, RANGE 2 WEST

(B) DESCRIBE ANY RECORD EVIDENCE, MONUMENT EVIDENCE, OCCUPATIONAL EVIDENCE, TESTIMONIAL EVIDENCE OR ANY OTHER MATERIAL EVIDENCE YOU CONSIDERED, AND WHETHER THE MONUMENT WAS FOUND OR PLACED.


Accepted location of existing U.S. Army Corps of Engineers monument (iron pipe with brass cap) as best available evidence of the original government corner location.

(See corner history on reverse side of sheet.)

(C) IN THE PLAN VIEW DRAWING BELOW, PROVIDE REFERENCE TIES TO AT LEAST 4 WITNESS MONUMENTS OR, IF THE LOCATION IS WITHIN A MUNICIPALITY, TO AT LEAST 2 WITNESS MONUMENTS. (WITNESS MONUMENTS SHALL BE MADE OF CONCRETE, NATURAL STONE, IRON, OR OTHER EQUALLY DURABLE MATERIAL.) DESCRIBE WITNESS MONUMENTS.

(D) SHOW A PLAN VIEW DRAWING, DEPICTING THE RELEVANT MONUMENTS AND REFERENCE TIES, WHICH IS SUFFICIENTLY DETAILED TO ENABLE ACCURATE RELOCATION OF THE CORNER MONUMENT IF IT IS DISTURBED.

NOT TO SCALE

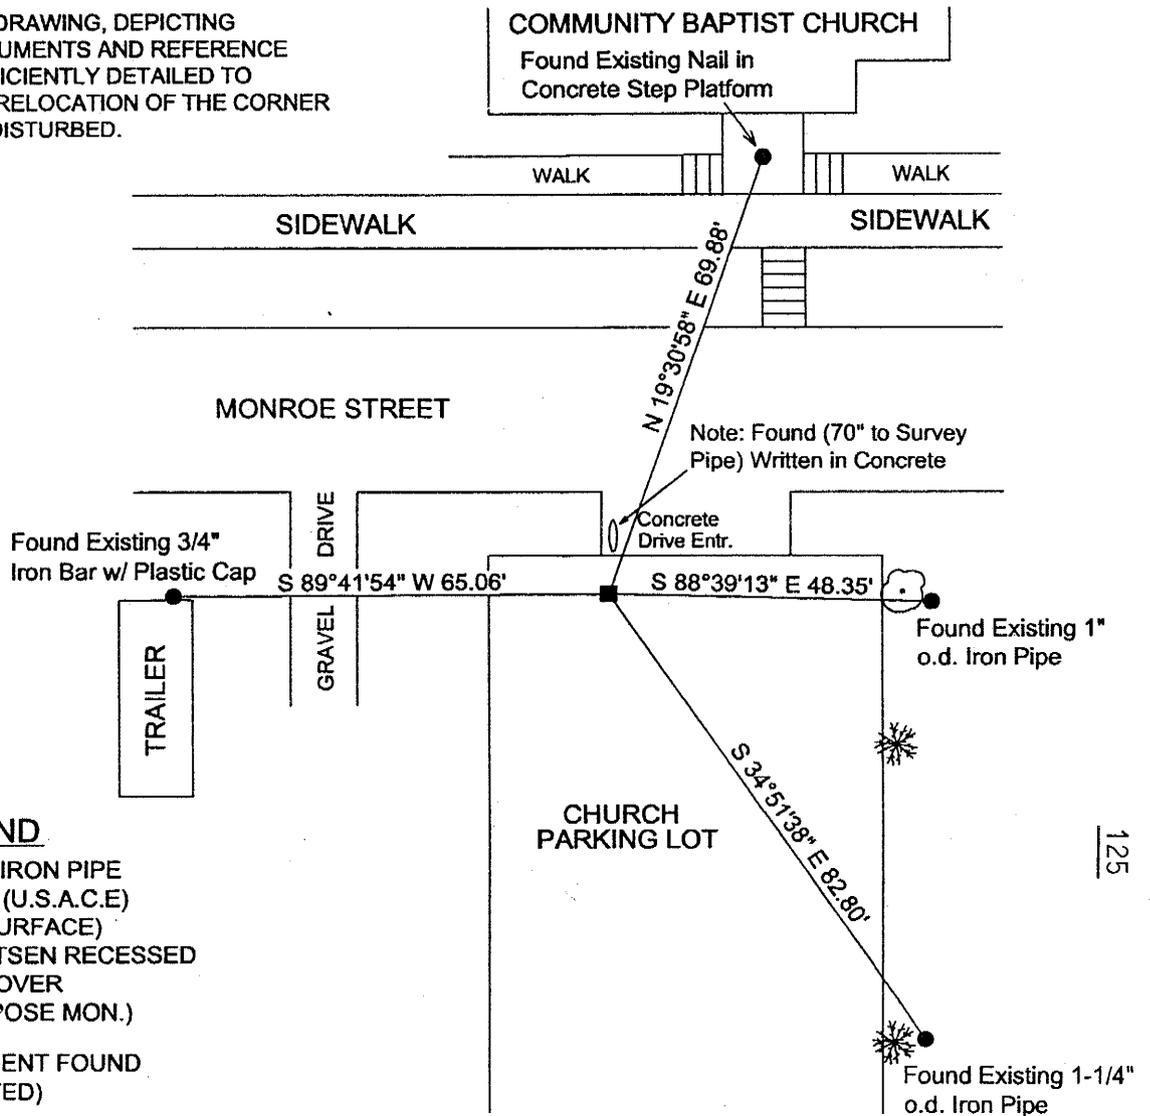

LEGEND

- FOUND EXISTING IRON PIPE WITH BRASS CAP (U.S.A.C.E) (BELOW PAVED SURFACE) INSTALLED BERNTSEN RECESSED HINGE ACCESS COVER (OPEN LID TO EXPOSE MON.)
- EXISTING MONUMENT FOUND (TYPE AS INDICATED)

125

Corner No. 21502340000

(E) DESCRIBE ANY MATERIAL DISCREPANCY BETWEEN THE LOCATION OF THE CORNER AS RESTORED OR REESTABLISHED AND THE LOCATION OF THAT CORNER AS PREVIOUSLY RESTORED OR REESTABLISHED BY DISTANCE AND DIRECTION. SHOW THE DISCREPANCY ON THE PLAN VIEW DRAWING UNDER (D), ABOVE. SHOW THE DISTANCES BETWEEN THE CORNER AS PREVIOUSLY RESTORED OR REESTABLISHED AND (1) THE CORNER AS RESTORED OR REESTABLISHED, AND (2) TO AT LEAST 2 OF THE WITNESS MONUMENTS AS SHOWN ON THE DRAWING IN (D), ABOVE.

N/A

(F) WAS THE CORNER RESTORED THROUGH ACCEPTANCE OF (1) AN OBLITERATED EVIDENCE LOCATION, OR (2) A FOUND PERPETUATED LOCATION?

(2) A FOUND PERPETUATED LOCATION

(G & H) WAS THE CORNER REESTABLISHED THROUGH LOST CORNER PROPORTIONATE METHODS? IF SO SHOW THE METHOD, INCLUDING THE DIRECTIONS AND DISTANCES TO OTHER PUBLIC LAND SURVEY CORNERS USED AS EVIDENCE OR USED FOR PROPORTIONING IN DETERMINING THE CORNER LOCATION.

N/A

(**) ANY ADDITIONAL INFORMATION RELATED TO CORNER LOCATION

CORNER HISTORY:

-Original government corner location established by Uriah Biggs in 1845.

-W.H.Knowler reestablished the corner by measurement as part of a subdivision of Section 3, T14N, R2W dated June of 1878. Knowler's survey lists a new witness for the corner.

-J.H.Daniels prepared the Village Plat of Ontario and Millards Addition to Ontario. Said plats were dated 1857 and 1873 respectively. Both of said plats were tied to this corner.

-Ralph J. Van Dorpe, Illinois Registered Land Surveyor for the U.S.Army Corps of Engineers reestablished this corner as part of a property survey for the Kickapoo River Reservoir during 1965 and 1966. Plat of Survey prepared by Van Dorpe calls for a 2" iron pipe with brass cap at this corner. Van Dorpe's survey indicates that the corner was reestablished from an old stone found in a subdivision to the north.

-Numerous surveys have been tied to the existing Army Corps of Engineers monument at this corner. All of said surveys will not be listed here. However, the list compiled during research did include surveys by Callaway, Carroll, Crook, Dechant, Hefner, Marten, Maxwell, Sime and Zeitlow. Also included were highway plans for S.T.H."131". Said surveys and plans dating from 1972 to 2002.

-Surveys in the area immediately adjacent to the corner include Vernon County Certified Survey Map No. 218, Volume 5, Page 202, Document No. 385357 and Vernon County Certified Survey Map No. 236, Volume 5, Page 247, Doc.No. 386800.


NOTE: Photographs of monument and access cover included as attachment to this form.


AFFIX LAND SURVEYOR SEAL



(I) I, ROBERT M. LAMPMAN, CERTIFY THAT THE LOCATION SHOWN ON THIS RECORD WAS DETERMINED BY ME OR UNDER MY DIRECTION AND CONTROL AND THAT THIS U.S. PUBLIC LAND SURVEY MONUMENT RECORD IS CORRECT AND COMPLETE TO THE BEST OF MY KNOWLEDGE AND BELIEF.

SIGNATURE

DATE

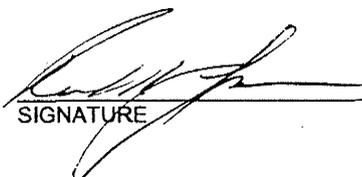 3-10-04

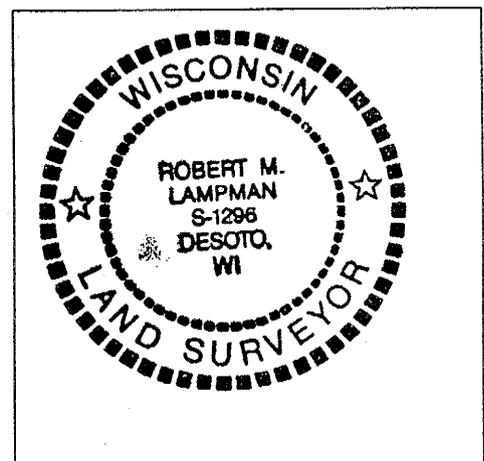

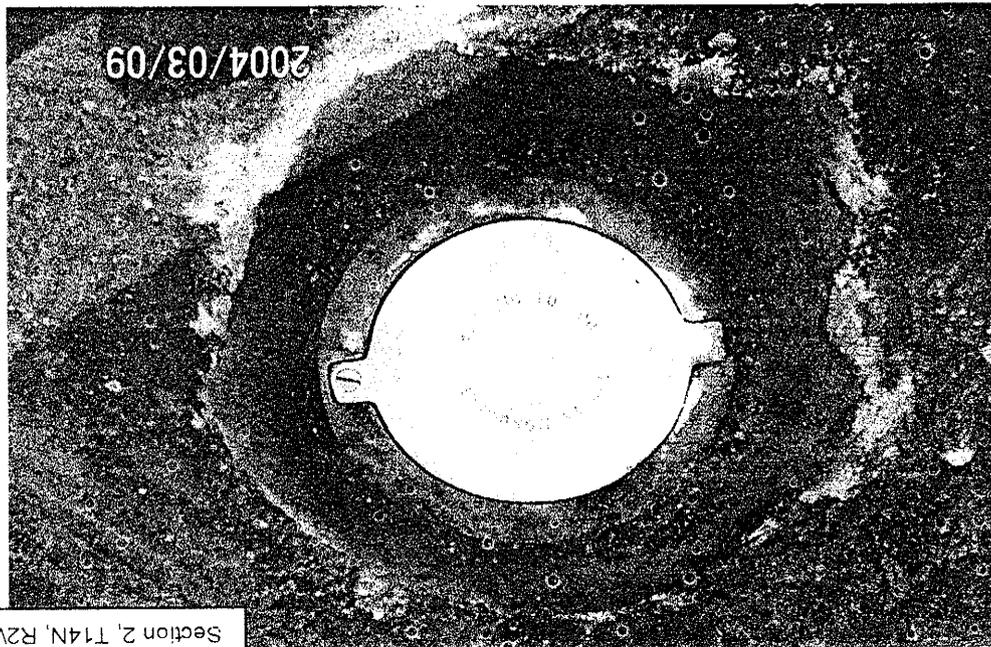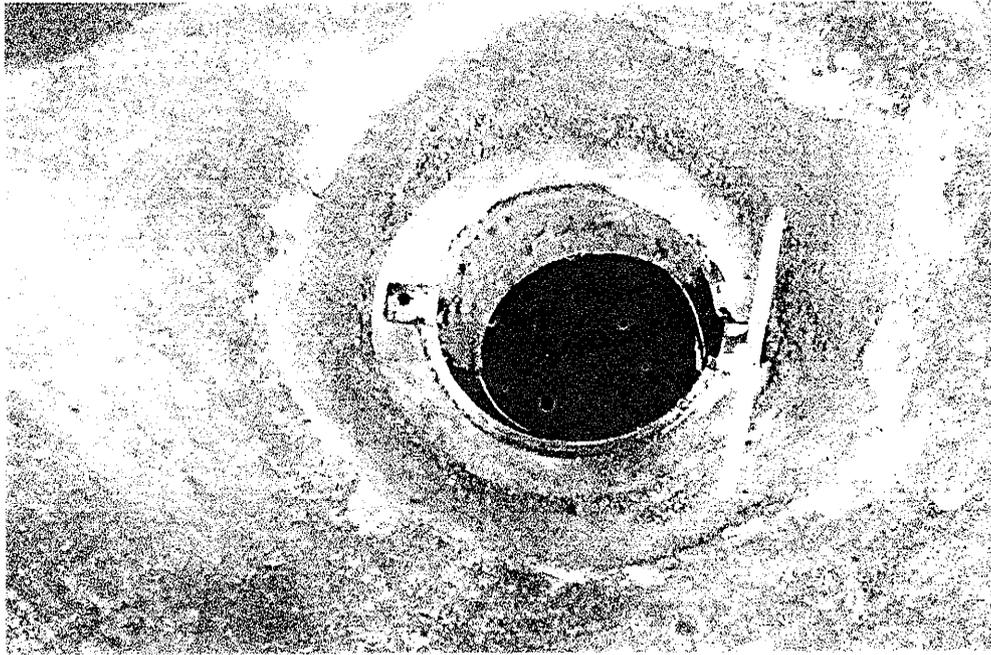

JAZ 3/10/2004 3:03:19 PM	Note
Attachment - Public Land Survey Monument Record for NW Corner of Section 2, T14N, R2W	