

21503062000

I, Garold A. Sime, do hereby certify that on the 8th day of June 19 84, I found ~~(evidence)~~ ~~(evidence)~~ of the E 1/4 corner of Section 6, T15 N, R 3 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 28th day of Sept. 1984.

Garold A. Sime

Garold A. Sime, R.L.S. 1261

History of corner establishment since Original Government Survey

Fred Holden was at this corner in April of 1903 and set an iron thimble 19 lks. South of corner. He was also here in Sept. of 1910. W.H. Sheldon was at this corner in 1878 in surveying the plat of Melvina. There was also another surveyor (Schroeder?) here April 22, ?

Description of corner evidence found:

Set this corner 19 lks. north of Holdens iron thimble.

COUNTY SURVEYOR FORM NO. 1




Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Set Harrison Monument at corner

Witnesses to corner location:

G.A. Sime

Dallas Wilhite

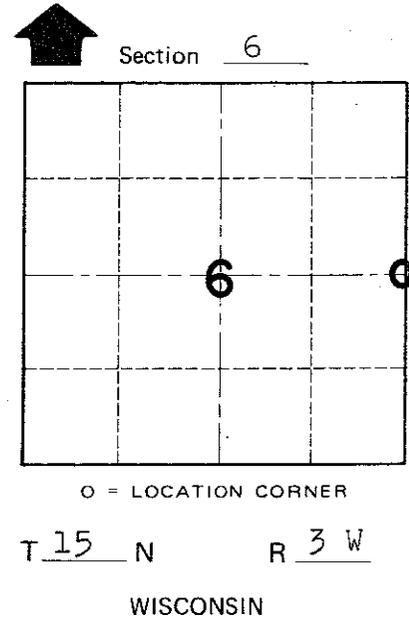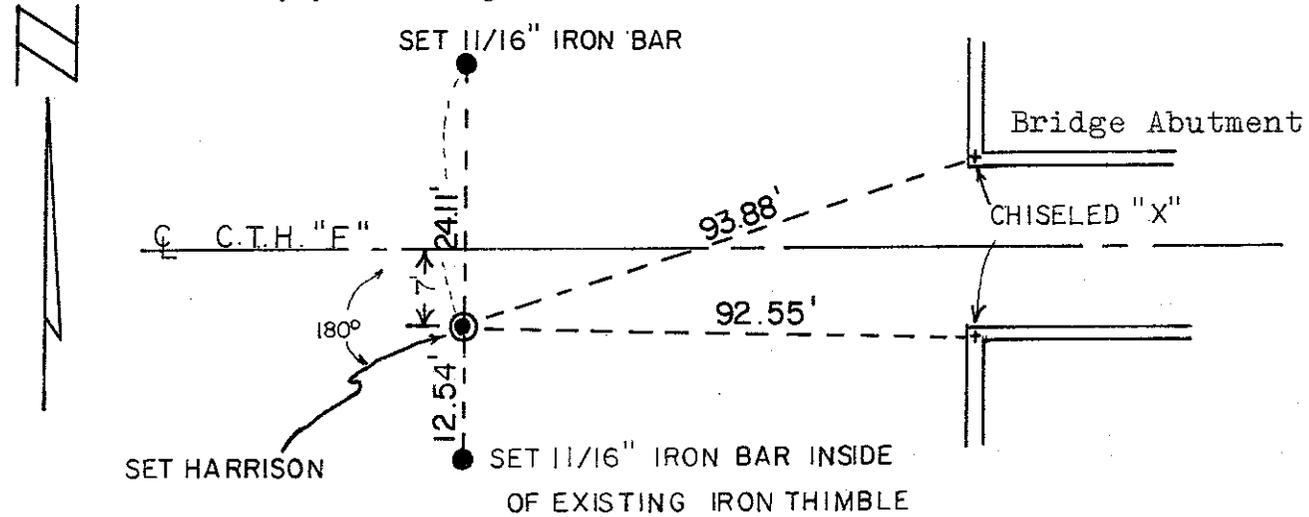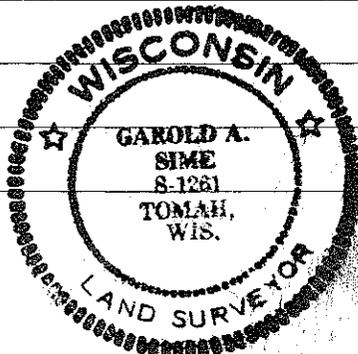

SIGN PLACED 3-29-90 J. Sime

SURVEY CONTROL ORDER

|            |       |
|------------|-------|
| Horizontal | _____ |
| Vertical   | _____ |

WISCONSIN COORDINATE SYSTEM

| Corner            | East (X) | North (Y) | Elevation (Z) | Zone |
|-------------------|----------|-----------|---------------|------|
| Control Sta. Name |          |           |               |      |

City, Village or Town Jefferson  
 County of Monroe