CERTIFICATE

I, Bryan H. Meyer, do hereby certify that on the 7th day of April 19 89, I found (evidence) ~~(no evidence)~~ of the East ¼ corner of Section 11, T 15 N, R 3 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 6th day of July 19 89.

Bryan H. Meyer

Registered Land Surveyor
Title

CERTIFIED LAND CORNER

No. 39

21503112000

History of corner establishment since Original Government Survey

Webster Kenyon was here in November of 1891. Fred Holden was here sometime in 1908.

Description of corner evidence found:

I re-established this corner equidistant between the Northeast and Southeast corners of Section 11 and in the remnants of and old down North-South fence.

WISCONSIN
BRYAN H. MEYER
S-1712
TOMAH, WIS.
LAND SURVEYOR

COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Crew: Meyer, Forsythe
Date: April 7, 1989 - 4:00 P. M.
Weather: P. Cloudy, 50°±
Witnesses to corner location:

Bryan H. Meyer

Brian Forsythe

H. A. SIME & ASSOC.
Surveying & Land Planning
1819 Stoughton Ave. - P.O. Box 703
TOMAH, WI 54660
608-372-5392

The three trees shown hereon are double blazed; the distance to each is to a nail set in a hack in the side of each tree.

Set cast iron Harrison marker, up 2"±, in remnants of old N-S fence. Set sign on South side of Harrison.

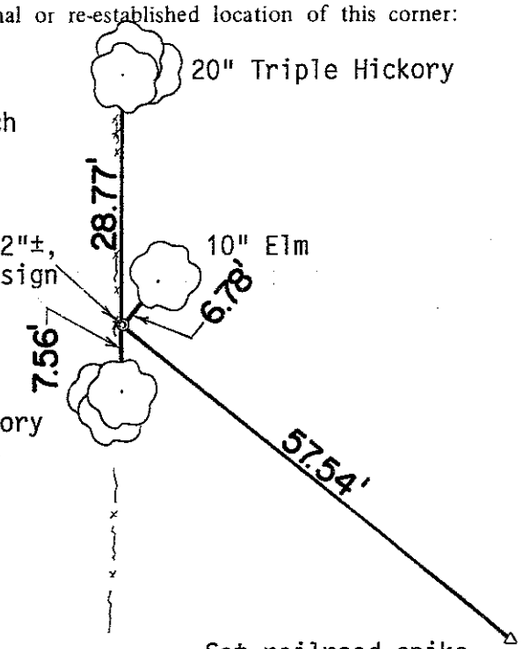

Set railroad spike in field terrace.

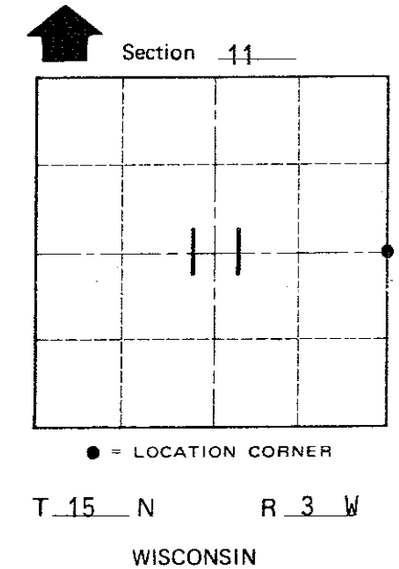

SURVEY CONTROL ORDER

Horizontal	
Vertical	

WISCONSIN COORDINATE SYSTEM

	East (X)	North (Y)	Elevation (Z)	Zone
Corner				
Control Sta. Name				

~~City, Village or~~ Town of Jefferson

County of Monroe