


U. S. PUBLIC LAND SURVEY MONUMENT RECORD

SECTION 21, T15N, R3W, TOWN OF JEFFERSON  
MONROE COUNTY, WISCONSIN

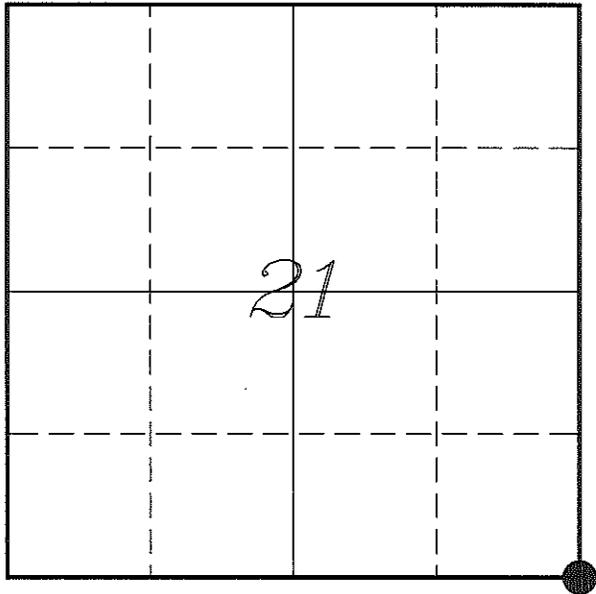

LOCATION OF LANDMARK

MONROE COUNTY COORDINATE SYSTEM	
Northing	310592.384
Easting	647464.413
Datum	NAD 1983 (1991)
Elevation	
Datum	
TYPE OF LANDMARK:	
Set Harrison Monument	
BEARINGS ARE REFERENCED TO:	
Monroe County Coordinates	

Witnesses: Laurence E Johns III  
Larry Handschy

Date: 28 March 2013

Describe any record evidence, monument evidence, testimonial evidence or any other material evidence you considered and whether the monument was found or restored through acceptance of an obliterated evidence location.

No bearing trees of record were located.

I found the 1" iron pipe set by Marten about a foot below the surface.

Based on measurements, it appears that Marten set this corner on a straight line between the E 1/4 Corner of 21 and the E 1/4 Corner of Section 28. And appears to be online with the fence to the West.

This pipe has been used in a couple of surveys and was used extensively in Hefner's surveys.

I accepted the iron pipe as the best available evidence of the original government corner and replaced it with a Harrison Monument and placed it about 6" below the surface.

Describe or show any material discrepancy between the location of the restored corner and that of the corner previously restored or re-established.


Henry Maddin established this corner in January 1847.

Duane Marten was at this corner, in November 1972, during a survey in Section 21. He shows that he set a 1" iron pipe at this location.

Dwayne Hefner was at this corner, from April to November 2007, during several surveys in Section 21. In each survey he shows that he replaced Marten's 1" iron pipe with a Harrison Monument.


## RECORD OF DURABLE WITNESS MONUMENTS

NO	DESCRIPTION	BEARING	DISTANCE
1	Set 3/4" x 18" Iron Rod 1' North of a 18" Hickory	S 34°09'36" W	25.65'
2	Set 3/4" x 18" Iron Rod In Farm Field, 16" Below Surface	S 80°32'21" E	60.05'
3	Set 3/4" x 18" Iron Rod In Fence Line	S 00°12'07" W	79.69'
4	Set 3/4" x 18" Iron Rod In Fence Line	S 88°31'40" W	93.07'

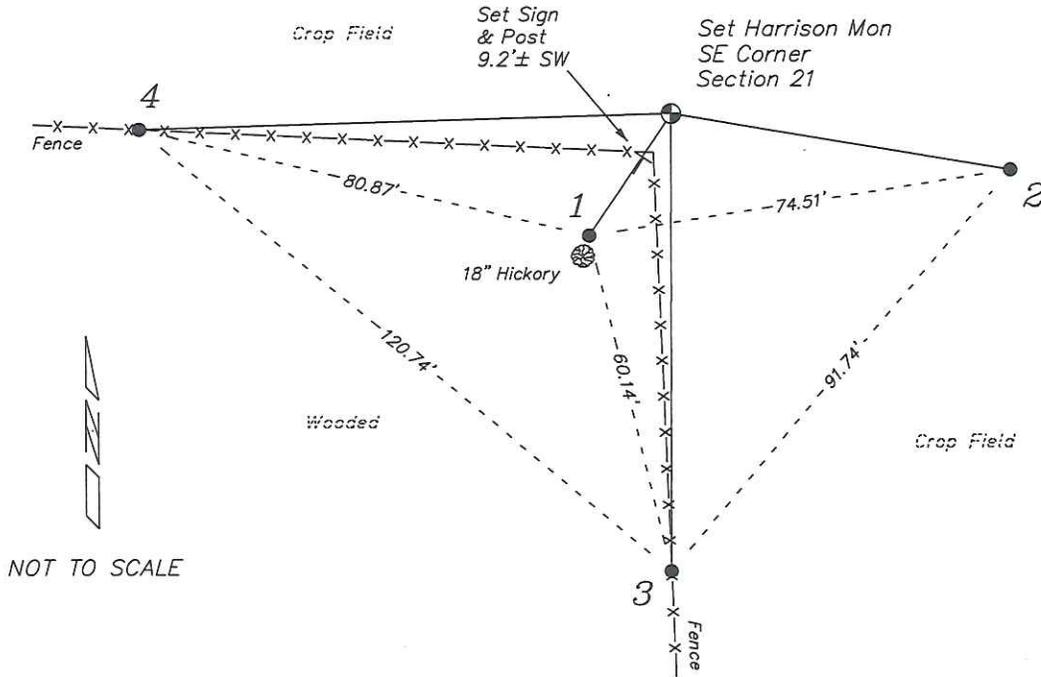

## PLAN VIEW DRAWING OF REFERENCE TIES

Map Showing Distance And Direction To Other Public Land Survey  
Corners Used For Re-Establishing The Corner

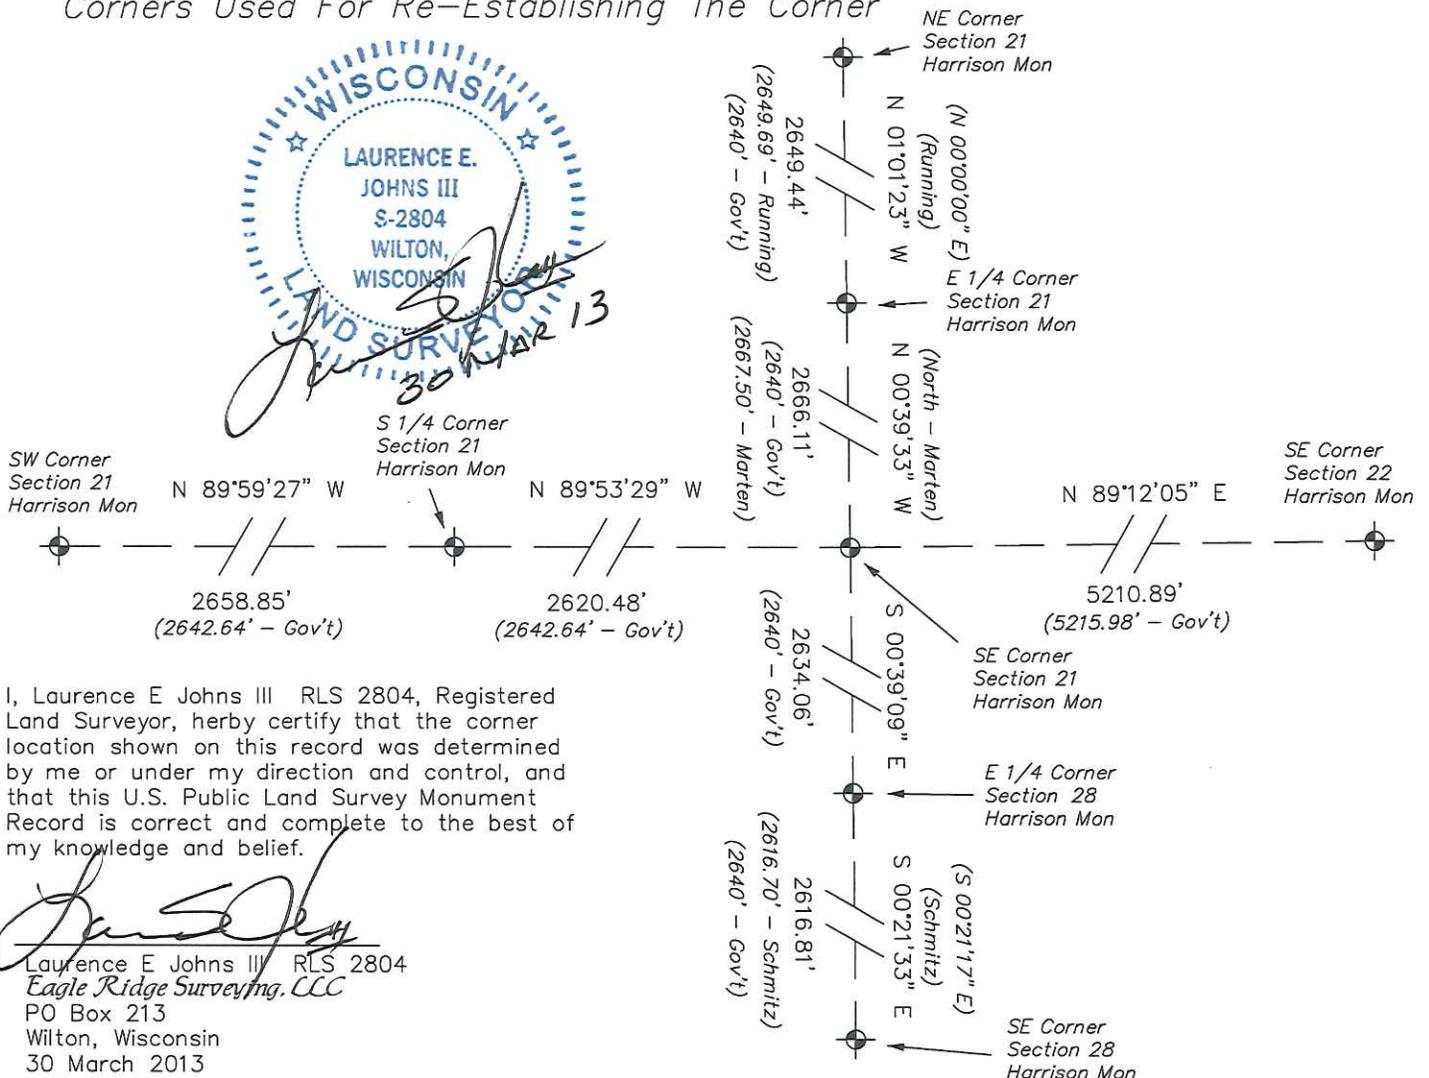


I, Laurence E Johns III RLS 2804, Registered Land Surveyor, hereby certify that the corner location shown on this record was determined by me or under my direction and control, and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

*Laurence E. Johns III*  
 Laurence E Johns III, RLS 2804  
 Eagle Ridge Surveying, LLC  
 PO Box 213  
 Wilton, Wisconsin  
 30 March 2013


U. S. PUBLIC LAND SURVEY MONUMENT RECORD  
'Addendum for Corner Photographs'

SECTION 21, T15N, R3W, TOWN OF JEFFERSON  
MONROE COUNTY, WISCONSIN

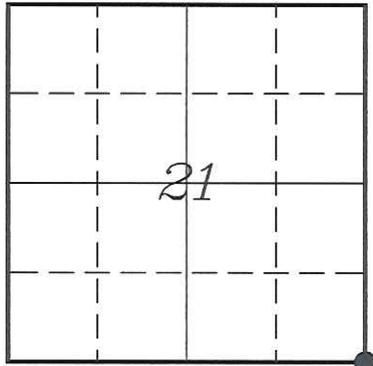

LOCATION OF LANDMARK

Date:  
28 March 2013

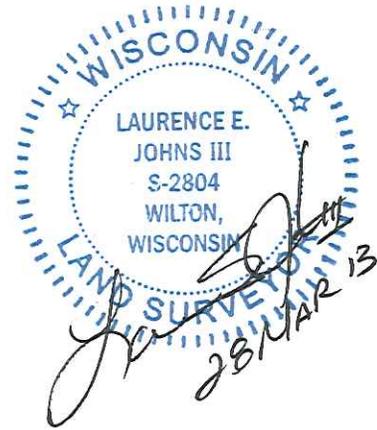

Taken from the Northeast in Field



Taken from the Southeast in Field