

U. S. PUBLIC LAND SURVEY MONUMENT RECORD

SECTION 28, T15N, R3W, TOWN OF JEFFERSON MONROE COUNTY, WISCONSIN

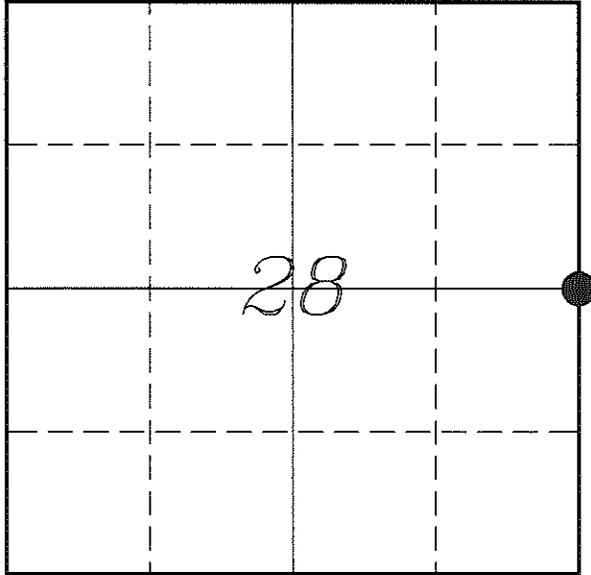

LOCATION OF LANDMARK

<i>MONROE COUNTY COORDINATE SYSTEM</i>	
<i>Northing</i>	<i>307958.499</i>
<i>Easting</i>	<i>647494.411</i>
<i>Datum</i>	<i>NAD 1983 (1991)</i>
<i>Elevation</i>	
<i>Datum</i>	
<i>TYPE OF LANDMARK:</i>	
<i>Set Harrison Monument</i>	
<i>BEARINGS ARE REFERENCED TO:</i>	
<i>Monroe County Coordinates</i>	

Witnesses: Laurence E Johns III
Larry Handschy

Date: 27 March 2013

Describe any record evidence, monument evidence, testimonial evidence or any other material evidence you considered and whether the monument was found or restored through acceptance of an obliterated evidence location.

No bearing trees of record were located.

I found the 3/4" iron rod that Schmitz found during his survey at a 3-way fence corner.

Dwayne Hefner performed a survey in Section 28, in May 2007, in which he should have sub-divided this section to show the '40' lines that he did. If so, he should have used this corner during that survey. This may be the origin of the 3/4" iron rod at this corner. The monument appears to be the same type as he used for temporary monuments at section corners in the past.

This location is 8.7' North and 6.8' East of the split location.

Since there were surveys tied to this location and no other evidence to contradict its location, I accepted the 3/4" iron rod and the occupation as the best available evidence of the original government corner, and replaced it with a Harrison Monument.


Describe or show any material discrepancy between the location of the restored corner and that of the corner previously restored or re-established.

Henry Maddin established this corner in January 1847.

Jon Schmitz was at this corner, in June 2010, during a survey in Section 27. He shows that he found a 3/4" iron rod.

RECORD OF DURABLE WITNESS MONUMENTS


NO	DESCRIPTION	BEARING	DISTANCE
1	Set 3/4" x 18" Iron Rod In Fence Line	N 00°14'03" W	101.08'
2	Set 3/4" x 18" Iron Rod In Fence Line	S 89°54'57" E	55.27'
3	Set 3/4" x 18" Iron Rod In Pasture, down 16"	S 00°51'52" W	65.51'
4	Set 3/4" x 18" Iron Rod In Fence Line	N 89°43'16" W	125.54'

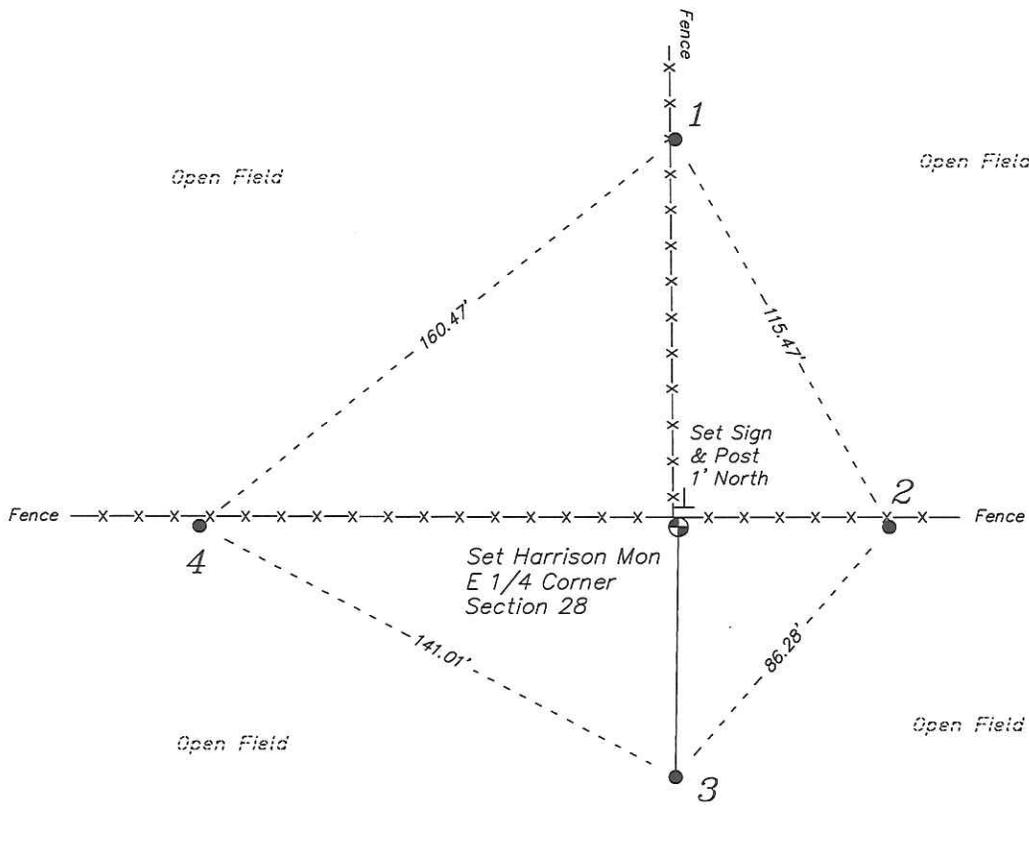

NOT TO SCALE


PLAN VIEW DRAWING OF REFERENCE TIES

Map Showing Distance And Direction To Other Public Land Survey Corners Used For Re-Establishing The Corner

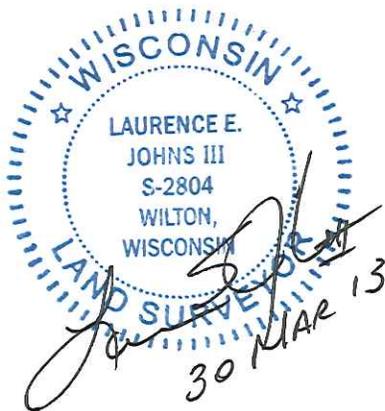


I, Laurence E Johns III RLS 2804, Registered Land Surveyor, hereby certify that the corner location shown on this record was determined by me or under my direction and control, and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Laurence E. Johns III
 Laurence E Johns III RLS 2804
 Eagle Ridge Surveying, LLC
 PO Box 213
 Wilton, Wisconsin
 30 March 2013

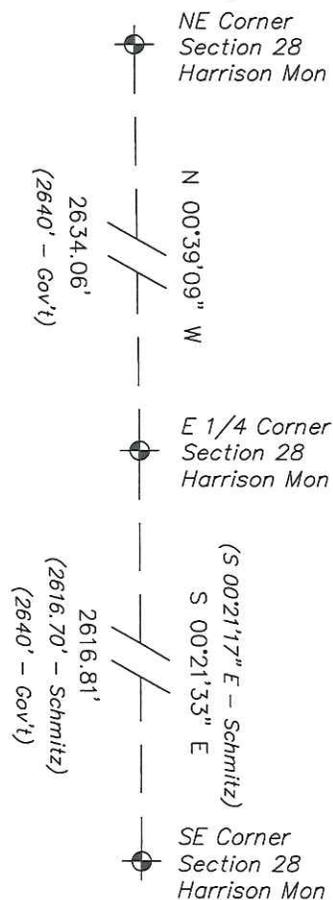


U. S. PUBLIC LAND SURVEY MONUMENT RECORD
'Addendum for Corner Photographs'

SECTION 28, T15N, R3W, TOWN OF JEFFERSON
MONROE COUNTY, WISCONSIN

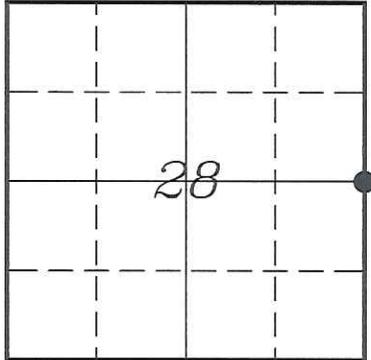

LOCATION OF LANDMARK

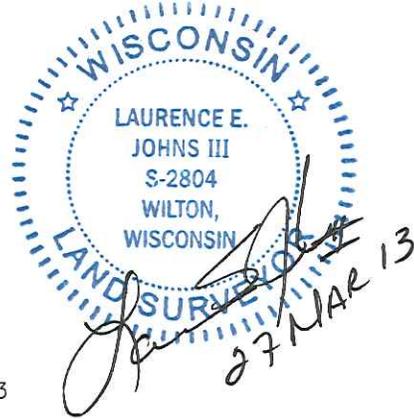

Date:
27 March 2013



Taken from South in the Farm Field