CERTIFICATE

I, Bryan H. Meyer, do hereby certify that on the 14th day of August 19 90, I found (evidence) ~~no evidence~~ of the East ¼ corner of Section 4, T 15 N, R 4 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 17th day of Dec. 19 90.

Bryan H. Meyer

Deputy County Surveyor
Title

CERTIFIED LAND CORNER

No. 17

21504042000

History of corner establishment since Original Government Survey

O. R. Dahl was here in August of 1868. Fred Holden was here in April of 1905 and set a stone with a "+" mark at the corner.

Description of corner evidence found:

I was shown the occupied fence corner by "Bud" Thompson, a lcoal landowner. His father owned the farm prior to him. "Bud" told me that both he and his father accepted this occupied fence corner as the section corner. He told me that he had never seen a stone (with "+" mark) in this area, nor had his father ever mentioned anything about a stone in this area. I searched, probed and dug about a 40' radius around the fence corner but did not find Holden's stone. I accepted the occupied fence corner as the best available evidence.

WISCONSIN
BRYAN H. MEYER
S-1712
TOMAH, WIS.
LAND SURVEYOR

H. A. Sime and Associates
P. O. Box 705
Tomah, Wisconsin 54660
Phone:(608)-372-5392

COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

"Bud" Thompson

Brian Forsythe

John Kenworthy

Bryan H. Meyer

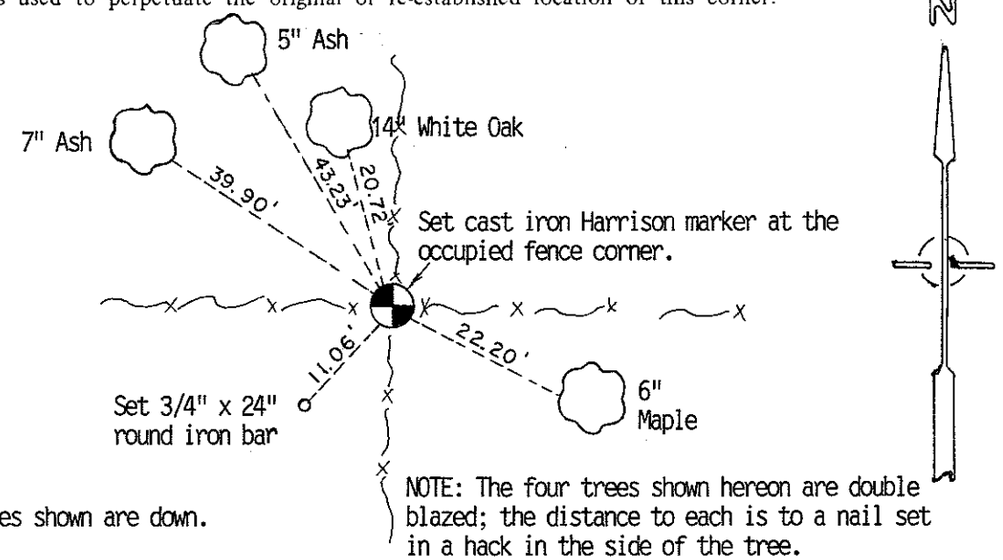

NOTE: The fences shown are down.

NOTE: The four trees shown hereon are double blazed; the distance to each is to a nail set in a hack in the side of the tree.

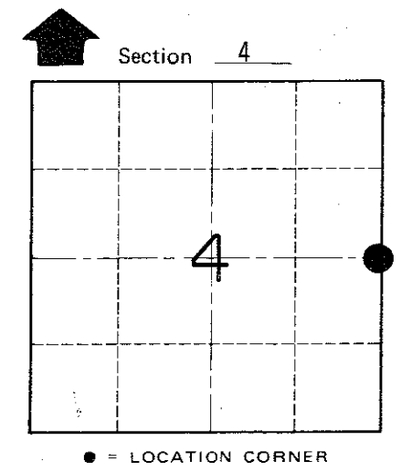

T 15 N R 4 W

WISCONSIN

SURVEY CONTROL ORDER

Horizontal	
Vertical	

WISCONSIN COORDINATE SYSTEM

	East (X)	North (Y)	Elevation (Z)	Zone
Corner				
Control Sta. Name				

~~City, village, or~~ Town of Portland

County of Monroe