


21504310000

I, Ronald R. Hayden, do hereby certify that on the 31 day of March 1990, I found ~~(evidence)~~ (no evidence) of the SW corner of Section 32, T 15 N, R 4 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 27 day of April 1990.

*Ronald R. Hayden*

Ronald R. Hayden, RLS  
Title



History of corner establishment since Original Government Survey

Found no subsequent history of the monument perpetuation since the Original Government survey.

Description of corner evidence found: Searched area for the corner and its witnesses and found no evidence of the corner or its witnesses. Searched Sections 5 & 6, T 14 N, R 4 W, and Sections 31 & 32, T 15 N, R 4 W, for evidence to restore the corner. Excepted found evidence in Section 32, T 15 N, R 4 W, and restored the corner by prorating the south line of Section 32 with the record distances of Knowler's resurvey of Section 5, T 14 N, R 4 W, in 1889. Restored corner fits occupational evidence to the North and East. My guess is the corner was destroyed or lost during the construction of the town road to the south. Set a Harrison monument in a mound of stone. Set sign post 1.26 feet south of the corner. Note: D. Malliet found no evidence of the corner in 1978.



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

Ronald R. Hayden, RLS

Robbie R. Hayden

Steven E. Hayden

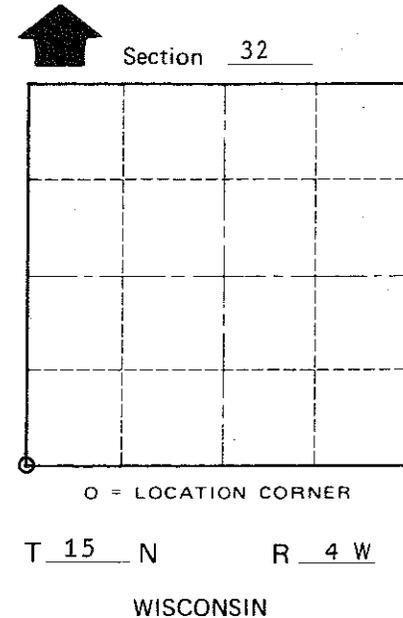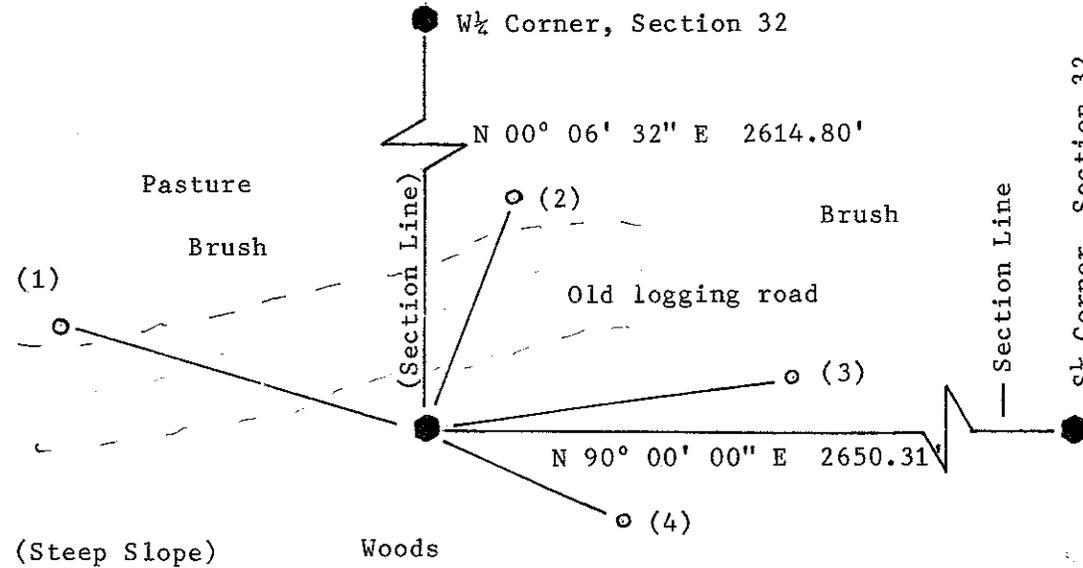

See back for Witness descriptions.

COUNTY SURVEYOR FORM NO. 1

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~City of~~ Town of Portland

County of Monroe

WITNESS DESCRIPTIONS

1. Set 3/4" X 30" iron rebar for witness, which bears: N 74° W 39.93 feet.
2. Set 3/4" X 30" iron rebar for witness, which bears: N 21° E 26.46 feet.
3. Set 3/4" X 30" iron rebar for witness, which bears: N 82° E 38.98 feet.
4. Set 3/4" X 30" iron rebar for witness, which bears: S 66° E 23.08 feet.

Note: all bars were capped with my name and registration number affixed to the top of the bars. The Mound of stone is over 3 feet in diameter. Corner falls on a steep slope and has eroded with stones and gravel.