

21601190020


I, Douglas J. Malliet, do hereby certify that on the 22nd day of July 19 97, I found (no evidence) of the North Quarter corner of Section 30, T 16 N, R 1 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

History of corner establishment since Original Government Survey

I believe W. Kenyon visited and monumented this corner on 22 June 1895. He set a post and established two bearing trees.

Dated this 27th day of March 1998.

Douglas J. Malliet Registered Land Surveyor S-1266 Title

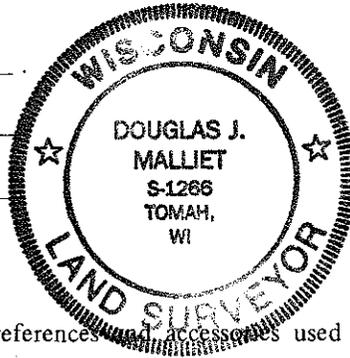


Description of corner evidence found:

I found an existing fence corner of occupation, with fence running East, South and West. Kenyon's bearing trees of record were gone. Accepted the existing fence corner as the best available evidence.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:


Witnesses to corner location:

Douglas J. Malliet, RLS
Bryan H. Meyer, RLS
Garold A. Sime, RLS

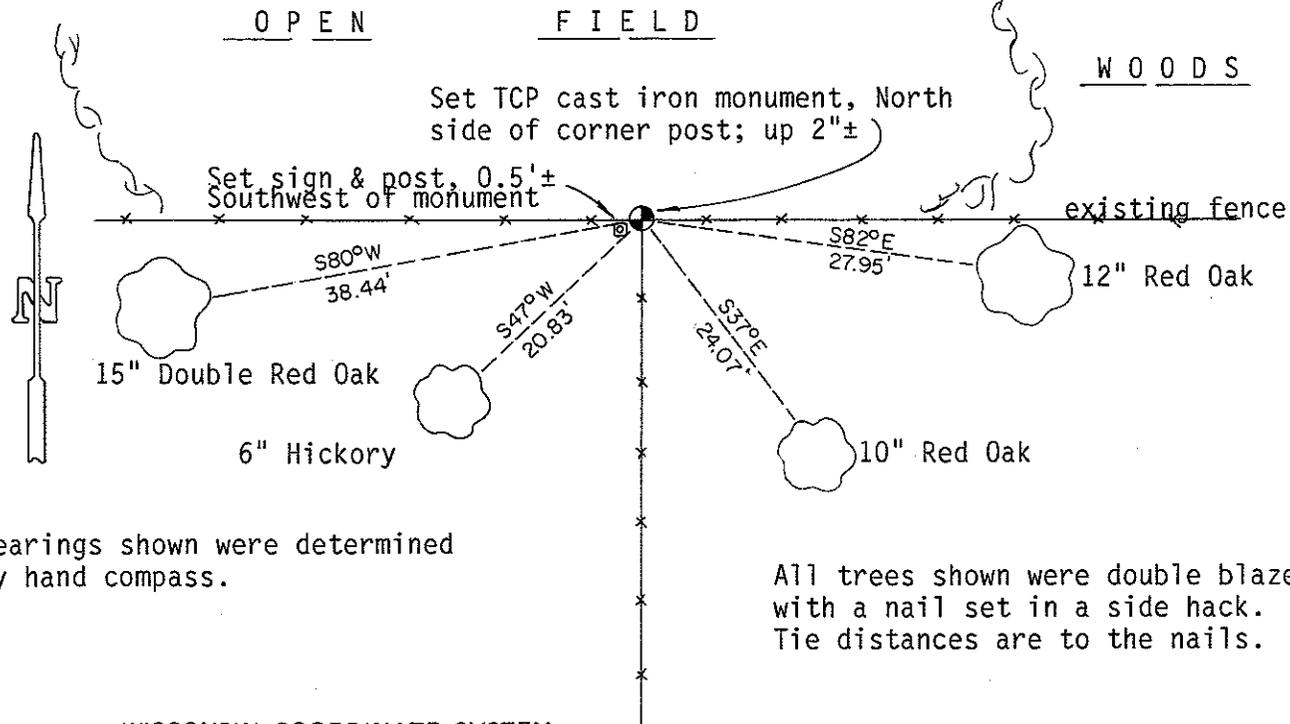

Bearings shown were determined by hand compass.

All trees shown were double blazed with a nail set in a side hack. Tie distances are to the nails.

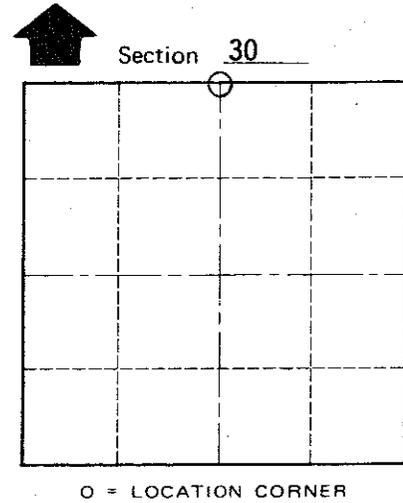

T 16 N R 1 W

WISCONSIN

SURVEY CONTROL ORDER

Table with 2 columns: Control Type (Horizontal, Vertical) and Status (Blank).

WISCONSIN COORDINATE SYSTEM

Table with 5 columns: Corner, East (X), North (Y), Elevation (Z), Zone. Row 1: Control Sta. Name.

County of MONROE Town of WILTON

County of MONROE

4535

COUNTY SURVEYOR FORM NO. 1