

21604342000

I, Gregory J. Hofmeister, do hereby certify that on the eighth day of December 1981, I found (evidence) (no evidence) of the East Quarter corner of Section 34, T 16 N, R 4 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 29th day of January 1982.

Handwritten signature of Gregory J. Hofmeister

Registered Land Surveyor S-1113

Title

History of corner establishment since Original Government Survey

This corner was established in 1847 by Henry Maddin. Fred Holden visited the corner in 1906 at which time he observed one of the two original bearing trees. The corner has not been remonumented since it was established originally.

Description of corner evidence found:

No evidence found. Fences from east & south have been removed by excavation work near the corner. Extending the fences to an intersection produces a location 38 feet south and one foot west of the corner as set. The total length of the section from NE to SE corners is 5273 feet, therefore setting the corner by proportionate measure produced a distances which closely fit the original 40.00 chains for the east lines of the NE 1/4 and SE 1/4 of the section. Owners of the property to the north and west of the corner indicate that the location of the fences is not certain.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:



Witnesses to corner location:

Gregory J. Hofmeister

Ernest H. Koeppe

Approved: HARLEY A. SIME MONROE CO. SURVEYOR

COUNTY SURVEYOR FORM NO. 1

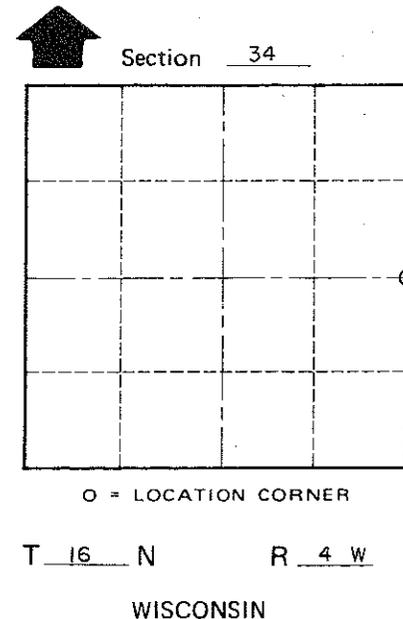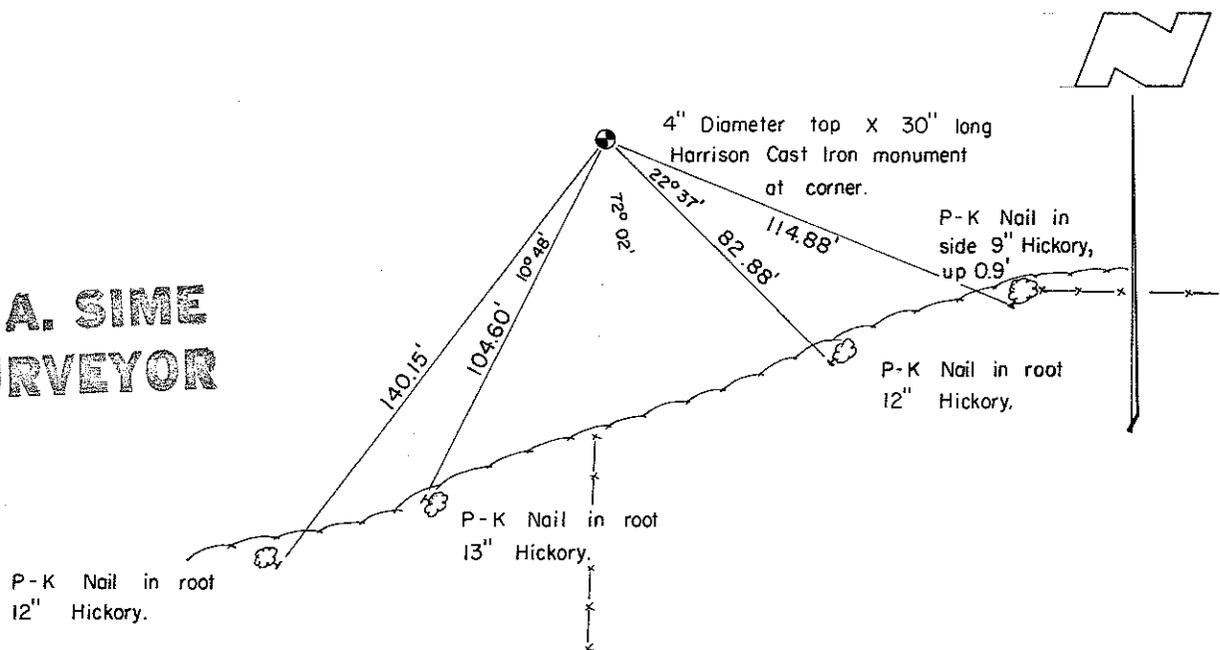

SURVEY CONTROL ORDER

Table with 2 rows: Horizontal, Vertical

WISCONSIN COORDINATE SYSTEM

Table with 5 columns: Corner, East (X), North (Y), Elevation (Z), Zone

City, Village or Town of LEON County of MONROE