

21604362000

I, Gary L. Dechant, do hereby certify that on the 3rd day of July 1991, I found (evidence) (no evidence) of the 1/4 corner of Section 31, T 16 N, R 3 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 3rd day of July 1991.

Gary L. Dechant

Registered Land Surveyor, S-1744

History of corner establishment since Original Government Survey

Fred Holden set a chiselled cross in a sandstone ledge as a reference marker in April of 1903. Henry F. Schroeder was here in May of 1915, makes no mention of finding Holden's reference marker. He states he found "marked 1/4 sec. post" probably set by Holden as Holden reestablished this corner.

Description of corner evidence found:

We spent the better part of a day looking for Holden's chiselled cross using water and barn brooms to clean off moss and dirt that may have been covering the cross. We never did find it. The sandstone ledge is of weak sandstone and may have weathered away, possibly shortly after Holden set the cross, as Schroeder makes no mention of finding it.

We re-established this corner on line with the fence running to the south and at Holden's given distance of 281ks. (18.48') from the face of the sandstone ledge.




COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

David E. Madison

Gary L. Dechant

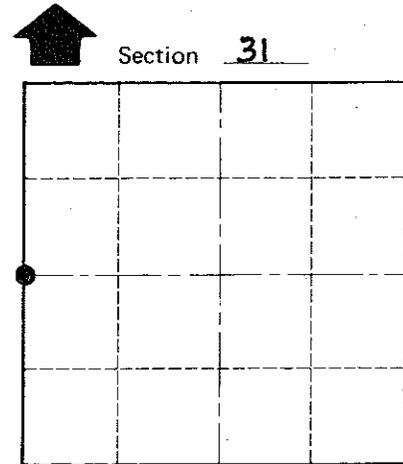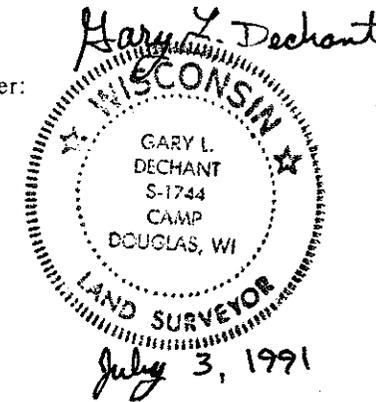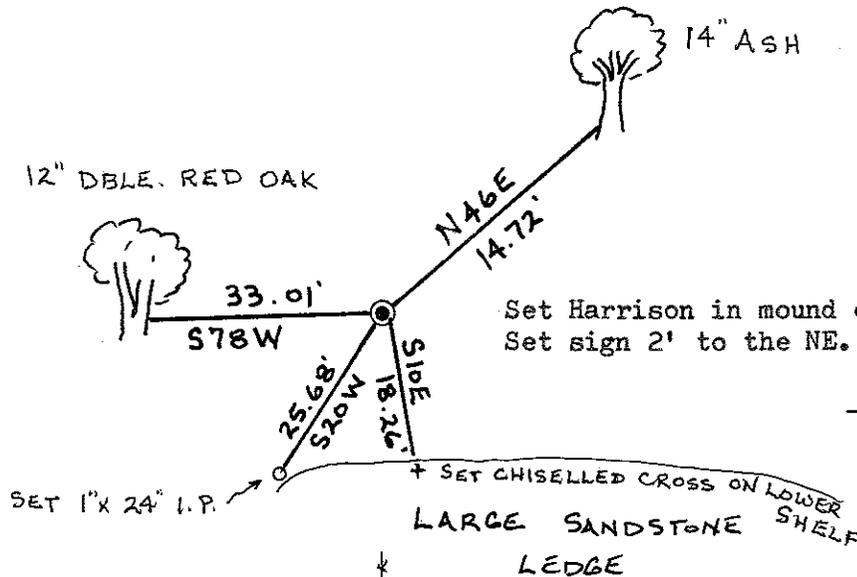

• = LOCATION CORNER

T 16 N R 3 W

WISCONSIN

(Trees doubl blazed with R.R. spike set)

SURVEY CONTROL ORDER

Horizontal \_\_\_\_\_  
Vertical \_\_\_\_\_

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town WELLS

County of MONROE