

CERTIFICATE

CERTIFIED LAND CORNER

No. 88

21701210020

I, William C. Jung, do hereby certify that on the 21st day of June 1978, I found (evidence) (no evidence) of the North 1/4 corner of Section 28, T 17 N, R 1 W, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

History of original corner establishment:

None

Description of corner evidence found:

Set the corner at a distance from the CN 1/16 equal to the distance between the CN 1/16 and the C1/4 and on line with the CN 1/16 and the C 1/4.

Dated this 16th day of Aug. 1978.

William C. Jung, R.L.S. 1323

Crew Chief, County Surveyor's  
Title Office

COUNTY SURVEYOR FORM NO. 1


Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

(All distances were slope chained)

Witnesses to corner location:


G. Dechant

B. Meyer

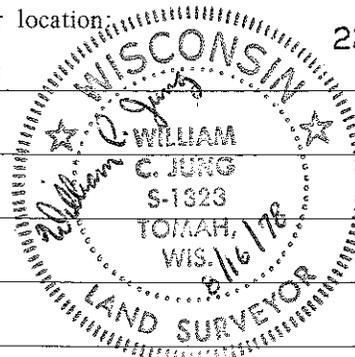

22" White Pine with N&C not blazed.

16" White Pine, not blazed and no N&C

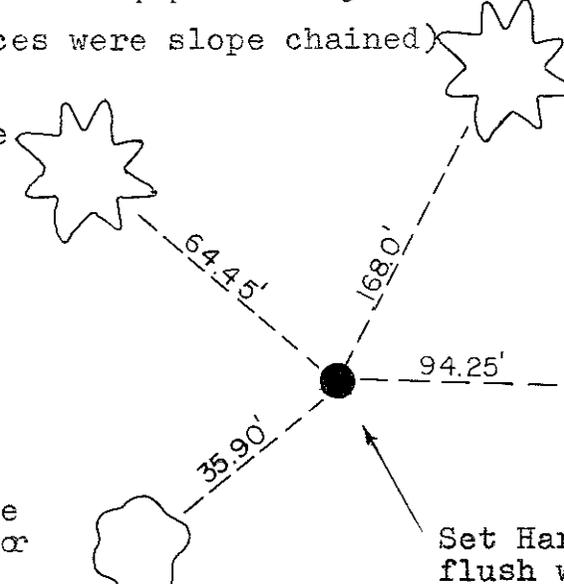


To haymow door of barn.

Set Harrison, flush with ground with small rock and dirt mound around it.

10" Elm with N&C set not blazed

Approved by: Harley A. Sime  
County Surveyor

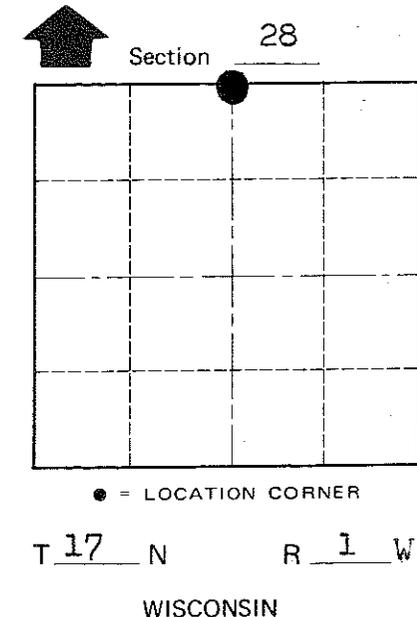

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town Tomah  
County of Monroe