


21701220020

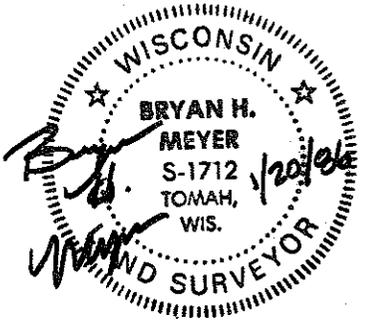

I, Bryan H. Meyer, do hereby certify that on the 18th day of June 1985, I found ~~evidence~~ (no evidence) of the South 1/4 corner of Section 22, T 17 N, R 1 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 20th day of Jan. 1986.

Bryan H. Meyer

Deputy County Surveyor  
Title

History of corner establishment since Original Government Survey

Webster Kenyon was here in April of 1894.

Description of corner evidence found:

I set this corner on line and equidistant between the Southeast and Southwest corners of Section 22. This location fits the forty line fence (the West line of the NE 1/4-NE 1/4, Section 27) within 2 feet±.


COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Crew: Meyer, Wilhite, Lund  
Date: June 18, 1985  
Weather: Rain Showers, 65°F±  
Witnesses to corner location:


Bryan H. Meyer  
Dallas Wilhite  
James Lund

SIGN PLACED 12/22/86  
Kenworthy

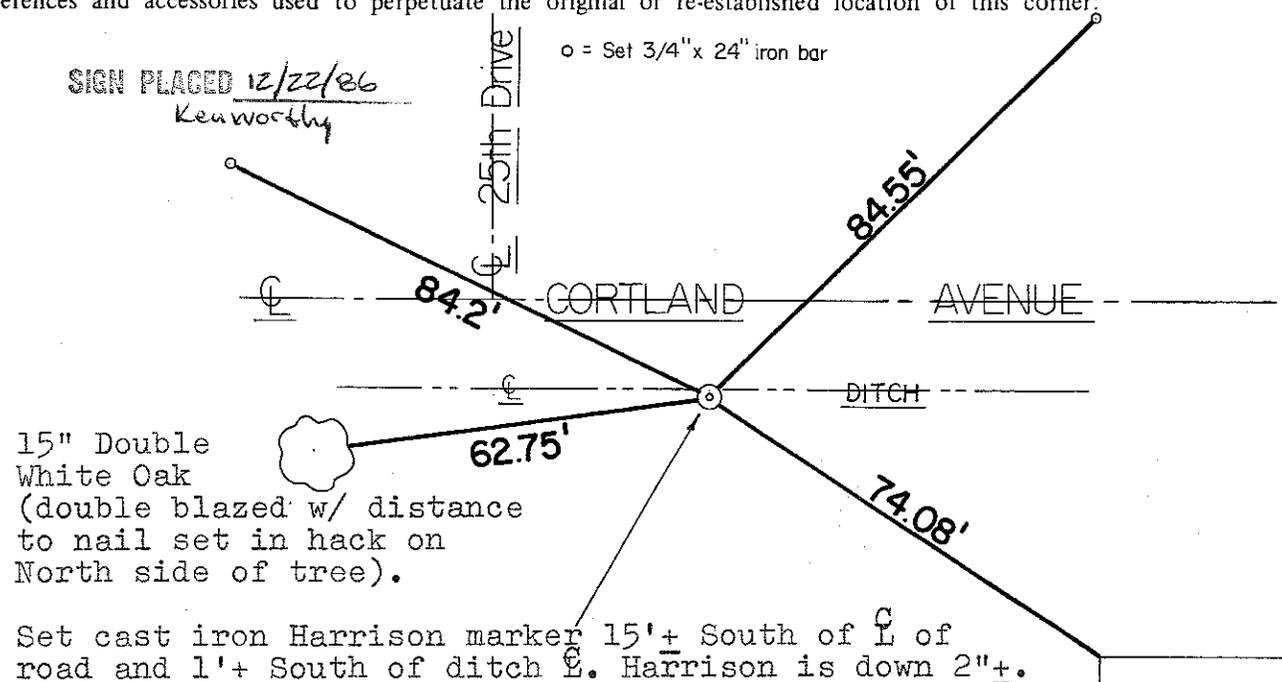

15" Double White Oak (double blazed w/ distance to nail set in hack on North side of tree).

Set cast iron Harrison marker 15'± South of C of road and 1'± South of ditch E. Harrison is down 2"±.

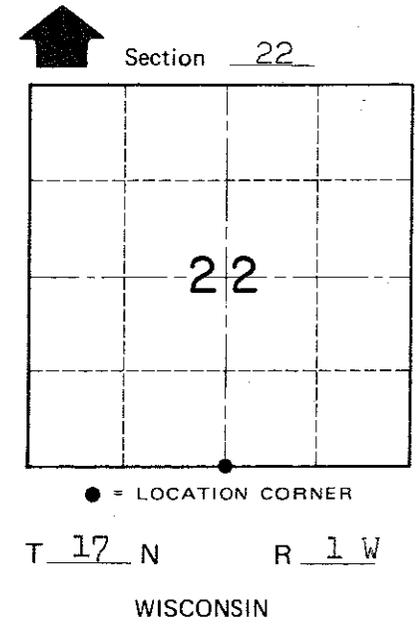

SURVEY CONTROL ORDER

Horizontal \_\_\_\_\_  
Vertical \_\_\_\_\_

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town of Tomah  
County of Monroe