

# 109

**U.S. PUBLIC LAND CORNER  
MAINTENANCE**

**Corner ID : SE Sec. 29, T17N-R1W**

**21701290000**

<u>DATE</u>	<u>CREW</u>	<u>MONUMENT TYPE</u> -----
January 20, 2016	Zachariah P.Dechant Gary L. Dechant	Existing Harrison intact 14' east of Interlude Road On line with fence west of road

References:

	<u>Bearing</u>	<u>Distance</u>
1) Set 3/4"x24" hex iron bar, down 12" in field	N48E	30.00'
2) Set 3/4"x24" hex iron bar, down 12" in field	S68E	24.88'
3) Set 3/4"x24" hex iron bar, down 6", 15' east of 4" Spruce in lawn	S43W	73.10'
4) Set 3/4"x24" hex iron bar, down 6", down 12" in field, 10' west of r/w fence	N56W	59.24'



I, Garold A. Sime, do hereby certify that on the 29th day of June 1978, I found ~~(evidence)~~ (no evidence) of the SE corner of Section 29, T17 N, R 1 W, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 12th day of Dec. 1978.

Garold A. Sime, R.L.S. 1261

Crew Chief, County Surveyor's  
Title Office

History of original corner establishment:

H. LaRue was at this corner in May, 1898.

Description of corner evidence found:

Set on straight line from the S $\frac{1}{4}$  of Section 28 through the SE Corner of the SW $\frac{1}{4}$ -SW $\frac{1}{4}$ , Sec. 28 and equidistant of same line.



**See Reverse Side  
For Maintenance**

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Set Harrison at east edge of traveled road.

Witnesses to corner location:

- G. Sime
- D. Dade
- B. Meyer

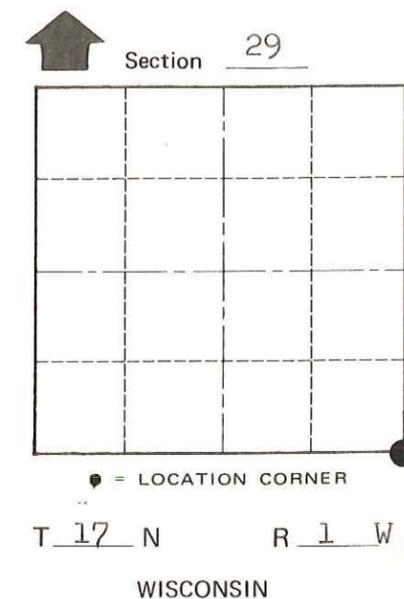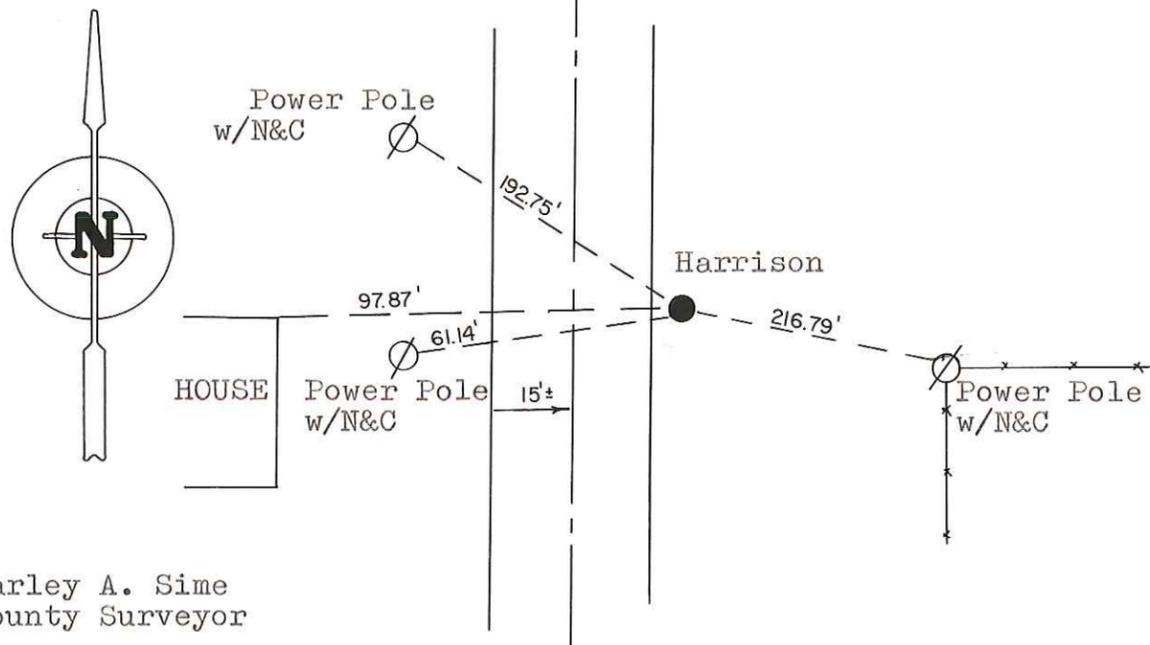

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

Approved by: Harley A. Sime  
County Surveyor

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town Tomah  
County of Monroe

COUNTY SURVEYOR FORM NO. 1