

111

**U.S. PUBLIC LAND CORNER
MAINTENANCE**

**Corner ID : SE Sec. 30, T17N-R1W
21701300000**

DATE	CREW	MONUMENT TYPE -----
February 1, 2016	Zachariah P.Dechant Gary L. Dechant	Existing Harrison intact down 4" in centerline of Interior Road, fences east and west

References:

	<u>Bearing</u>	<u>Distance</u>
1) Set 3/4"x24" hex iron bar, down 6" in pasture	N65E	68.14'
2) Set 3/4"x24" hex iron bar, down 6" in pasture	S64E	45.60'
3) Set 3/4"x24" hex iron bar, down 6"	S65W	49.23'
4) Set 3/4"x24" hex iron bar, down 6", down 6" 7' south of 8" White Pine	N64W	51.63'

Harrison & reference markers set on straight lines.



I, Bryan H. Meyer, do hereby certify that on the 2nd day of August 19 85, I found (evidence) ~~no evidence~~ of the Northwest corner of Section 32, T 17 N, R 1 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 3rd day of Feb. 19 86.

Bryan H. Meyer
Deputy County Surveyor
Title

History of corner establishment since Original Government Survey

Webster Kenyon was at this corner while surveying a Town Road in November of 1856. Henry Schroeder was here in January of 1895 and again in June of 1897. Fred Holden was here in October of 1905.

Description of corner evidence found:

I set this corner at the intersection of the centerline of 23rd Avenue and fence line projections from the east and west. This location fits a call in the Original Notes for the distances to the centerline of a creek West and South of this corner extremely well!



See Reverse Side For Maintenance

COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Crew: Meyer, Lund
Date: August 2, 1985
Weather: P. Cloudy, 75°±.

Witnesses to corner location:



Bryan H. Meyer

James Lund

Both of the bearing trees shown are double blazed each distance shown is to a nail set in a hack in the side of the tree.

Set cast iron Harrison marker, down 2"±, in road centerline.

Both bearing trees are scribed "M" in the upper blaze.

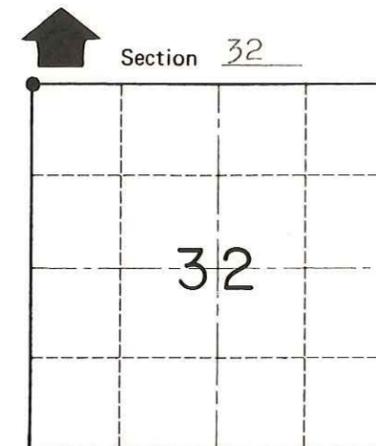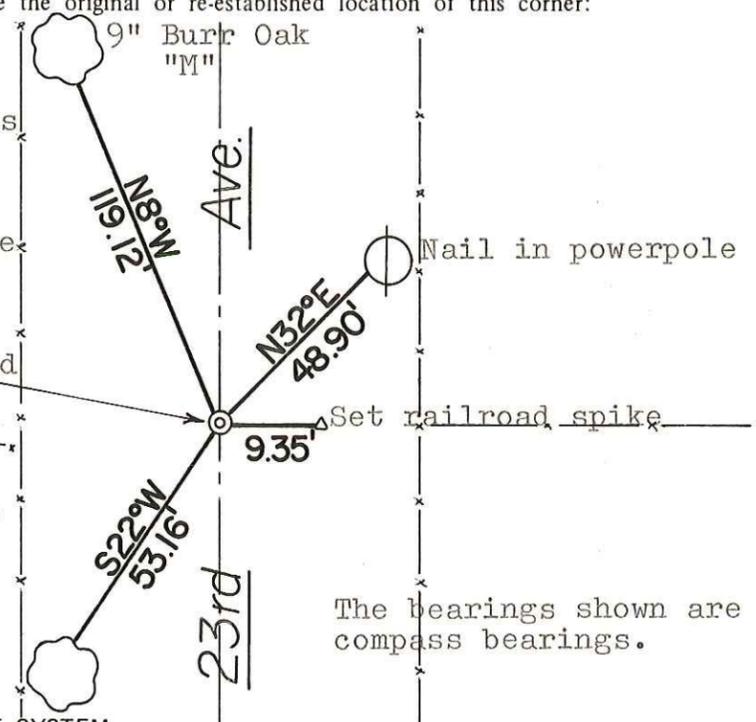

● = LOCATION CORNER
T 17 N R 1 W
WISCONSIN

The bearings shown are magnetic hand compass bearings.

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~City, Village or~~ Town of Tomah
County of Monroe