


**CERTIFICATE**

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 21st day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909  
Anderson Engineering of Minnesota, LLC.

**CERTIFIED LAND CORNER**

**History of corner established since Original Government Survey**

Fred Holden set an iron pipe here in April of 1907. The 1940's McCoy boundary notes show a corner at this location. H. Sime shows an iron pipe at this corner in June of 1961. In Sept. of 1980 William C. Jung did not find the iron pipe and set a Harrison Monument by using the McCoy notes in relation to the existing fence corner.

**Description of evidence found**

On October 30th, 2012, Anderson Engineering of Minnesota located the Harrison monument flush with the ground and 0.5 feet north of a metal "T" post.

No. 21702190000



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

Nick Hillmer  
Josh Oslund  
Dan Greenwald



MONROE COUNTY  
COORDINATE SYSTEM  
NAD 1983 (2007)

HARRISON MONUMENT  
Northing (Y) 373675.19  
Easting (X) 668496.16

Base Station - 22 182W  
Northing (Y) 408053.25  
Easting (X) 679287.00



All distances shown in U.S. Survey Feet.  
Ties are made to 60 D Nails set in trees.  
Bearings are for tie reference purposes only.  
Coordinates derived from RTK GNSS procedures.

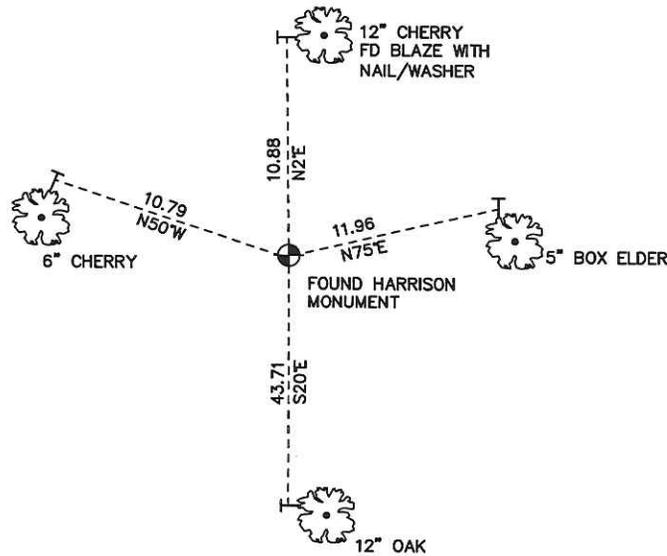

● = LOCATION CORNER  
Corner I.D. SE 19  
T 17 N R 2 W  
Town of Adrian  
Monroe County, WI.

21702190000

I, William C. Jung, do hereby certify that on the 29th day of September 1980 I found SE (no evidence) of the Section 19, T 17 N, R 2 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 23rd day of Feb 1981.

William C. Jung  
William C. Jung, R.L.S. 1323  
Title

History of corner establishment since Original Government Survey  
Fred Holden <sup>Surveyors</sup> set an iron pipe here in April of 1907.  
Camp McCoy found this iron pipe in Dec. of 1944.  
H. Sime shows an iron pipe at this corner in June of 1961.



Description of corner evidence found:

The iron pipe could not be found; therefore, <sup>corner</sup> was reset at the location as shown in the McCoy notes in relation to the existing fence corner. The fence appears to be in the same location as in McCoy notes. This corner also fits the original notes' distance South to the creek.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:


Witnesses to corner location:

G. Dechant  
B. Meyer  
M. Scott Sowers

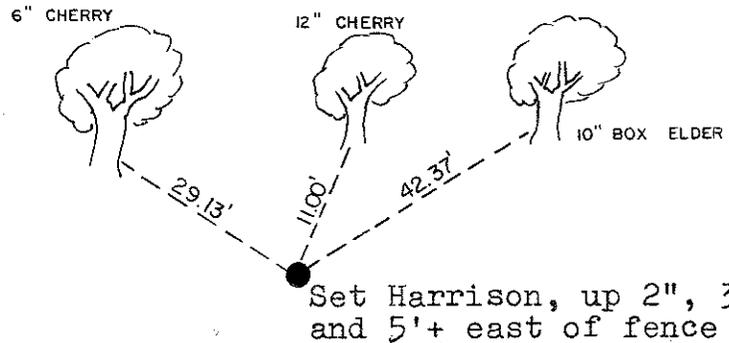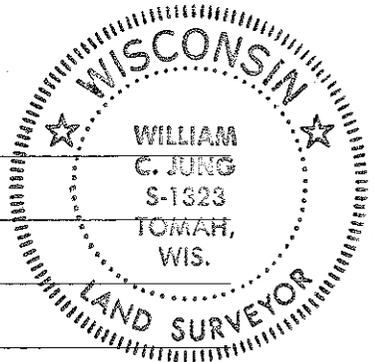

SIGN PLACED 6-11-90 H. Sime

(All trees double blazed with N&C's set)

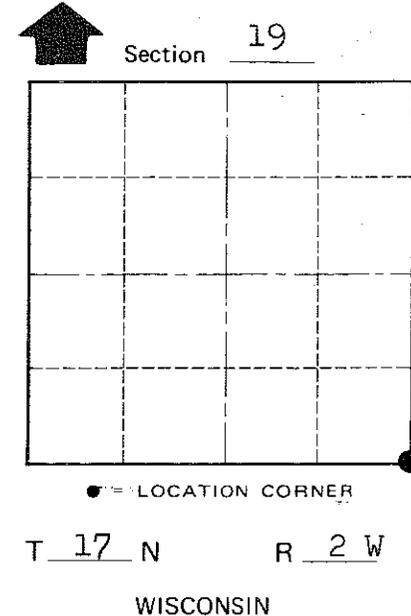

Approved: **HARLEY A. SIME**  
**MONROE CO. SURVEYOR**

SURVEY CONTROL ORDER

Horizontal \_\_\_\_\_  
Vertical \_\_\_\_\_

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~City, Village~~ Town Adrian  
County of Monroe

COUNTY SURVEYOR FORM NO. 1