


29

**U.S. PUBLIC LAND CORNER
MAINTENANCE**

**Corner ID : SE Sec. 5, T17N-R3W
21703050000**

<u>DATE</u>	<u>CREW</u>	<u>MONUMENT TYPE</u> -----
October 7, 2016	Zachariah P. Dechant Gary L. Dechant	Existing Harrison intact at fence corner. Set new sign 1' north.

<u>References:</u>	<u>Bearing</u>	<u>Distance</u>
1) Set 3/4" x24" round iron bar, down 6"	N13E	25.49'
2) Set 3/4"x24" round iron bar, down 6", 3' south of 8" Jack Pine	S27E	21.38'
3) Set 3/4"x24" round iron bar, down 6", 6' east of 10" Jack Pine	S32W	42.35'
4) Set 3/4"x24" round iron bar, down 6"	N70W	22.81'

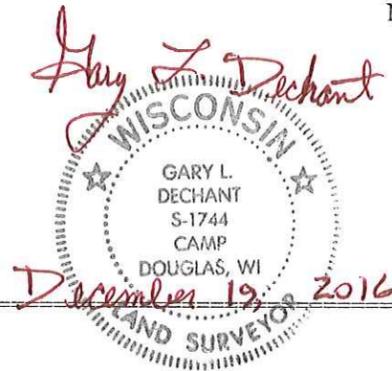

CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013


Nicholas M. Hillmer, P.L.S. 2909
Anderson Engineering of Minnesota, LLC.

CERTIFIED LAND CORNER

History of corner established since Original Government Survey

Ray Hurlburt found a stake and set a 2 inch pipe. In 1975 Harley Sime found and accepted Hurlburt's pipe and replaced it with a Harrison monument.

Description of evidence found

On January 23rd, 2013, Anderson Engineering of Minnesota located the Harrison monument flush with the ground and 0.75 feet southwest of a wood fence corner of a fence that runs north and southeast. A witness post with a survey marker sign was also found.

No. 29
21703050000



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

Nick Hillmer
Josh Oslund
Dan Greenwald



MONROE COUNTY
COORDINATE SYSTEM
NAD 1983 (2007)

HARRISON MONUMENT
Northing (Y) 389632.15
Easting (X) 642239.22

Base Station - 22 182W
Northing (Y) 408053.25
Easting (X) 679287.00



**See Reverse Side
For Maintenance**

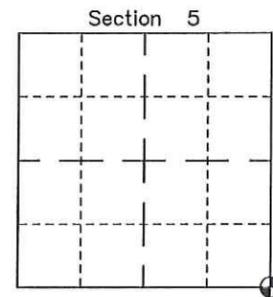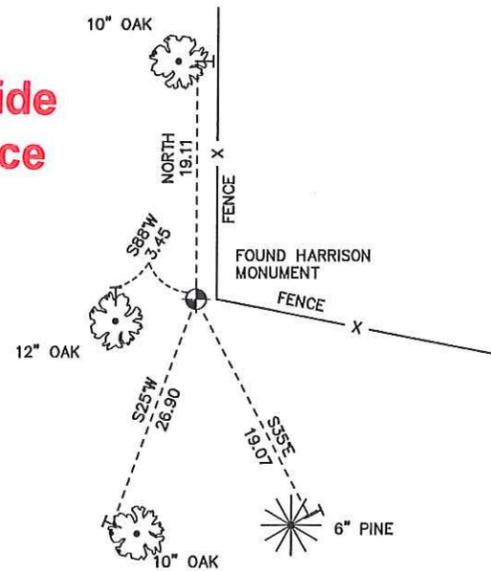

⊕ = LOCATION CORNER
Corner I.D. SE 5
T 17 N R 3 W
Town of Angelo
Monroe County, WI.

All distances are shown in U.S. Survey Feet.
Ties are to 60D nails set in trees.
Bearings are for tie reference purposes only.
Coordinates were derived from RTK GNSS procedures.

I, Harley A. Sime, do hereby certify that on the 17th day of July 19 75, I found (evidence) ~~(no evidence)~~ of the Southeast corner of Section 5, T 17 N, R 3 W, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 8th day of April 19 77.

History of original corner establishment:

Ray W. Hurlburt found an iron stake here and some signs of bearing trees. He set an iron pipe, 2"x109" up 2½" in June of 1940.

Description of corner evidence found:

Replaced existing 2" iron with a Harrison monument.

Approved: **HARLEY A. SIME**
MONROE CO. SURVEYOR



County Surveyor
Title

**See Reverse Side
For Maintenance**

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:
Set Harrison flush.

Witnesses to corner location:

Fritzlaff
Pietz

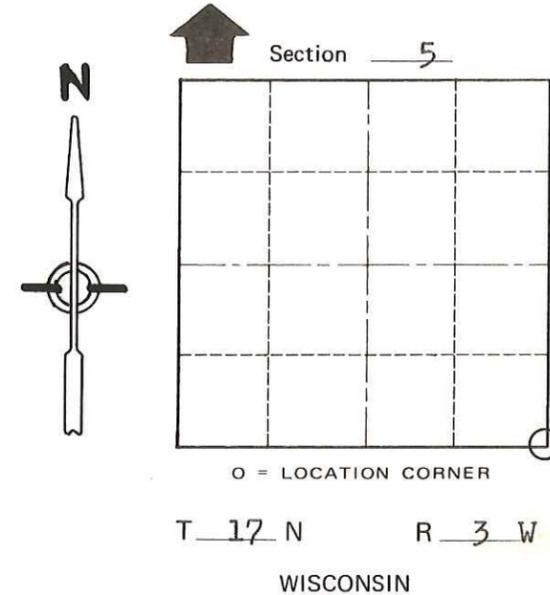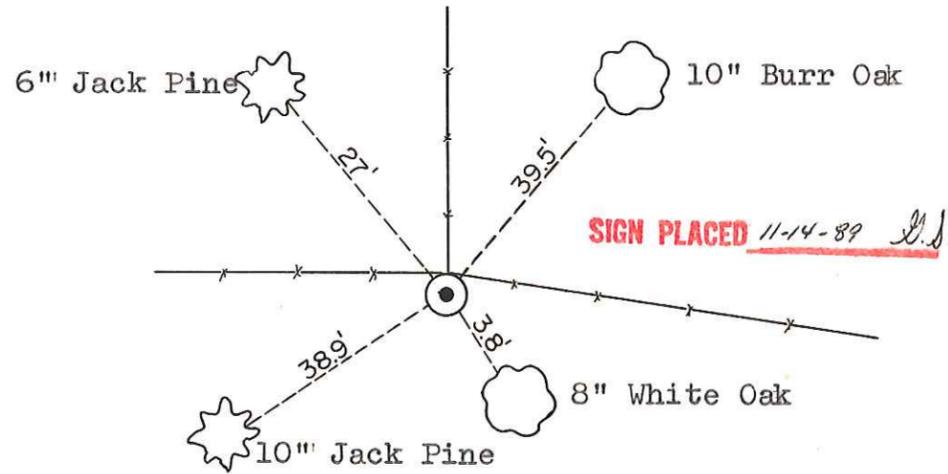

COUNTY SURVEYOR FORM NO. 1

SURVEY CONTROL ORDER

Horizontal _____
Vertical _____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town Angelo

County of Monroe