

CERTIFICATE

UPDATED  
CERTIFIED LAND CORNER

No. 30

21703050020

I, Harley A. Sime, do hereby certify that on the 17<sup>th</sup> day of July 1975, I found (evidence) (~~no evidence~~) of the South 1/4 corner of Section 5, T 17 N, R 3 W, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 8<sup>th</sup> day of April 1977.

County Surveyor  
Title

History of original corner establishment:

Fred A. Holden was here in April, 1907.

Description of corner evidence found:

Ran out the section and the existing irons agreed.  
Replaced 1 1/2" iron pipe with Harrison.

3/12/81  
The ex. I.P. was set by Bergman in January of 1933. *wcj*

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Set Harrison monument flush.


Witnesses to corner location:

Pritzlaff


Pietz

Note: The top portion of the Harrison Monument was broke off and 3 of the original ties had been destroyed. I took new ties to the broke off monument.

Trees are double blazed and dist. are to a nail set in a hack in the side of the tree.

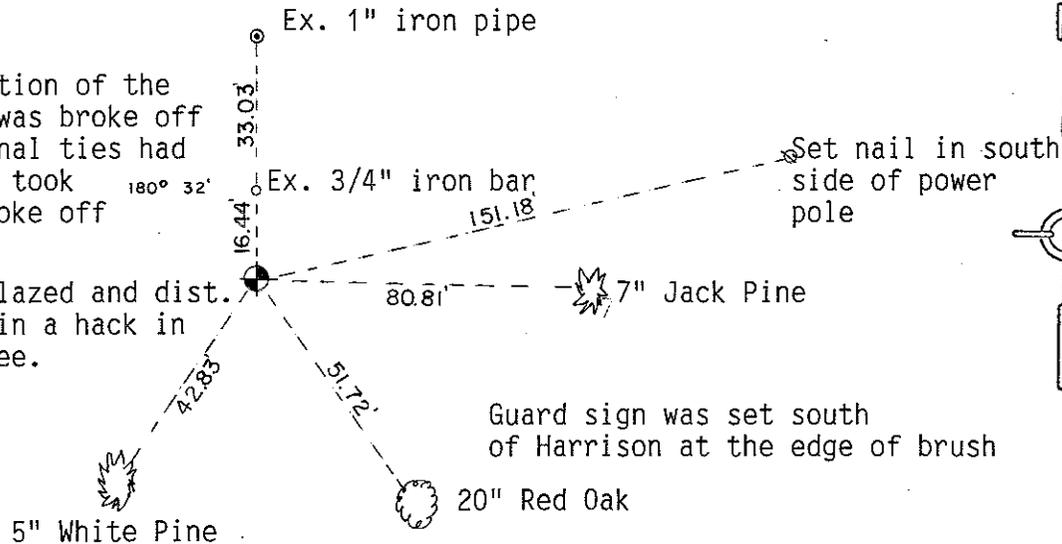

Guard sign was set south of Harrison at the edge of brush

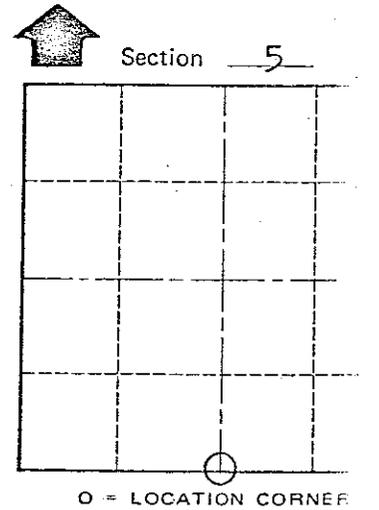

T 17 N R 3 W

WISCONSIN

Crew: Garold A. Sime  
Monroe County Surveyor

Dated: November 28th, 1989

John Kenworthy  
Brian Forsythe

WISCONSIN COORDINATE SYSTEM

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town Angelo

County of Monroe

COUNTY SURVEYOR FORM NO. 1

I, Harley A. Sime, do hereby certify that on the 17<sup>th</sup> day of July 1975, I found (evidence) (~~no evidence~~) of the South 1/4 corner of Section 5, T 17 N, R 3 W, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 8<sup>th</sup> day of April 1977.

History of original corner establishment:

Fred A. Holden was here in April, 1907.

Description of corner evidence found:

Ran out the section and the existing irons agreed.  
Replaced 1 1/2" iron pipe with Harrison.

3/12/81

The existing iron pipe was set by Bergman in January of 1933.

County Surveyor

Approved: **HARLEY A. SIME**  
**MONROE CO. SURVEYOR**



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Set Harrison monument flush.

Witnesses to corner location:

Pritzlaff

Pietz

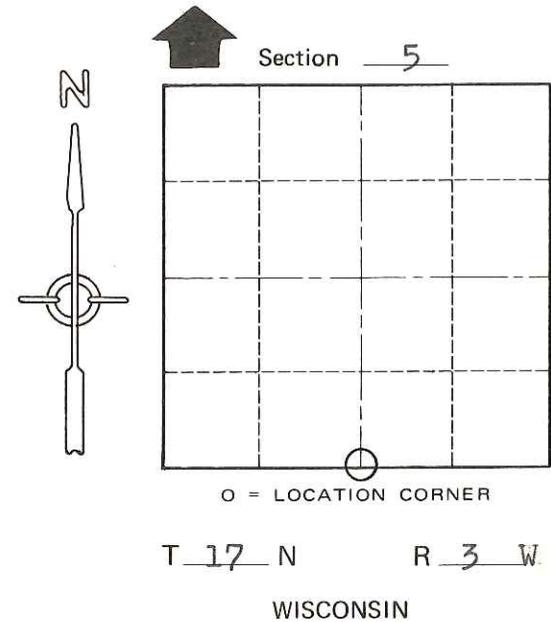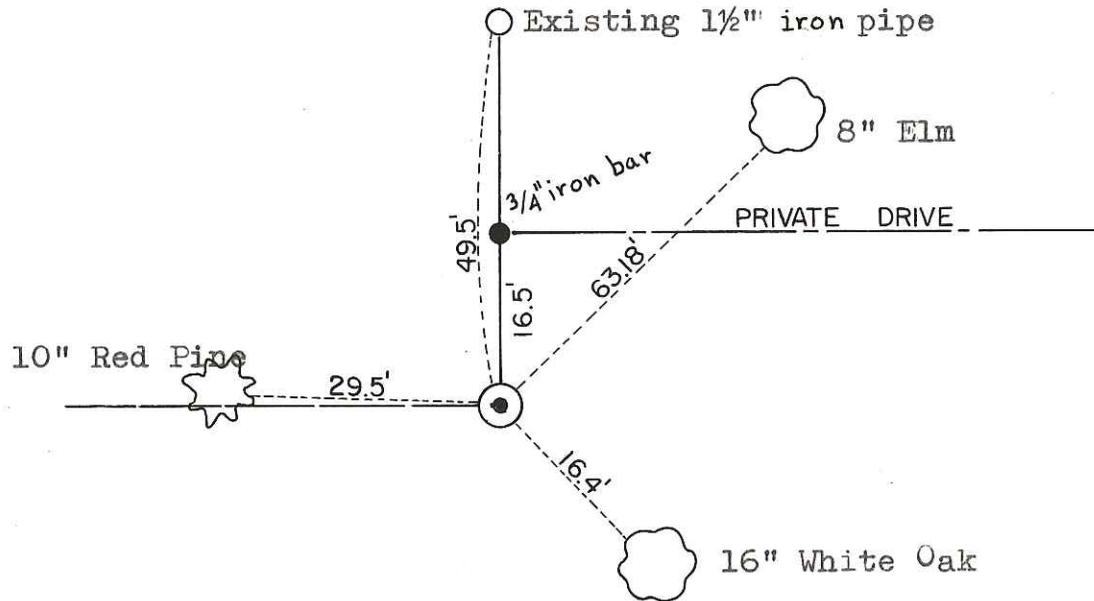

COUNTY SURVEYOR FORM NO. 1

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town Angelo

County of Monroe