

# 15

**U.S. PUBLIC LAND CORNER  
MAINTENANCE**

**Corner ID : E1/4 Sec. 6, T17N-R3W**

**21703062000**

<u>DATE</u>	<u>CREW</u>	<u>MONUMENT TYPE</u> -----
October 13, 2016	Zachariah P. Dechant Gary L. Dechant	Existing Harrison intact, down 3", 16' south of Grandview Road/Gage Ave intersection

References:

	<u>Bearing</u>	<u>Distance</u>
1) Set 3/4" x24" round iron bar, down 6" in Pine Grove	N52E	61.65'
2) Set 3/4" x2.5' iron pipe, down 6" in pine Grove 3' east of blazed 7" Red Pine	S47E	77.40'
3) Set 3/4" x24" round iron bar, down 6", 3' E & 6' S of woven wire fence corner S52W		42.05'
4) Set 3/4" x24" round iron bar, down 6"	N47W	64.98'

**Harrison and reference markers set on straight lines.**

*Gary L. Dechant*  
GARY L.  
DECHANT  
S-1744  
CAMP  
DOUGLAS, WI  
LAND SURVEYOR  
*December 19, 2016*

I, Harley A. Sime, do hereby certify that on the 17 day of July 19 75, I found (evidence) ~~(no evidence)~~ of the East 1/4 corner of Section 6, T 17 N, R 3 W, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 8th day of April 19 77.

History of original corner establishment:

Fred Holden set an iron well point here in May of 1910. He also found a stone at this corner.

Description of corner evidence found:

Replaced 3/4" iron bar with a Harrison monument.

County Surveyor **Approved: HARLEY A. SIME**  
Title **MONROE CO. SURVEYOR**

**See Reverse Side  
For Maintenance**

COUNTY SURVEYOR FORM NO. 1



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Set Harrison

Witnesses to corner location:

Pritzlaff

Pietz

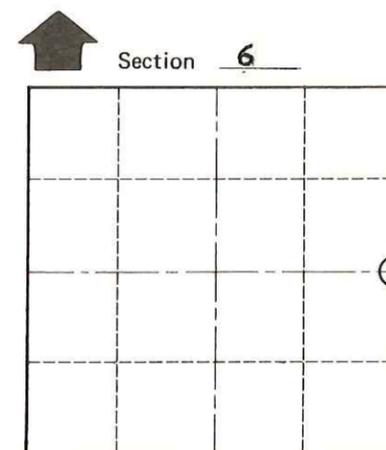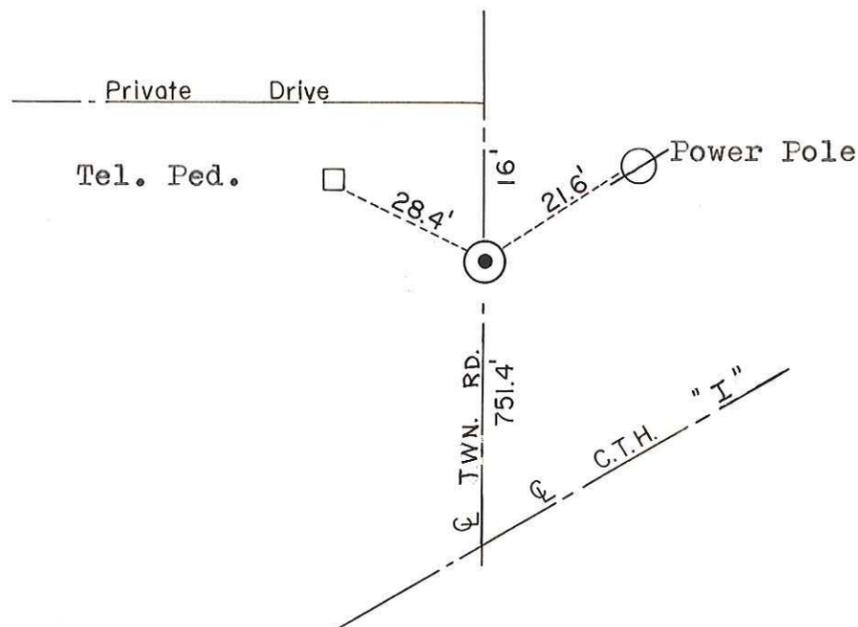

O = LOCATION CORNER  
T 17 N R 3 W  
WISCONSIN

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town Angelo

County of Monroe