

# CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909  
Anderson Engineering of Minnesota, LLC.

# CERTIFIED LAND CORNER

## History of corner established since Original Government Survey

In April of 1907 Fred Holden set an iron stake here. In 1936 David Blencoe set a Ford drive shaft at this corner. The 1940's McCoy boundary notes show a corner at this location. In April of 1980 William Jung found the McCoy boundary marker and accepted it as the corner.

## Description of evidence found

On September 10, 2012, Anderson Engineering of Minnesota located the McCoy monument, a 4 inch U.S. Army Corps of Engineers survey control mark disk set in concrete 0.3 feet below grade and 1.5 feet north of a white wood post.

No. 21703080000



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:



Nick Hillmer  
Josh Oslund  
Dan Greenwald

MONROE COUNTY  
COORDINATE SYSTEM  
NAD 1983 (2007)

MCCOY MONUMENT  
Northing (Y) 384372.35  
Easting (X) 642321.51

Base Station - 22 182W  
Northing (Y) 408053.25  
Easting (X) 679287.00

All distances are shown in U.S. Survey Feet.  
Ties are to 60D nails set in trees.  
Bearings are for tie reference purposes only.  
Coordinates were derived from RTK GNSS procedures.

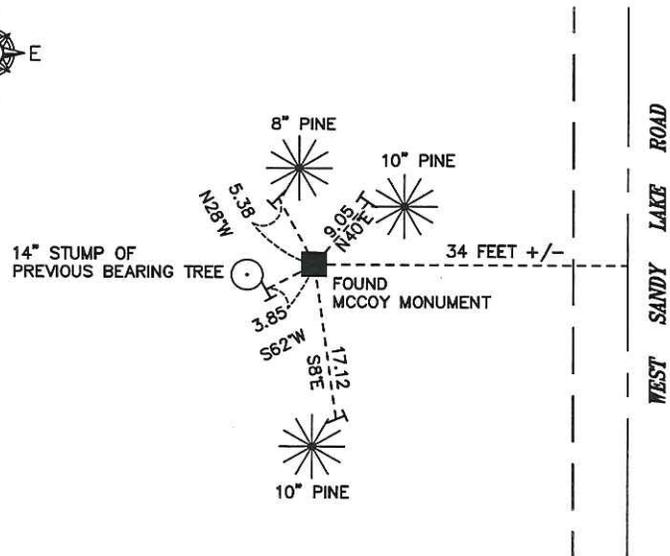

■ = LOCATION CORNER  
Corner I.D. SE 8  
T 17 N R 3 W  
Town of Angelo  
Monroe County, WI.

21703080000

I, William C. Jung, do hereby certify that on the 25<sup>th</sup> day of April 1980, I found (evidence) (~~reference~~) of the Southwest corner of Section 09, T 17 N, R 3 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 24<sup>th</sup> day of October 1980.

William C. Jung  
William C. Jung, R.L.S. 1323  
Title

History of corner establishment since Original Government Survey

Fred Holden set an iron stake at this corner in April of 1907. In 1936 David Blencoe set a Ford drive shaft at this corner. Government surveyors set a monument at this corner during the McCoy boundary survey of WWII.

Description of corner evidence found:


I found the McCoy boundary marker.

Approved: **HARLEY A. SIMÉ**  
**MONROE CO. SURVEYOR**



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

William Jung  
Scott Sowers  
Todd Tormoen

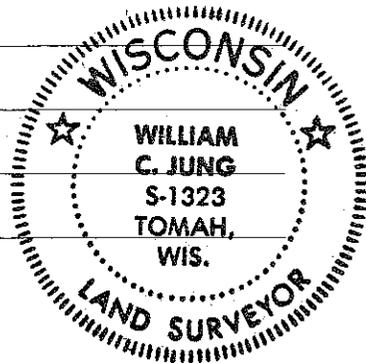

ALL TREES DBL. BLAZED WITH NAIL AND CAPS SET

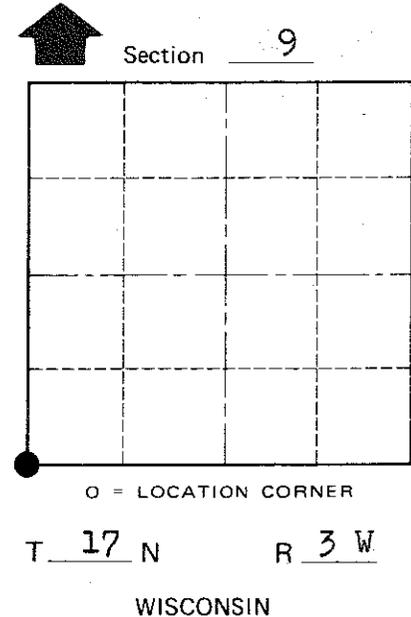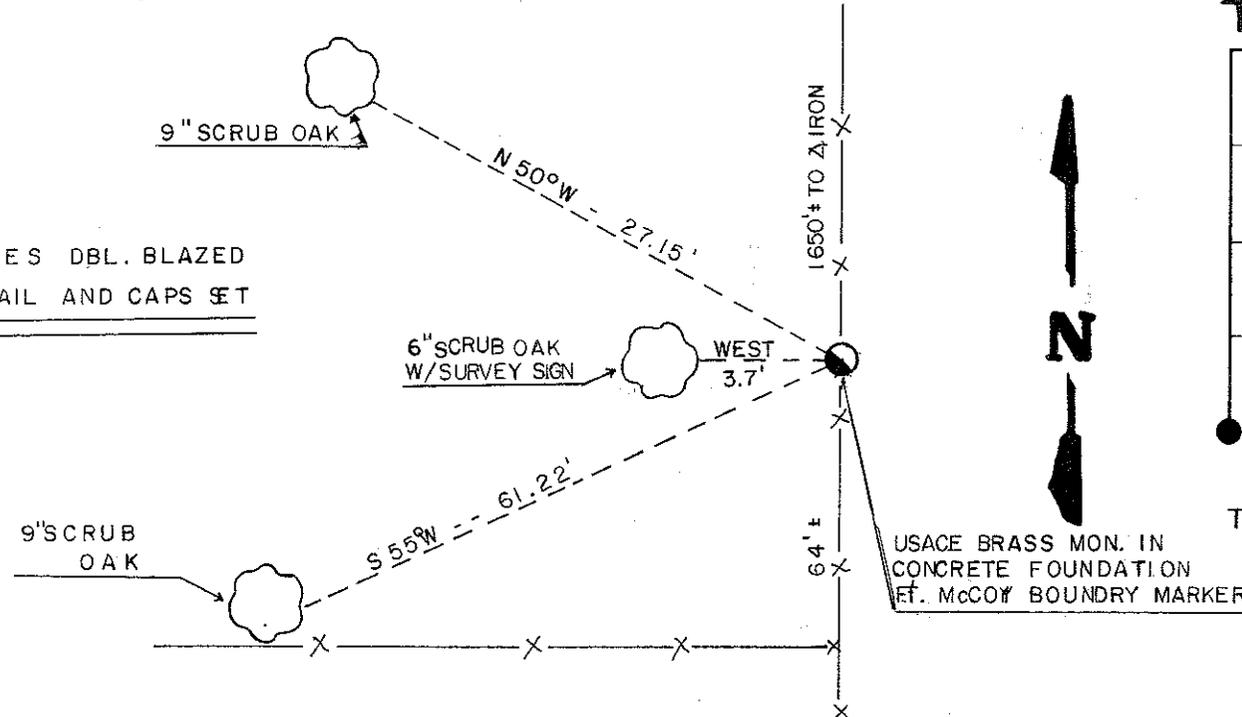

COUNTY SURVEYOR FORM NO. 1

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town Angelo  
County of Monroe  
Wisconsin