

CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909
Anderson Engineering of Minnesota, LLC.

CERTIFIED LAND CORNER


History of corner established since Original Government Survey

Old highway maps show a distance to this corner from the NW corner of Section 22. The Town Road records of May 1885 call for the road to be on the section line. In July of 1981 Harley A. Sime set a Harrison monument at the original government survey distances from the NE corner of Section 23 and the SW corner of Section 23. Sime stated that this fits the road map distance from the NW corner of Section 22 reasonably well. It also fits a pattern, proportionate distance north of highway centerline with all corners between the NW corner of Section 20 and the N 1/4 corner of Section 23. The 1935 highway map shows that the new Highway "16" would shift south of the old road. This agrees with Sime's findings.

Description of evidence found

On August 15th, 2012, Anderson Engineering of Minnesota located the Harrison monument flush with the ground.

No. 21703150000

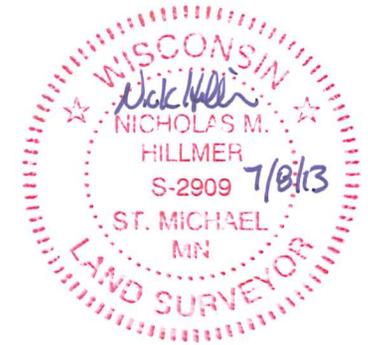

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Anderson Engineering of Minnesota



Witnesses to corner location:

Nick Hillmer
Josh Oslund
Dan Greenwald

MONROE COUNTY
COORDINATE SYSTEM
NAD 1983 (2007)

HARRISON MONUMENT
Northing (Y) 379046.52
Easting (X) 653027.15

Base Station - 22 182W
Northing (Y) 408053.25
Easting (X) 679287.00

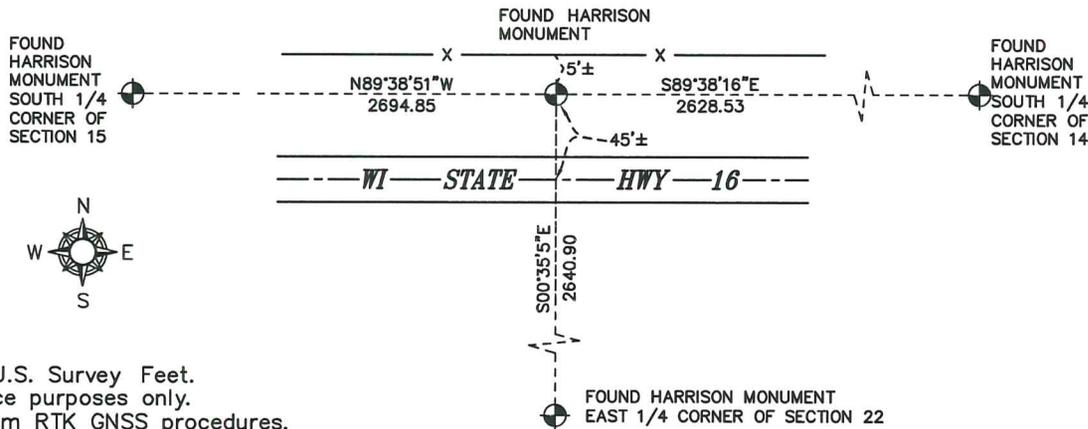

⊙ = LOCATION CORNER
Corner I.D. SE 15
T 17 N R 3 W
Town of Angelo
Monroe County, WI.

All distances are shown in U.S. Survey Feet.
Bearings are for tie reference purposes only.
Coordinates were derived from RTK GNSS procedures.

21703150000

I, Harley A. Sime, do hereby certify that on the 28th day of April 1981, I found ~~(no evidence)~~ (no evidence) of the NW corner of Section 23, T 17 N, R 3 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 3rd day of July 1981.

Harley A. Sime, R.L.S. 355

County Surveyor
Title

History of corner establishment since Original Government Survey

Old and new highway maps show a distance to this corner from the NW corner of Section 22. The Town Road Records of May, 1885, call for the road to be on the section line. Surveyors from McCoy were at this corner during the boundary survey done during WWII.

Description of corner evidence found:

This corner was set at the original government survey distances from the NE corner of Section 23 and the SW corner of Section 23. This fits road map distance from NW corner of Section 22 reasonably well. Also fits a pattern, proportionate distance north of highway centerline, with all corners between the NW corner of Section 20 and the NW corner of Section 23. The 1935 highway map shows that the new Highway "16" would shift South of the old road. This agrees with our findings and present conditions.

COUNTY SURVEYOR FORM NO. 1



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

G. Dechant

C. Pietz

Approved: **HARLEY A. SIME**
MONROE CO. SURVEYOR

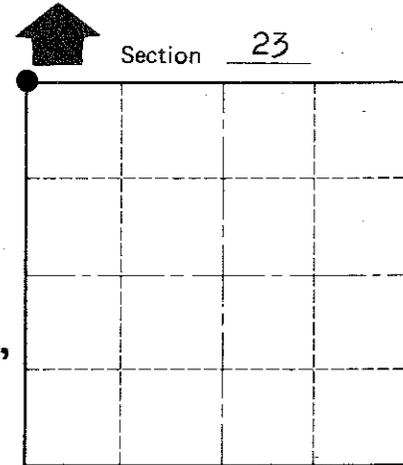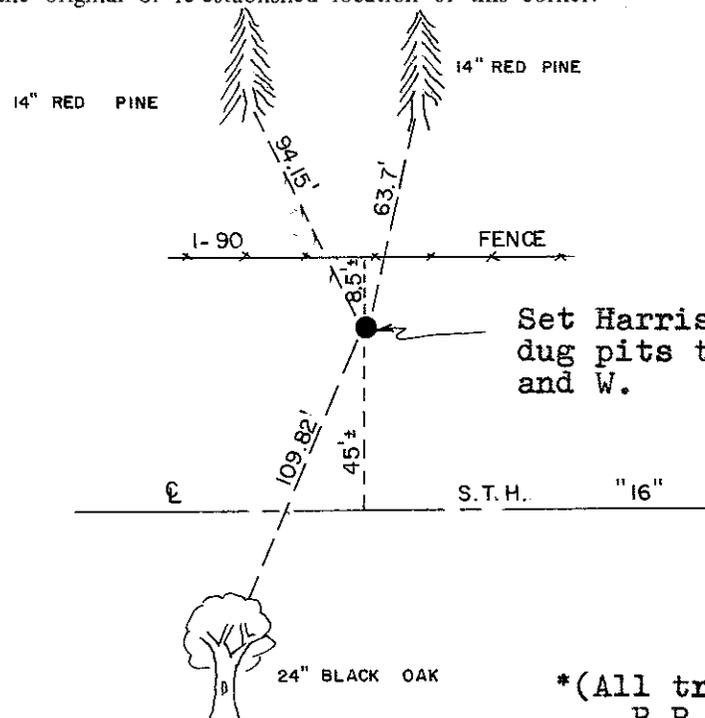

● = LOCATION CORNER
T 17 N R 3 W
WISCONSIN

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

(All trees double blazed with R.R. spikes set)

~~City Village~~ Town Angelo
County of Monroe