


CERTIFICATE

UPDATED
CERTIFIED LAND CORNER

No. 67

PAGE 2

21703160000

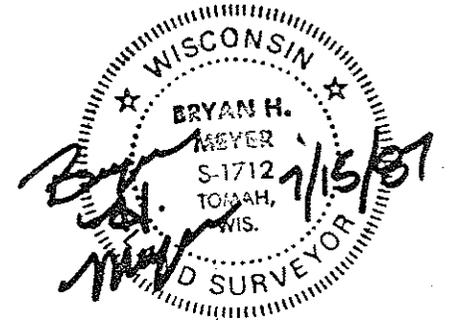

I, Bryan H. Meyer, do hereby certify that on the 14th day of July 1987, I found (evidence) ~~(no evidence)~~ of the Northwest corner of Section 22, T 17 N, R 3 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 15th day of July 1987.

Bryan H. Meyer
Registered Land Surveyor

Title

History of corner establishment since Original Government Survey

I re-established this corner back in July of 1987 and set a cast iron Harrison marker.

Description of corner evidence found:

The County Surveyor's Office was notified by Mr. Norb Smith, Monroe County Highway Commissioner, that C.T.H. "A" was to be upgraded and repaved and that this corner location was in danger. One additional tie was obtained and the Harrison marker was removed. Upon completion of the road work, I went back and set a 1/4" x 30" round iron bar at the corner location in the new hot-mix paving.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:


Crew: Meyer, Wilhite, Kenworthy
Date: July 14, 1987
Weather: P. Cloudy
Witnesses to corner location:

Bryan "Oscar" Meyer

1992 Crew: Meyer, Cooper
11/11/92


Dallas "Houston" Wilhite

John "Rory" Kenworthy

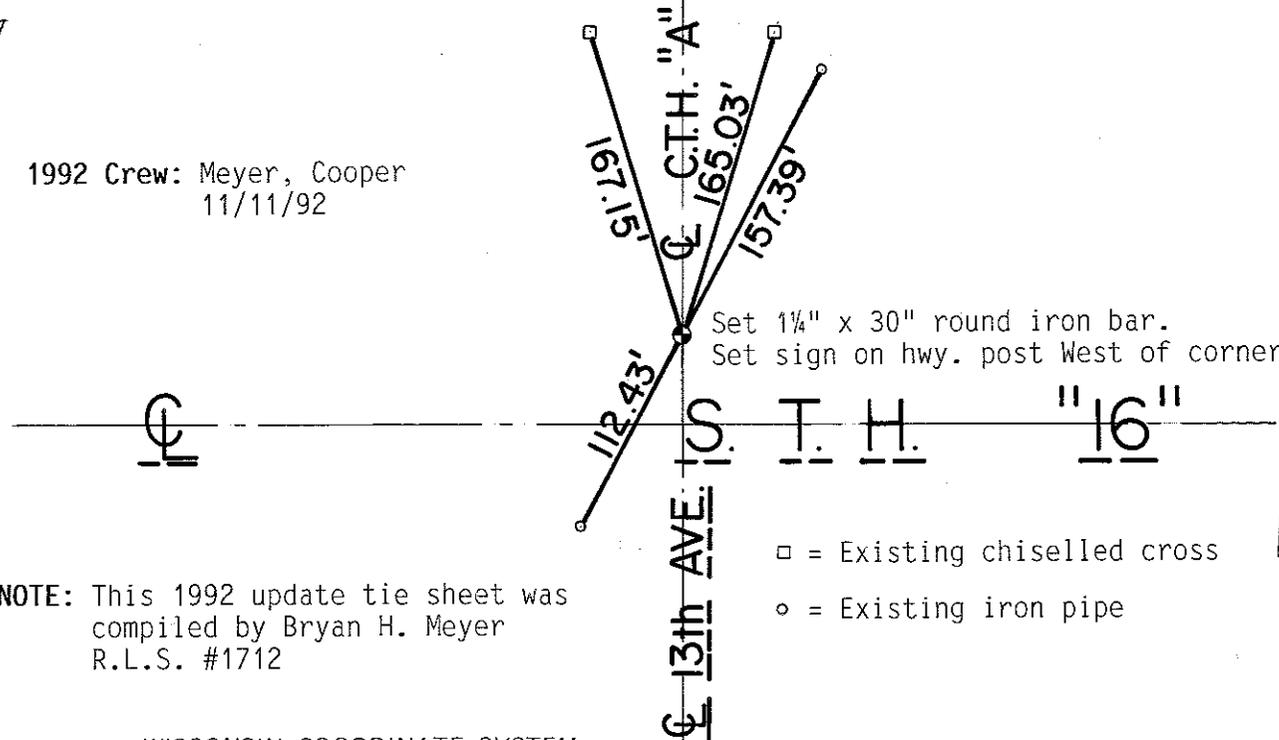

Set 1/4" x 30" round iron bar.
Set sign on hwy. post West of corner.

- = Existing chiselled cross
- = Existing iron pipe

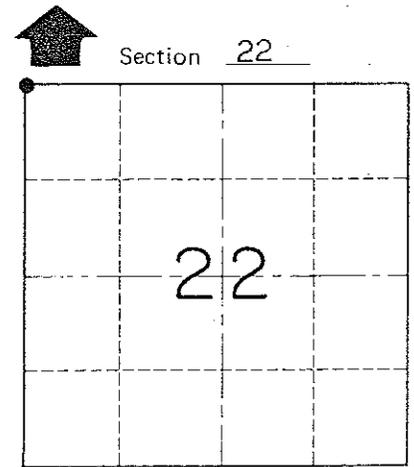

● = LOCATION CORNER
T 17 N R 3 W
WISCONSIN

NOTE: This 1992 update tie sheet was compiled by Bryan H. Meyer
R.L.S. #1712

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~City, Village or~~ Town of Angelo
County of Monroe

COUNTY SURVEYOR FORM NO. 1

CERTIFIED LAND CORNER

No. 67

See New Sheet

History of corner establishment since Original Government Survey

No recorded history.

Description of corner evidence found:

I set this corner on line with the Northeast and North 1/4 corners of Section 22 and on line with the centerline projection of 13th Avenue from the North. The distance to the North 1/4 corner matches the Original Notes exactly!!



do hereby
4th day
19 87, I found
 the Northwest
T 17 N,
 Meridian, and I re-
 g to the Wisconsin
 ed hereon.

July 19 87.
[Signature]
 Surveyor

ness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

te, Kenworthy
 7

Set chiselled cross in
 NE end of stone gate.

Set chiselled cross in
 NW end of stone gate.

Set cast iron Harrison
 marker, down 2"±, 46.7
 feet North of E Hwy. "16"

34.92'
 Set 1"x14" iron pipe

S.T.H.

"16"

Set sign and post 18.3'
 WSW of corner on the East
 side of a STOP sign.


Set 3/4"x30" iron iron pipe
 on South side of R/W post.

13th
 Ave.

167.19'

165.03'

112.43'

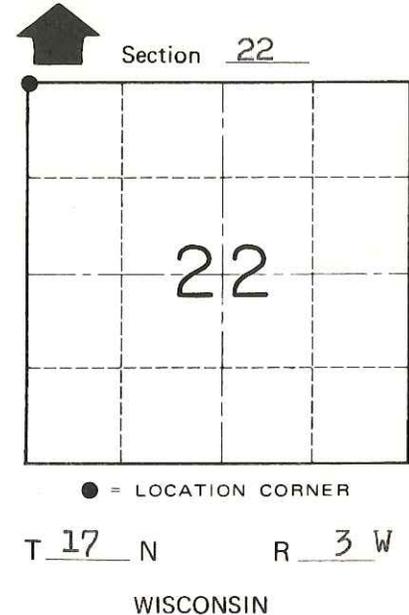

WISCONSIN COORDINATE SYSTEM

East (X)	North (Y)	Elevation (Z)	Zone

~~City, Village or~~ Town of Angelo

County of Monroe