

CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909
Anderson Engineering of Minnesota, LLC.

CERTIFIED LAND CORNER

History of corner established since Original Government Survey

H.F. Schroeder was here in April of 1897. Fred Holden was here in April of 1902. The McCoy boundary notes show a corner at this location. William Jung found a pipe in December of 1982 and replaced it with a Harrison monument. In July of 1987 Bryan Meyer found the monument to be in question. According to Meyer, the location would cause problems with the Town Road which runs along the south line of the SE 1/4-SW 1/4 of Section 22. It would also have made the west line of Section 22 56.5 feet longer than the original notes. Meyer set this corner on line with the southeast corner and south quarter corner of Section 22 and at the same distance from the south quarter corner as the old Harrison location.

Description of evidence found

On September 11th, 2012, Anderson Engineering of Minnesota located the Harrison monument 0.1 feet above the grade and 0.8 feet east of a metal fence post with survey marker sign.

No. 21703210000



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:



Nick Hillmer
Josh Oslund
Dan Greenwald

MONROE COUNTY
COORDINATE SYSTEM
NAD 1983 (2007)

HARRISON MONUMENT
Northing (Y) 373799.07
Easting (X) 647741.99

Base Station - 22 182W
Northing (Y) 408053.25
Easting (X) 679287.00

All distances are shown in U.S. Survey Feet.
Ties are to 60D nails set in trees.
Bearings are for tie reference purposes only.
Coordinates were derived from RTK GNSS procedures.

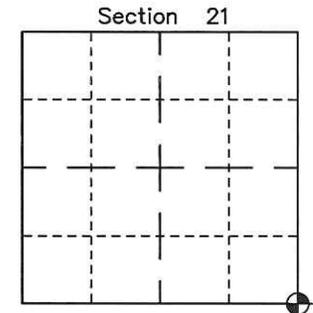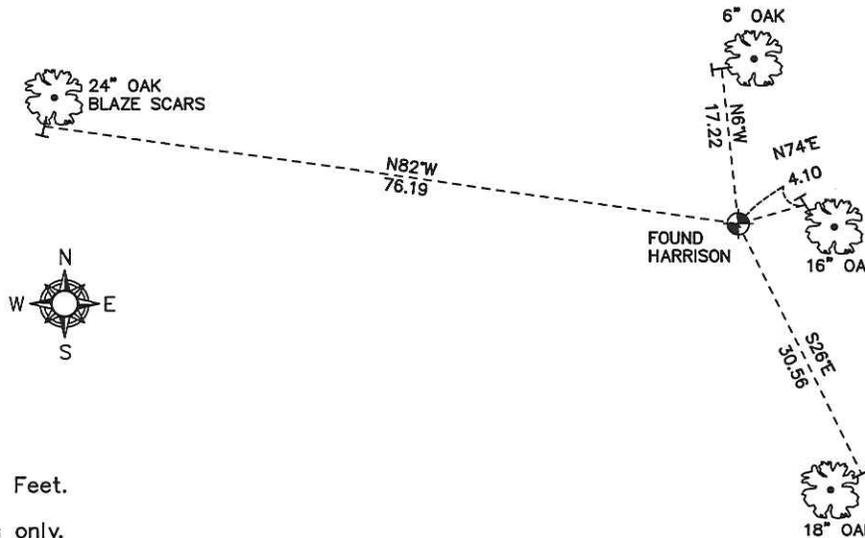

⊕ = LOCATION CORNER
Corner I.D. SE 21
T 17 N R 3 W
Town of Angelo
Monroe County, WI.

21703210000

I, Bryan H. Meyer, do hereby certify that on the 10th day of July 1987, I found (evidence) ~~of the~~ of the Southwest corner of Section 22, T 17 N, R 3 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 15th day of July 1987.

Bryan H. Meyer
 Registered Land Surveyor
 Title

History of corner establishment since Original Government Survey
 H. F. Schroeder, Deputy County Surveyor, was here in April of 1897. Fred Holden was here in April of 1902. Surveyors from Fort McCoy were here in April of 1945 and set a 1" iron pipe at a location that they call the "NW corner of Sec. 27". This pipe was found by W. C. Jung in December of 1982 and replaced with a Harrison marker.

Description of corner evidence found:
 After surveying out the West 1/2 of Section 22, I found the location of Mr. Jung's corner questionable. It would cause problems with the Town Road which runs along the South line of the SE1/4-SW1/4 of Section 22. It would also have made the West line of Section 22 56 1/2 feet longer than the Original Notes. I discussed this problem with Mr. Jung and he agreed that it should be moved. I set this corner on line with the Southeast and South 1/4 corners of Section 22 and at the same distance from the South 1/4 corner as the old Harrison location.




COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:


Crew: Meyer, Wilhite, Kenworthy
 Date: July 10, 1987 - 12:00 Noon
 Weather: Humid, Hot, Humid!

Witnesses to corner location:

Bryan H. Meyer
Dallas Wilhite
John "Rory" Kenworthy

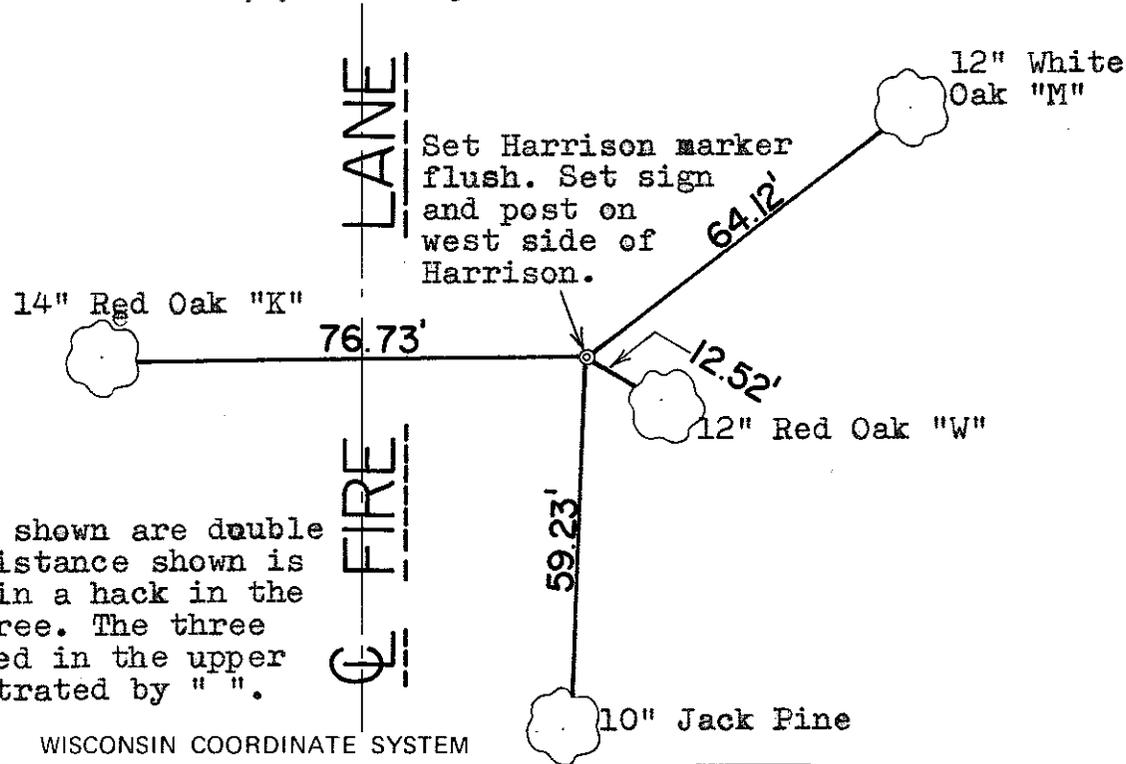

The four trees shown are double blazed; each distance shown is to a nail set in a hack in the side of each tree. The three Oaks are scribed in the upper blaze as illustrated by " ".

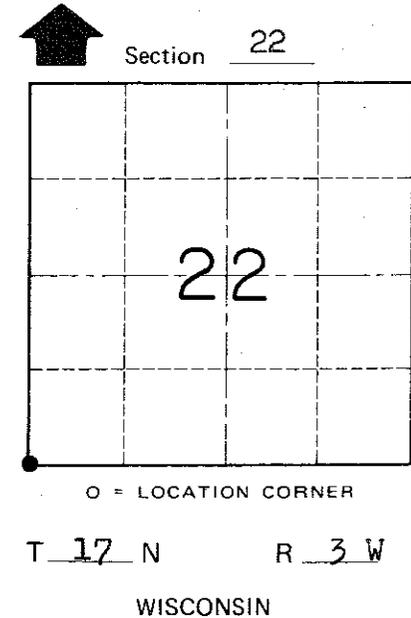

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City/Village or Town of Angele
 County of Monroe

I, William C. Jung, do hereby certify that on the 29th day of December 1982, I found (evidence) ~~no evidence~~ of the Northwest corner of Section 27, T 17 N, R 3 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 27th day of Jan. 1983.

William C. Jung
Deputy County Surveyor
Title

History of corner establishment since Original Government Survey

Hamilton LaRue was at this corner in April of 1897. Holden was at this corner in April of 1902. According to the McCoy boundary notes, a 1" iron pipe was set at this corner in April of 1945.

Description of corner evidence found:

I found the iron pipe, removed it, and replaced it with a Harrison marker.

Approved: **HARLEY A. SIME**
MONROE CO. SURVEYOR


COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

William Jung



Bryan Meyer

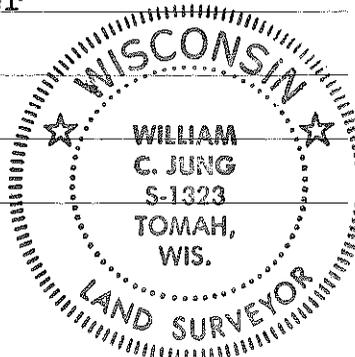

LANE
FIRE

Found 1 3/8" x 38" I.P. slightly bent, and replaced it with a Harrison monument, up 2" Dug pit S74°E, 9.5' away, also set 7' Oak post to N. E. of corner, up 4', 13" away from corner.

All B.T.'s double blazed; each dist. to a nail in a hack on the side of the tree.

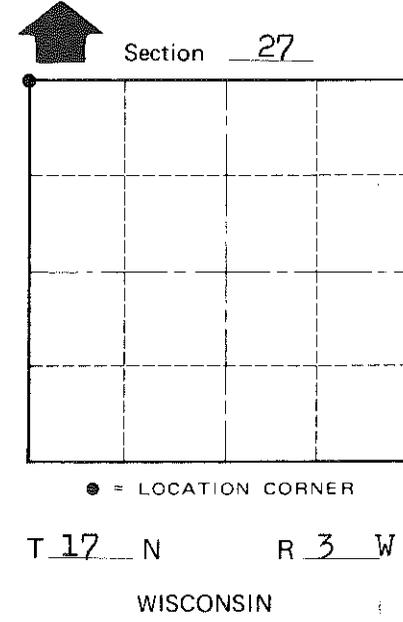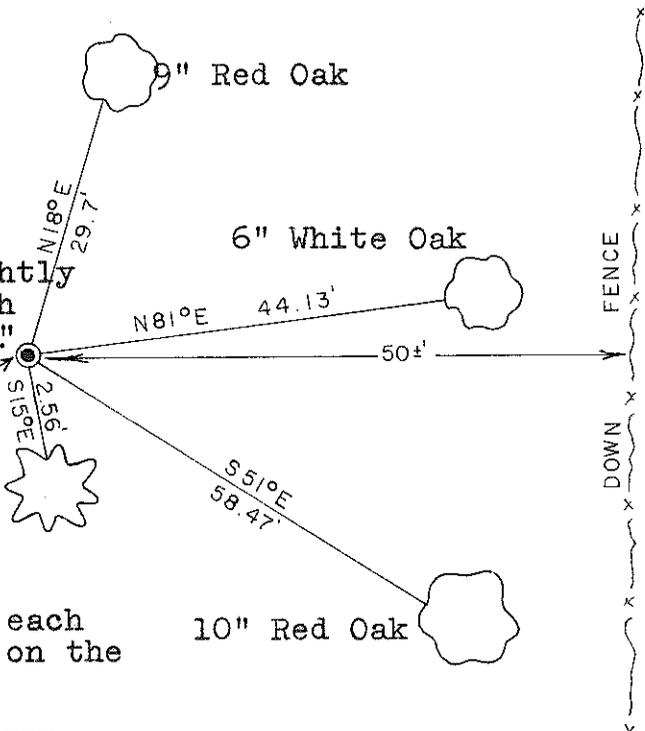

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town of Angelo
County of Monroe